


The copying, distribution and utilization of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem. §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen. PHENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

Mechanical data (according to IEC 61076-2-101)	
Locking thread	M12 Standard
Material	
Flange housing	V4A
Sealing gasket	EPDM
Temperature range	-40 °C to +85 °C

further information:
- see installation recommendation SACC-M12 NUT PRESS

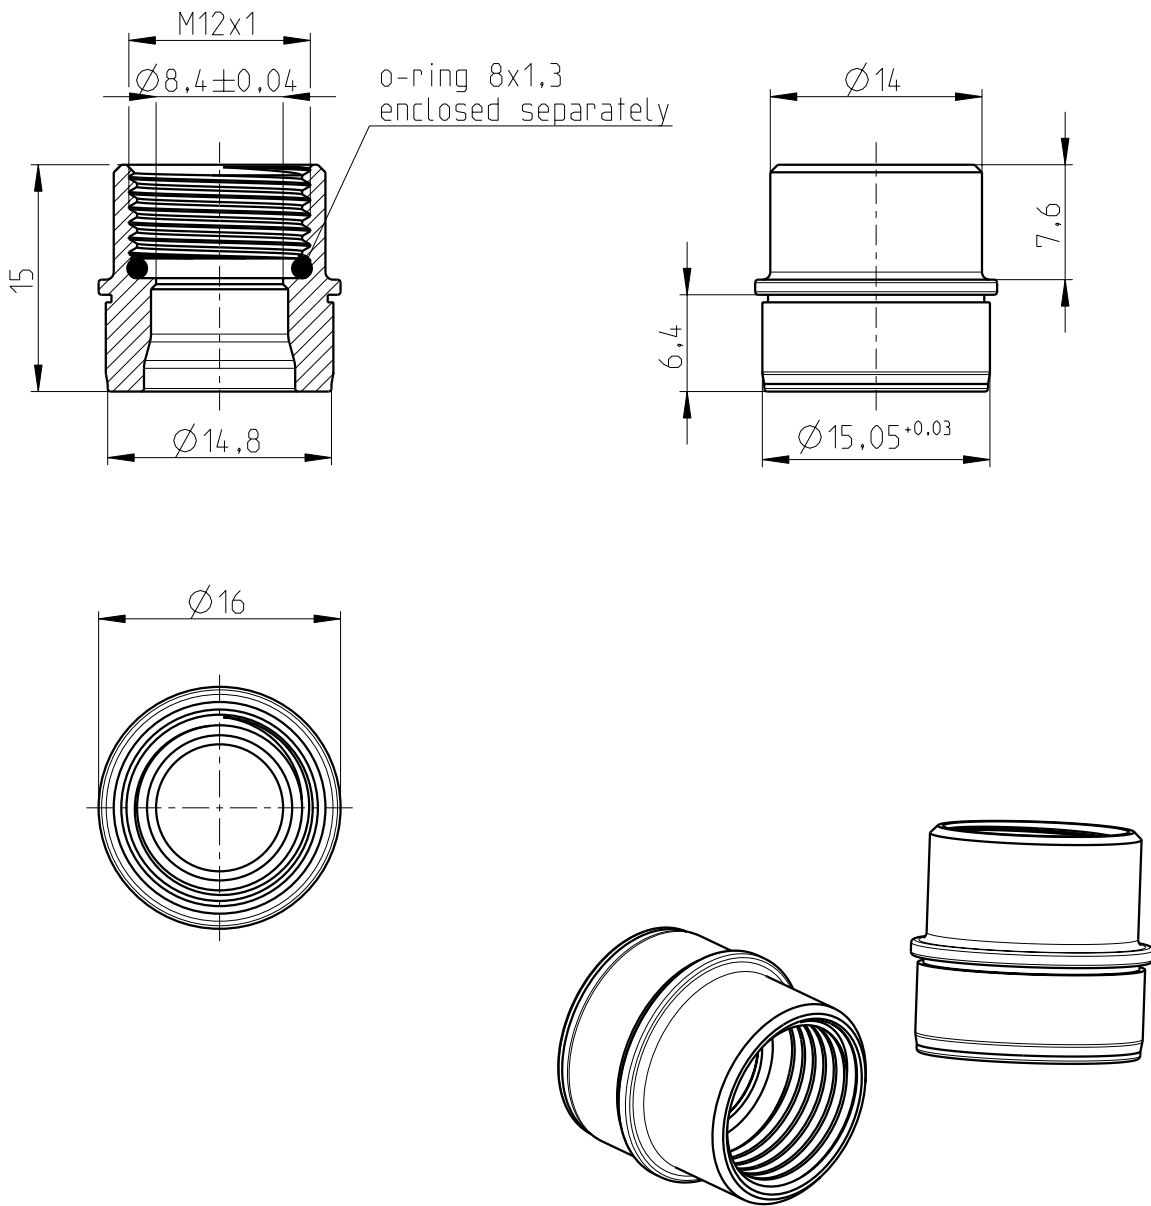

All specified data refers to the mounted M12 installation plugs $\geq$ IP54 and requires that the connector pair be correctly plugged and locked. Recommended tightening torque 0,4Nm. Influences from wires, cables or PCB mounting are also to be taken into consideration.

general tolerance acc. to DIN ISO 2768-c			technical changes reserved		Index 0 / 2017-11-16		scale: 2:1		
design	date	name	Series DSIV M12 housing screw connection female Ø16 / press-in version					page: 1 of: 1	
chk.									
			drawing-no.:		BS-00000006E00		doc.-no.:	01096237	
			order-no.:		1053969				
			article designation:		SACC-M12 NUT PRESS V4A				