
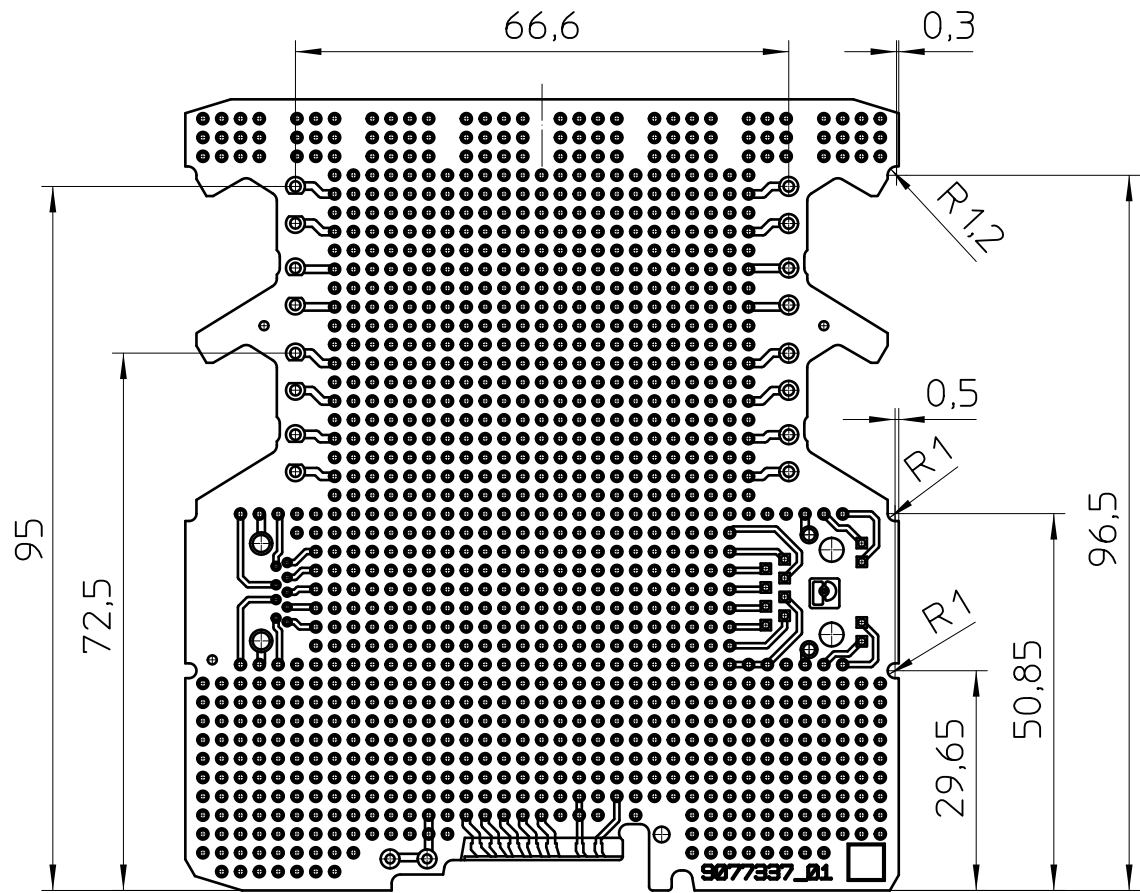


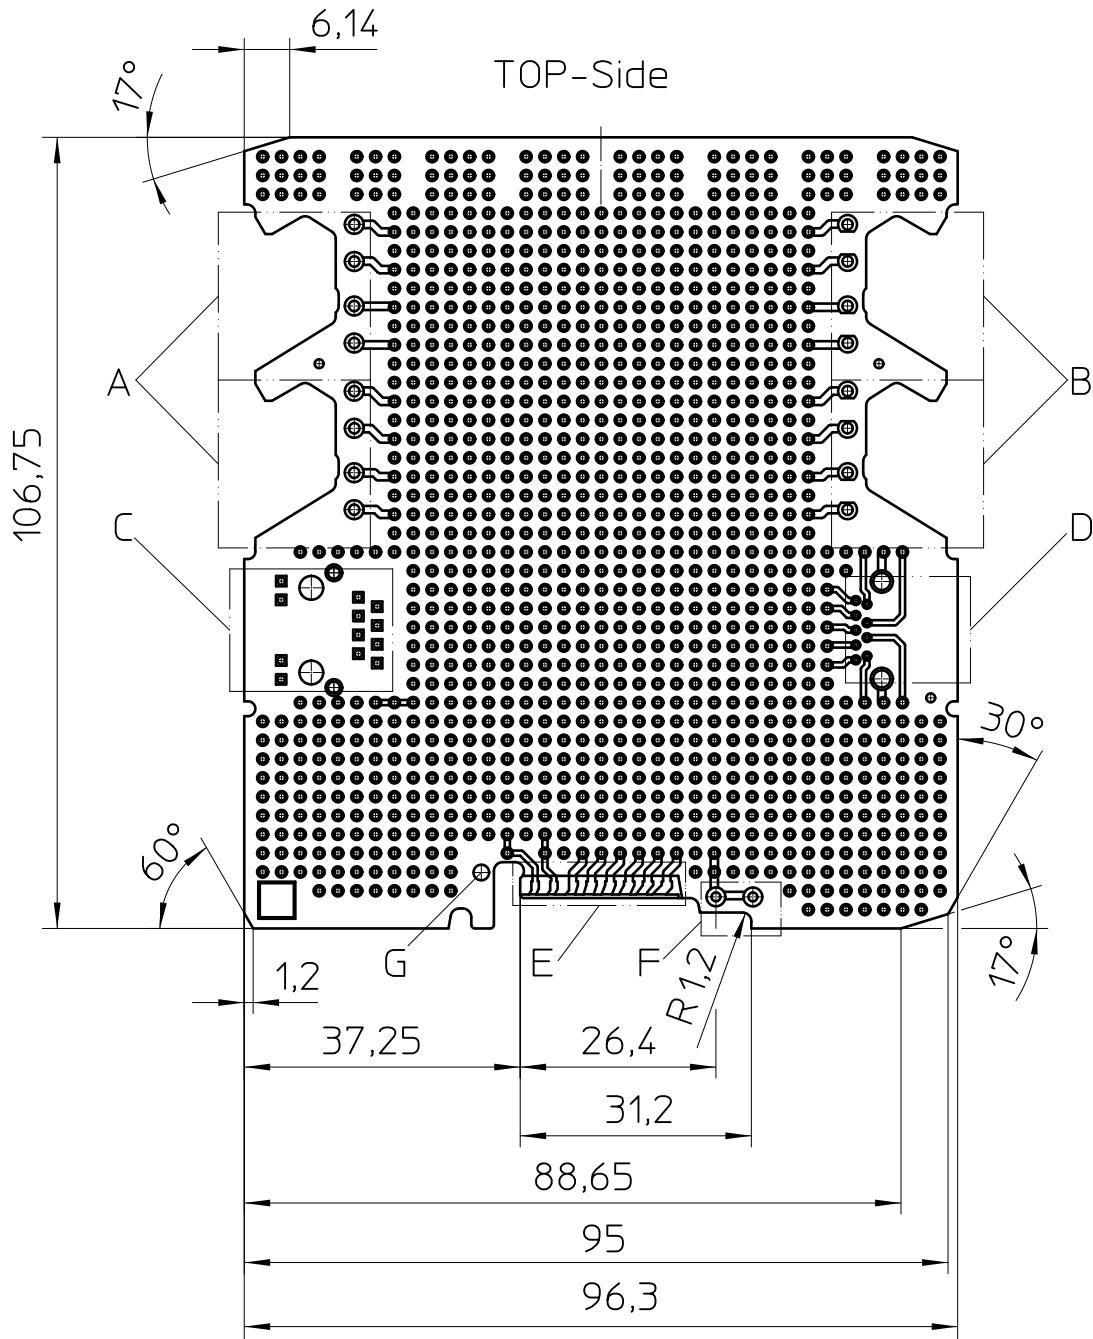

General Information:

- Recommended PCB
- Simplified representation
- Document excluded from change process
- CAD data see download-center on www.phoenixcontact.com
- Dimensions in millimeters [mm], angles in degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Tolerances for PCB:
 - dimensions ≤ 30 : $\pm 0,10$ / $R \pm 0,2$ / $\pm 1^\circ$
 - dimensions > 30 : $\pm 0,15$ / $R \pm 0,2$ / $\pm 1^\circ$
 - symmetry: 0,2
- Thickness PCB: $t = 1,6 \pm 0,2$
- Dot matrix pitch: 2,54mm ; drill size: $\phi 1$
- Application: ICS25-BC100x110-V ... DEV-KIT

- A) Area for ICC25-H/4L5,0
- B) Area for ICC25-H/4R5,0
- C) Area for VS-08-BU-RJ45/LP-1
- D) Area for KUSBX-AS1N9-1-BL30, 3,0A
- E) Area for TBUS8-25,0-PPPPPPSS
- F) Area for ICS-FE-CONTACT
- G) Hole for latching with ICS25-B100x98-V ...

 DIN A3		document-No. / RI 01160852 / 01		date 07.01.2022	scale 1:1
		ident.-No. 1054082		document-type TECDOC 2D_PCB-Outline	
		description ICS-DEV-PCB-01			
page 1 of 1					