


The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Rechtl. Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen. PHOENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg


Recommendation for the PCB-Layout
M12 2/3/4/5-pole pin / socket
A-/B-/D-coding with shield connection

PCB layout
(advice)

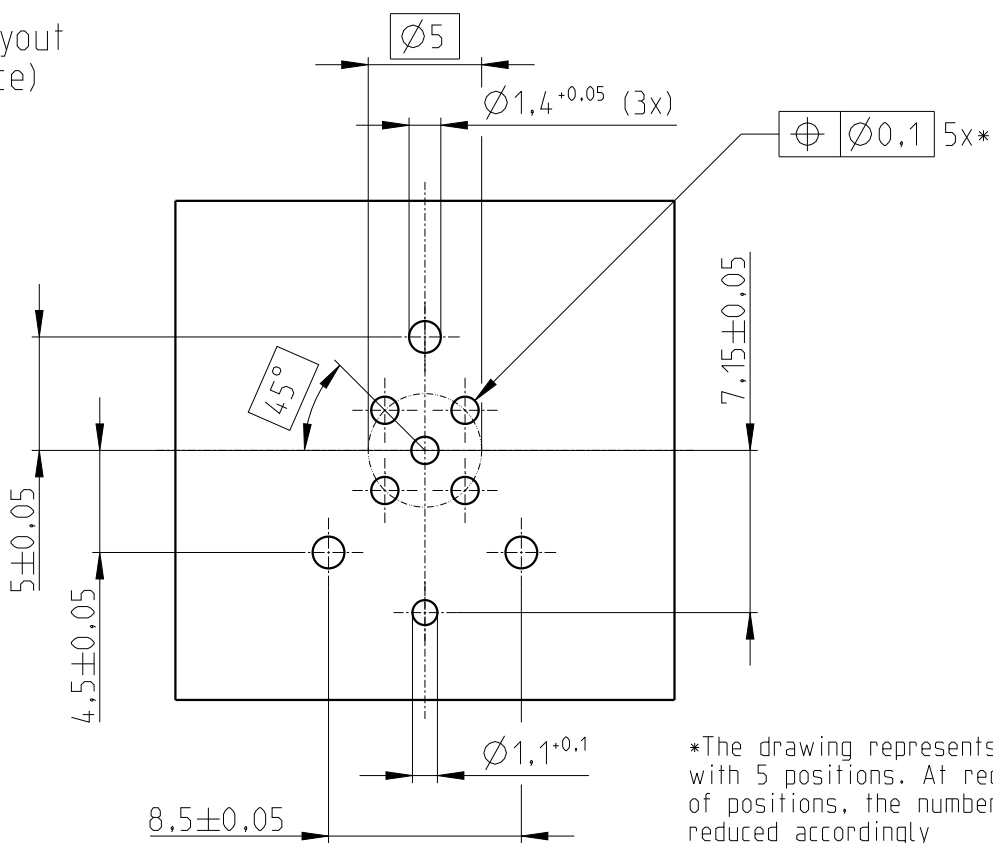

*The drawing represents connector with 5 positions. At reduced number of positions, the number of holes is reduced accordingly

Blocking surface
on PCB

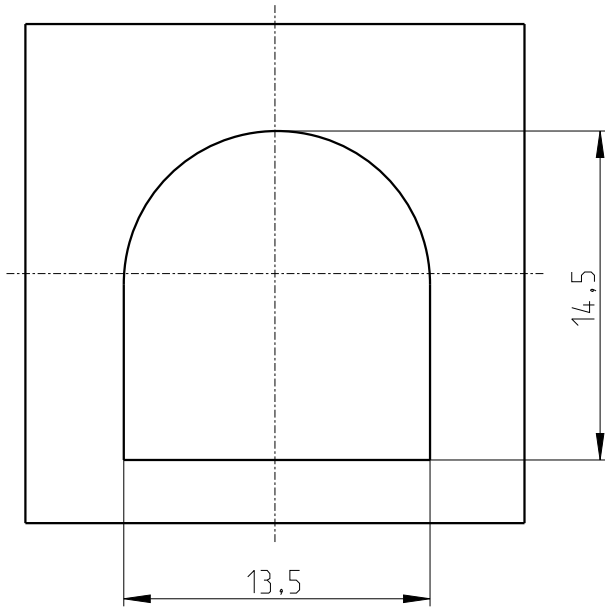

Recommended solder paste thickness 150 µm

Typ	Pin [mm]	Hole Ø [mm]	Residual ring Ø [mm]	Template Ø [mm]
Contact	See brochure "Connectors for SMT production"			
Shielding Pin	0,8x0,2	1,1	2,1	2

	Datum	Name
Bearb.	2022-01-12	coha01



Technische Änderungen vorbehalten	Dok.-Nr.: 097160616	Index B / 2022-06-01	Blatt: 1 / 1
technical changes reserved	doc.-no.: 097160616	Index B / 2022-06-01	page: 1 / 1