
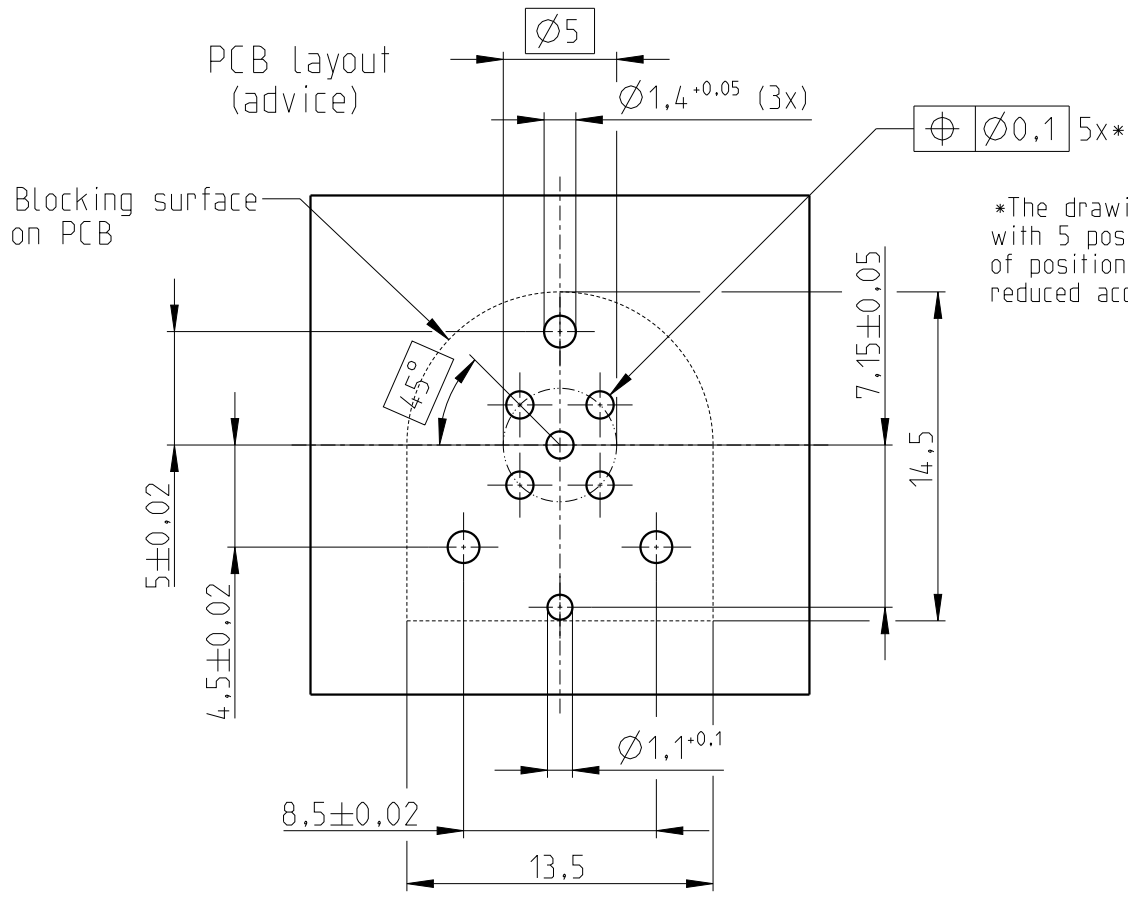
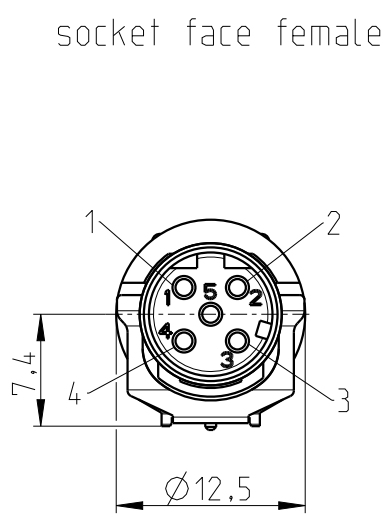


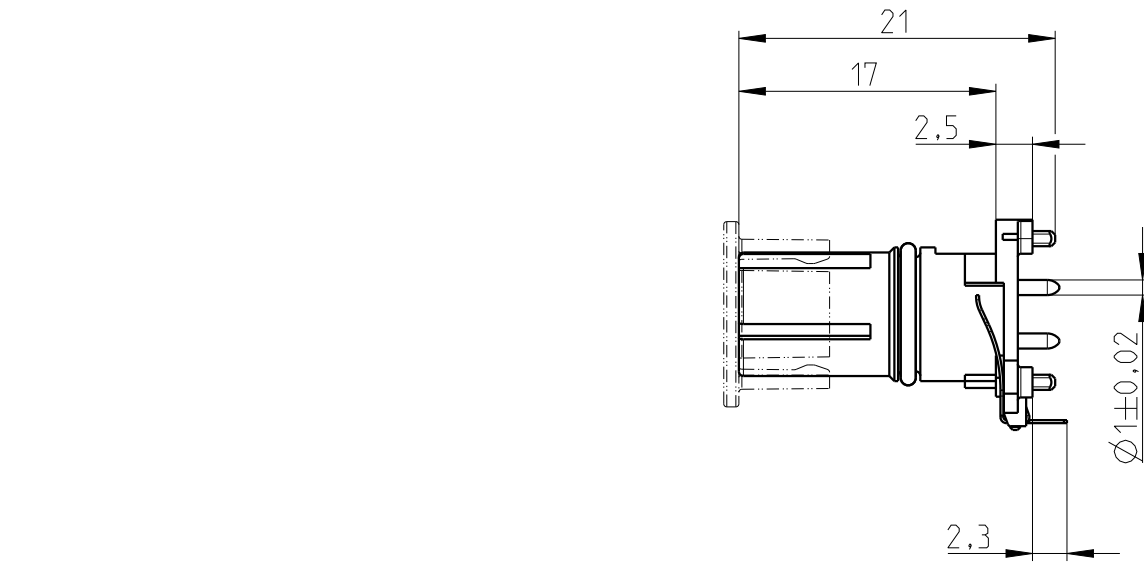

*The drawing represents connector with 5 positions. At reduced number of positions, the number of holes is reduced accordingly

Recommended solder paste thickness 150 µm

Typ	Pin [mm]	Hole Ø [mm]	Residual ring Ø [mm]	Template Ø [mm]
Contact	See brochure "Connectors for SMT production"			
Shielding Pin	0.8x0.2	1.1	2.1	2

 DIN A3



page 1 of 1

document-no. / ri 097100754 / 03	article-no.	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
date 15.07.25	document-type TECDOC 2D_Productdrawing		
description SACC-CI-M12FSD-4CON-SH TOR...			

- EN ISO 291 23/50