
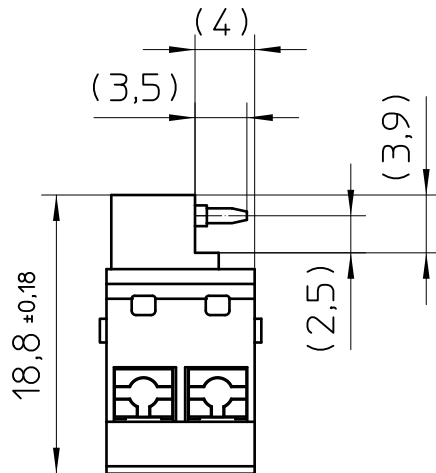
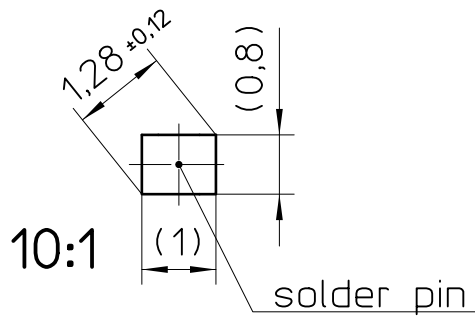
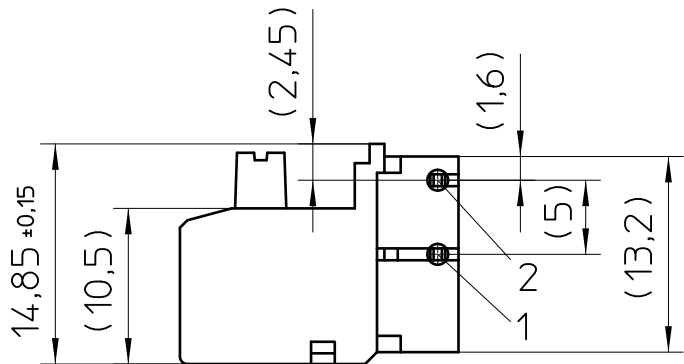
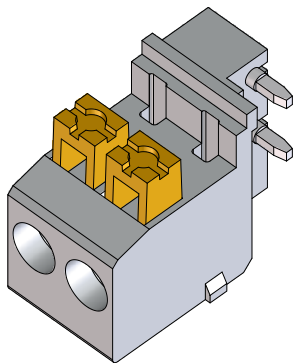


recommended PCB drilling plan
view: component side

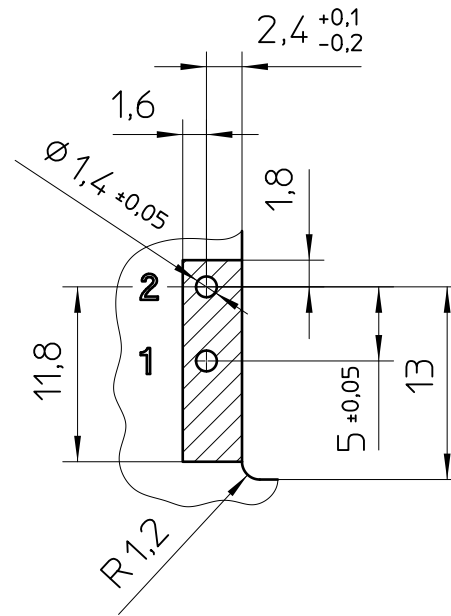

General tolerances:
dimensions ≤ 30: ±0,1/R±0,2/±1°
dimensions > 30: ±0,15/R±0,2/±1°
symmetry: 0,2

- General Information
- Simplified representation, exemplary shown in gray
 - Restricted area
 - Document excluded from change process
 - CAD Data see Download-Center on www.phoenixcontact.com
 - When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
 - Linear dimensions [mm]
 - Tolerances, apply in a normal climate according to DIN 50014-23/50-2, with about 2% (% by weight) moisture content.

 DIN A3		document-No. / RI 00836661 / 04		date 20.10.2025	scale 2:1
		ident.-No. 1064462	document-type TECDOC 2D_Productdrawing		
		description FKDSO 2,5/ 2-R GY LCBK			
page 1 of 1					