
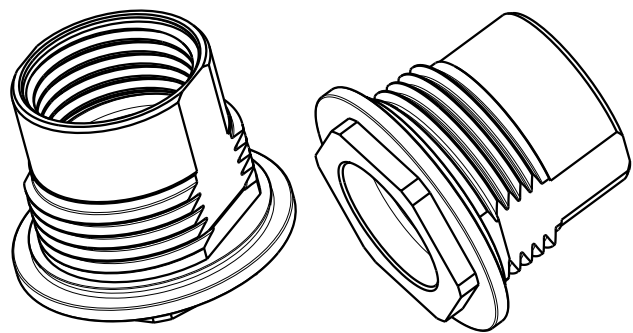
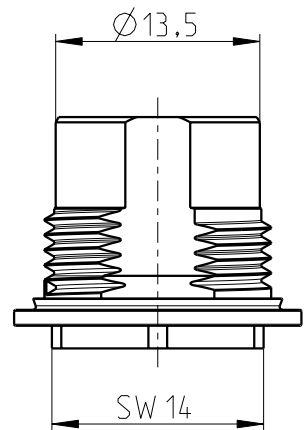


The copying, distribution and utilization of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem. §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen. PHOENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

Mechanical data (according to IEC 61076-2-101)	
Locking thread	M12x1 STANDARD
Material	
Flange housing	GD-Zn, nickel-plated
Sealing gasket	-
Nut	-
Temperature range	-40 °C to +85 °C

further information:
- see installation recommendation
SACC-BP-F-M12/M15-6-THR

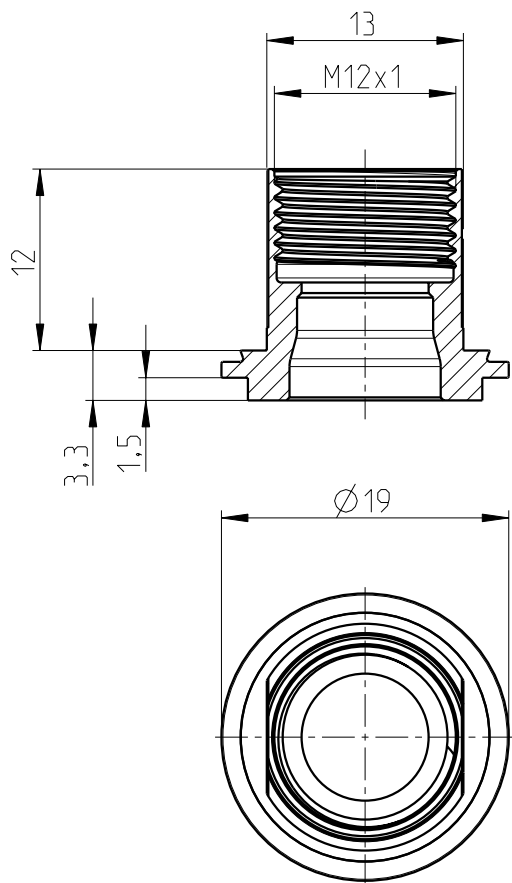

All specified data refers to the mounted M12 installation plugs ≥ IP54 and requires that the connector pair be correctly plugged and locked. Recommended tightening torque 0,4Nm. Influences from wires, cables or PCB mounting are also to be taken into consideration.

general tolerance acc. to DIN ISO 2768-c			technical changes reserved		Index 1 / 2018-10-16		scale: 2:1		
	date	name	Series DSIV M12 Standard housing screw connection female SW 14 / screw connection					page: 1 of: 1	
design	2018-03-27	Scheerer							
chk.									
			drawing-no.:	BS-0000000HA1B		doc.-no.:	01132511		
			order-no.:	1070297					
			article designation:	SACC-BP-F-M12/M15-6-THR W NO					