


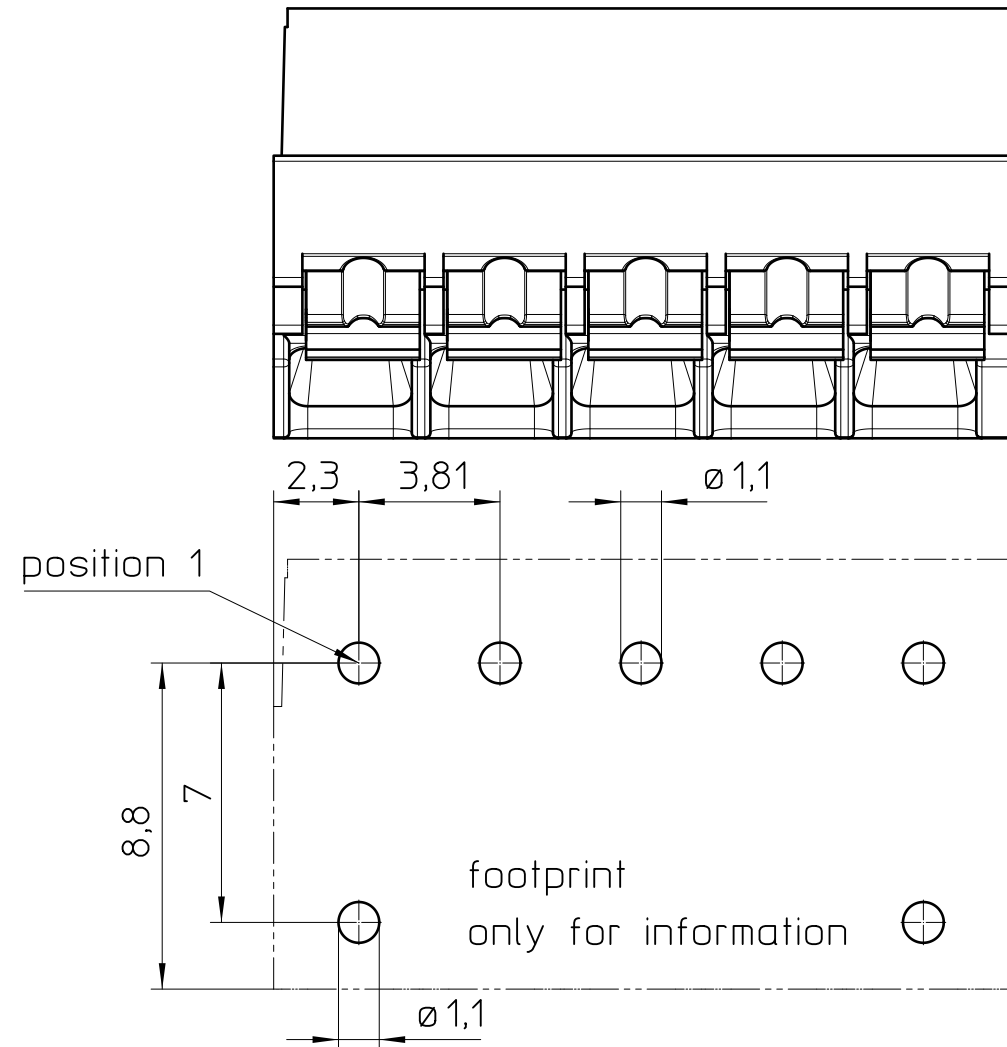
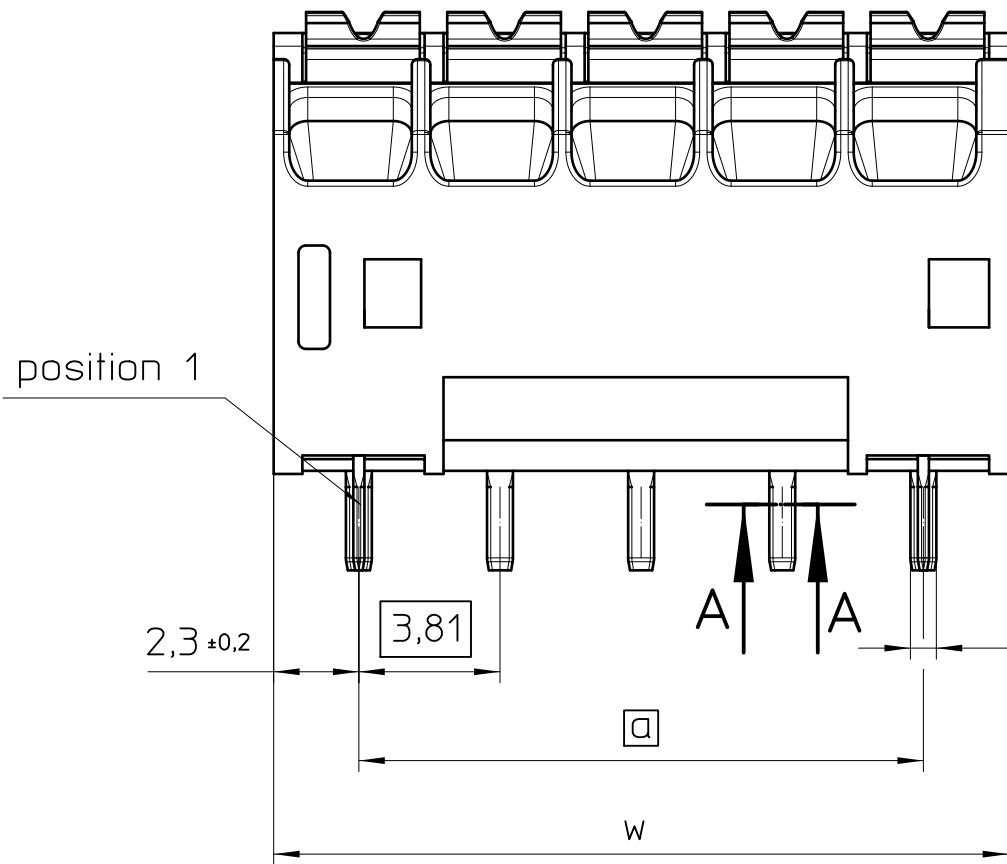


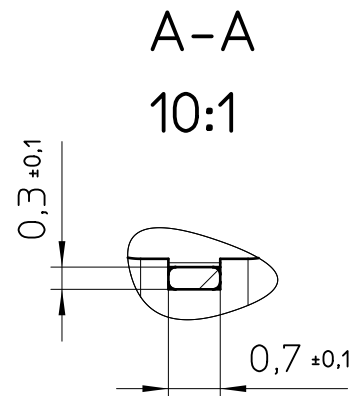

all pins
 $\Phi \text{ } \varnothing 0,4 \text{ A}$

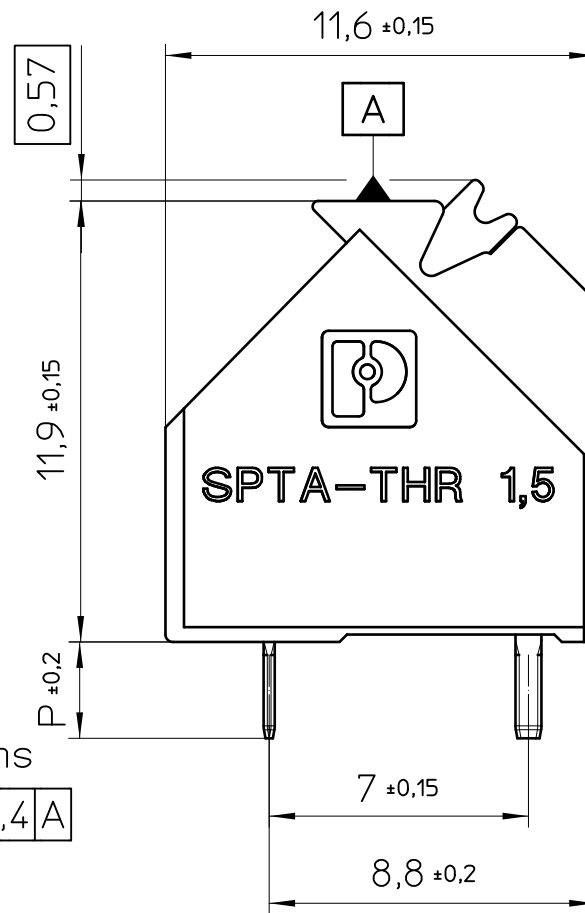

2-pole variant

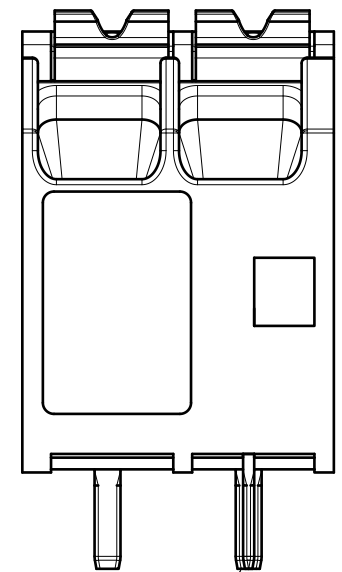

anchor pin only on
the right side

pos.	dim. a	dim. w
2	3,81	8,41 ±0,15
3	7,62	12,22 ±0,15
4	11,43	16,03 ±0,15
5	15,24	19,84 ±0,20
6	19,05	23,65 ±0,20
7	22,86	27,46 ±0,20
8	26,67	31,27 ±0,20
9	30,48	35,08 ±0,20
10	34,29	38,89 ±0,20
11	38,10	42,70 ±0,20
12	41,91	46,51 ±0,20

- EN ISO 291 23/50

 DIN A3		document-no. / ri 01173106 / 01	date 08.05.2025	scale 5:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		document-type TECDC 2D_Productfamily			
page 1 of 1		description SPTA-THR 1,5/..-3,81			