

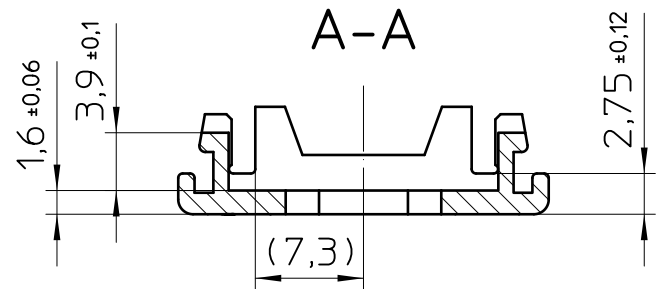
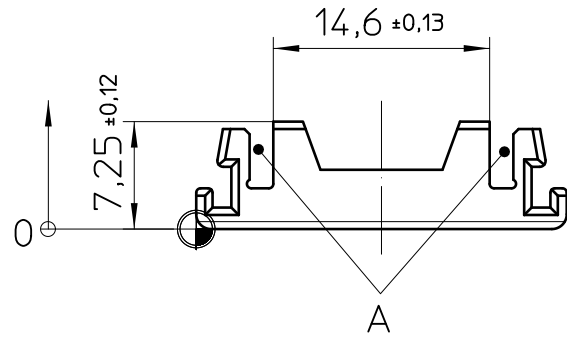
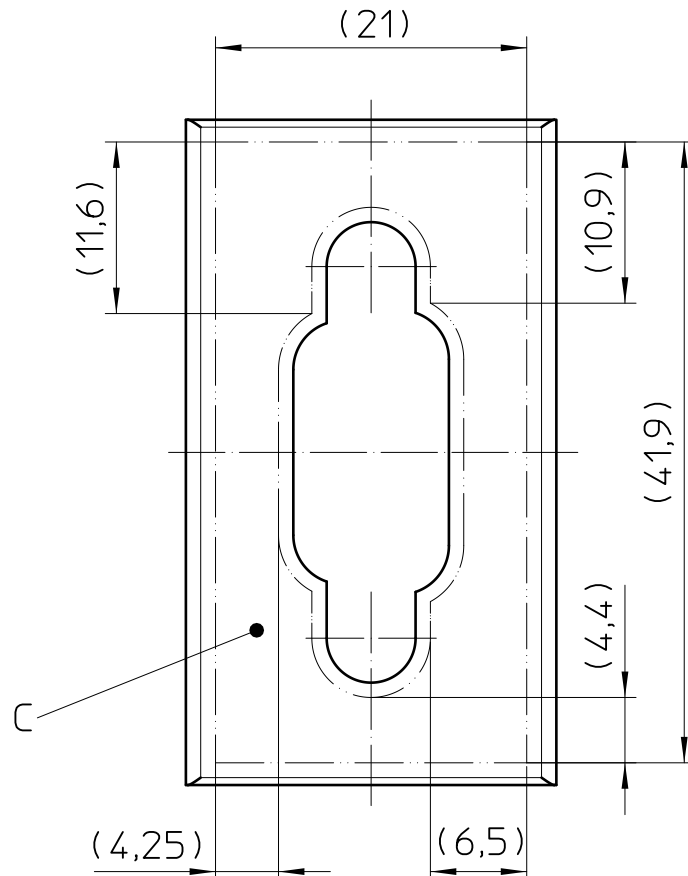
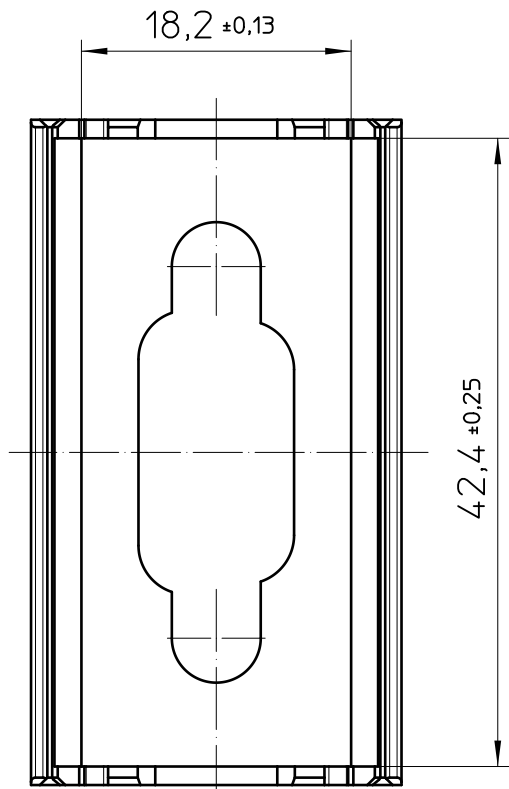
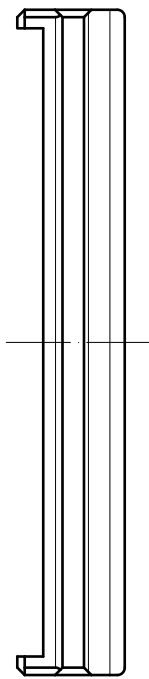
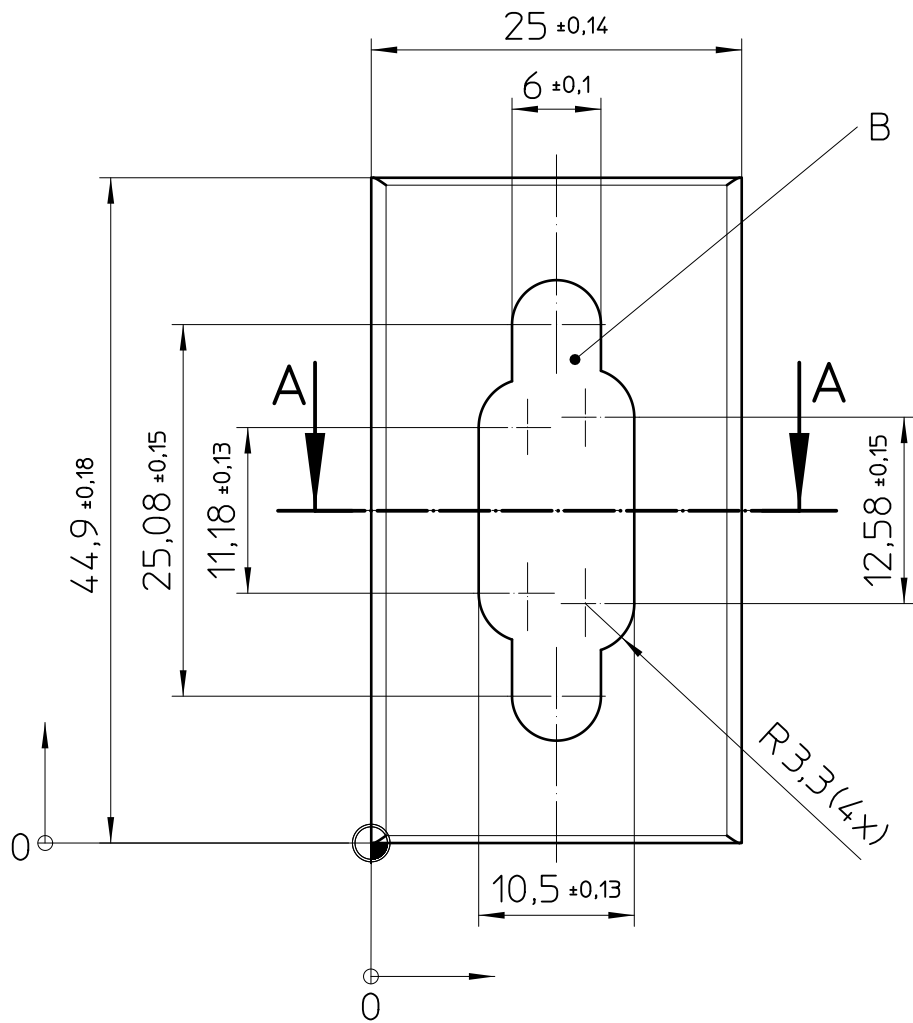




FILLER

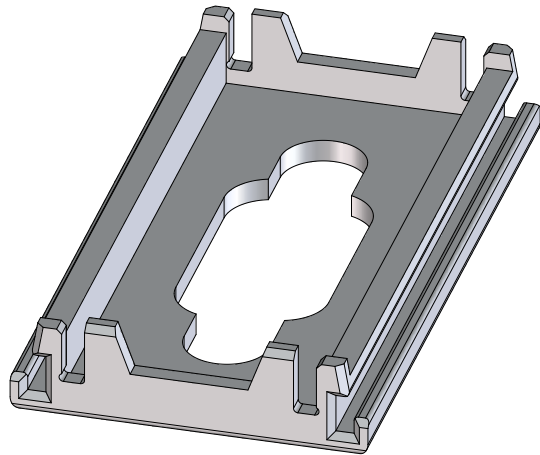

depth
width
height

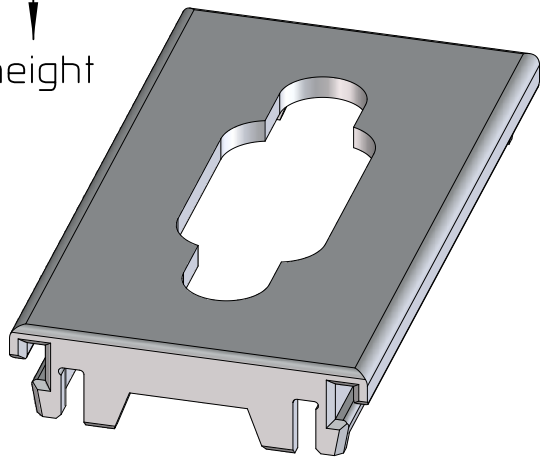

Assembly example

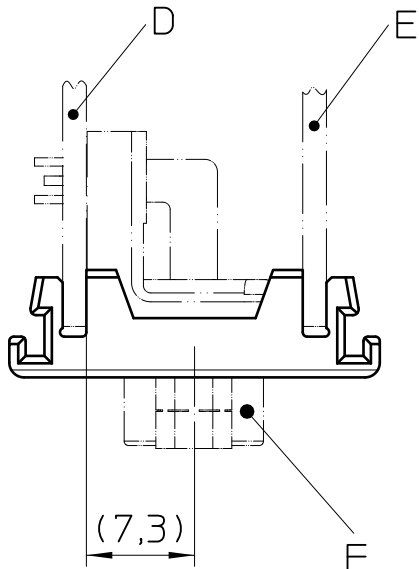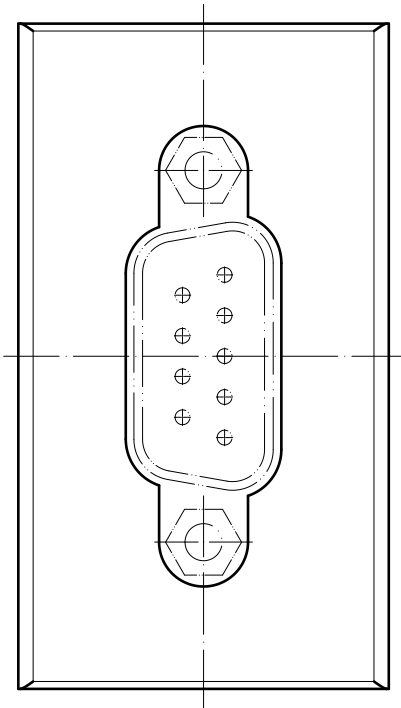

- General Information:
- Simplified representation, exemplary shown in gray
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for printing processing
 - Tolerances for printing DIN ISO 2768-m
 - Web: www.phoenixcontact.com webcode: #1635

- Additional Information:
- A. PCB guidance
 - B. Opening for connectors D-SUB 9
 - C. Marking area for pad printing, other printing process on request
 - D. Main PCB, thickness= 1,6±0,2
 - E. Second PCB, thickness= 1,6±0,2
 - F. Connector D-SUB 9

Pos.	QTY	Description	Material
1	1	FILLER	PA
DIN A2		document-No. / RI 01119618 / 02	date 08.04.2025
		ident.-No. 1071639	document-type TECDOC 2D_Productdrawing
page 1 of 1		description ICS25-F45D9-5015	
		scale 2:1	