




ICS25-F22S

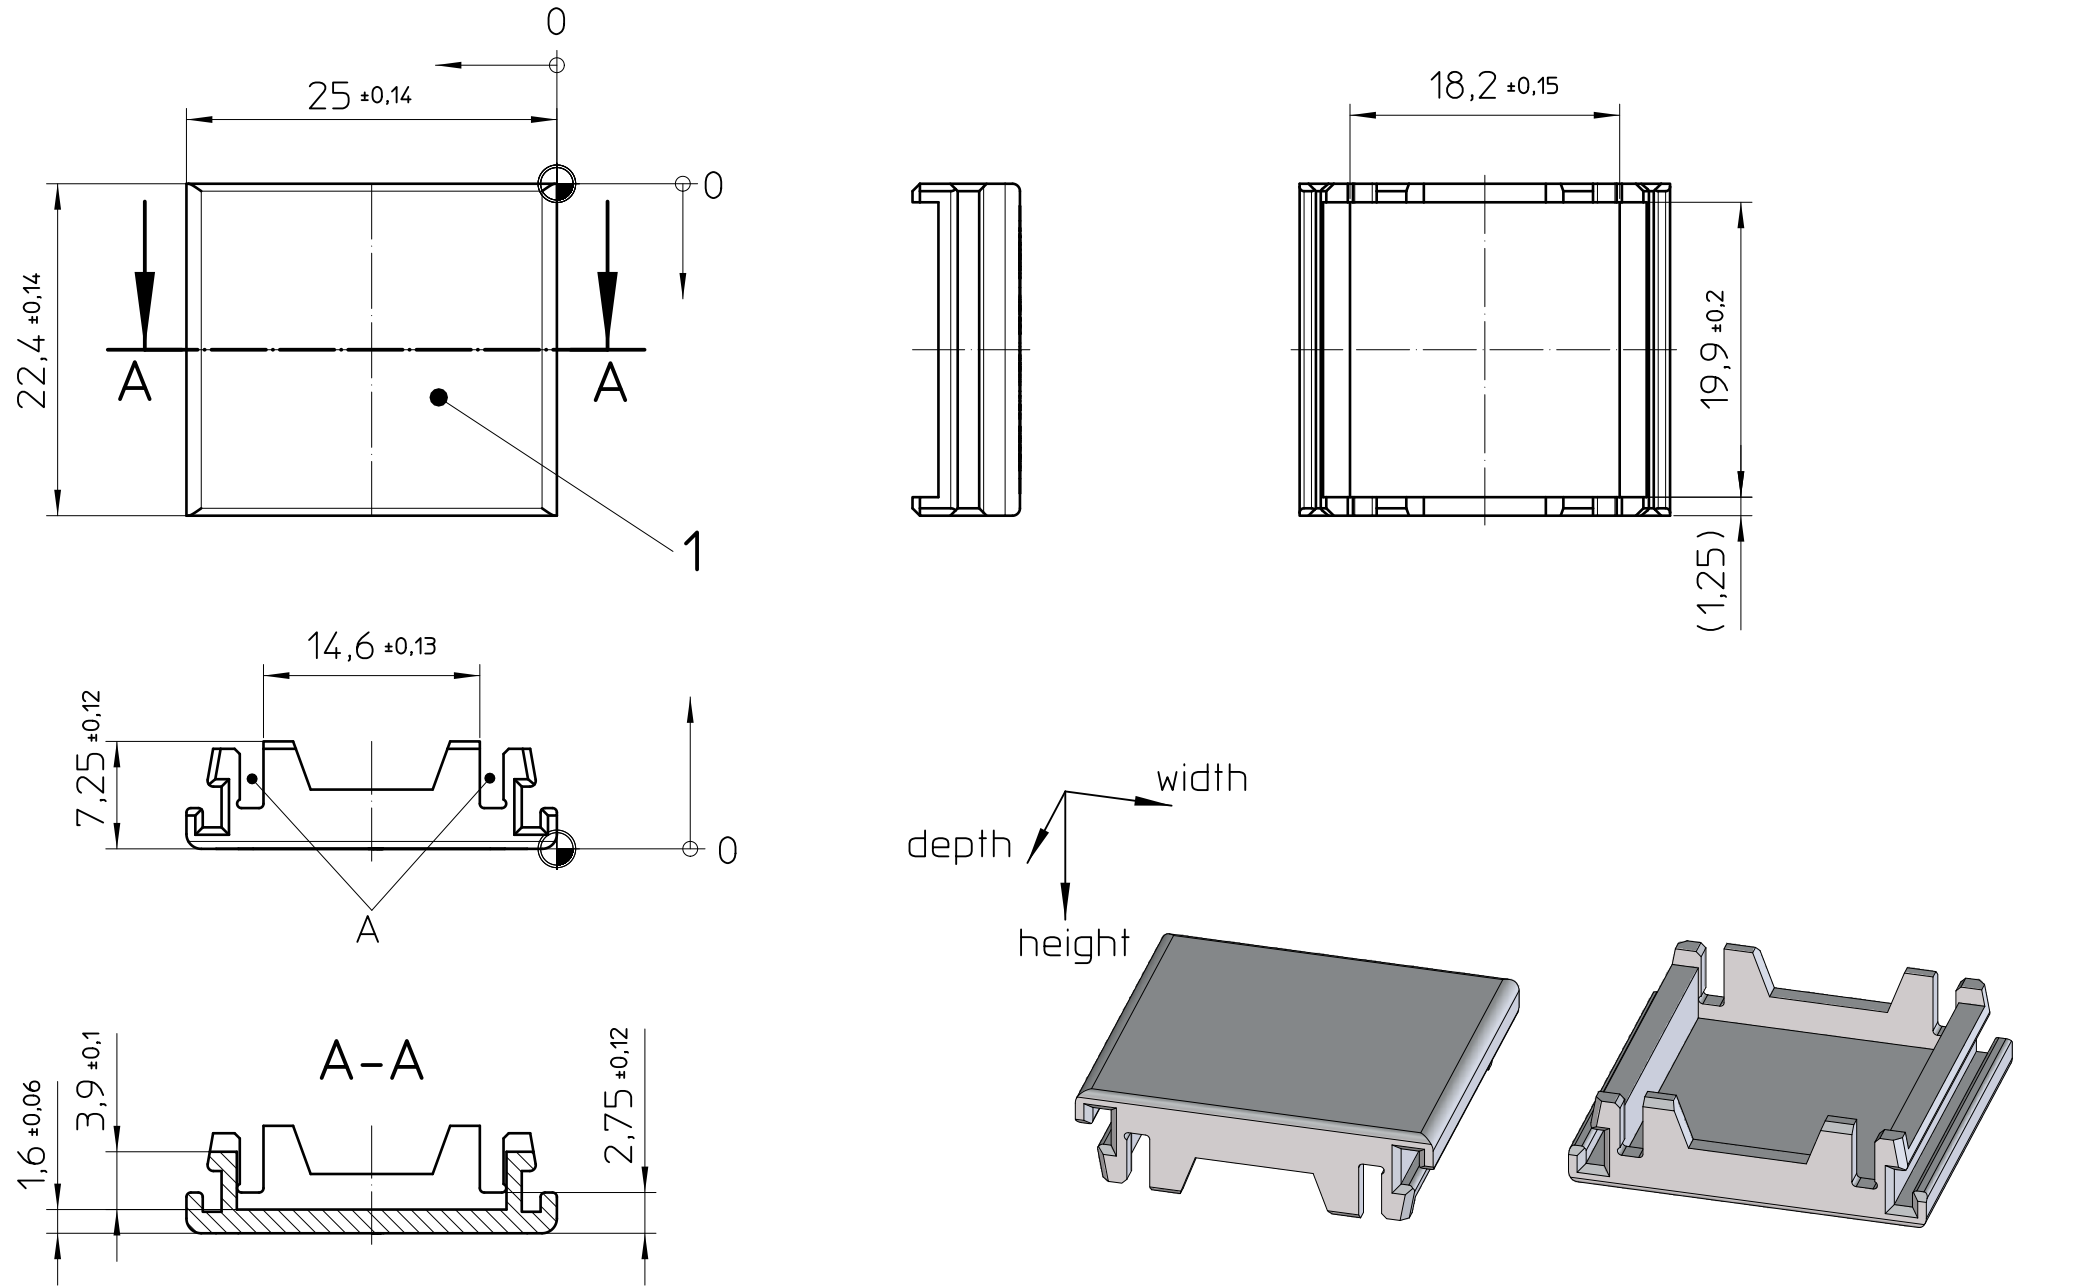


ICS25-F45S

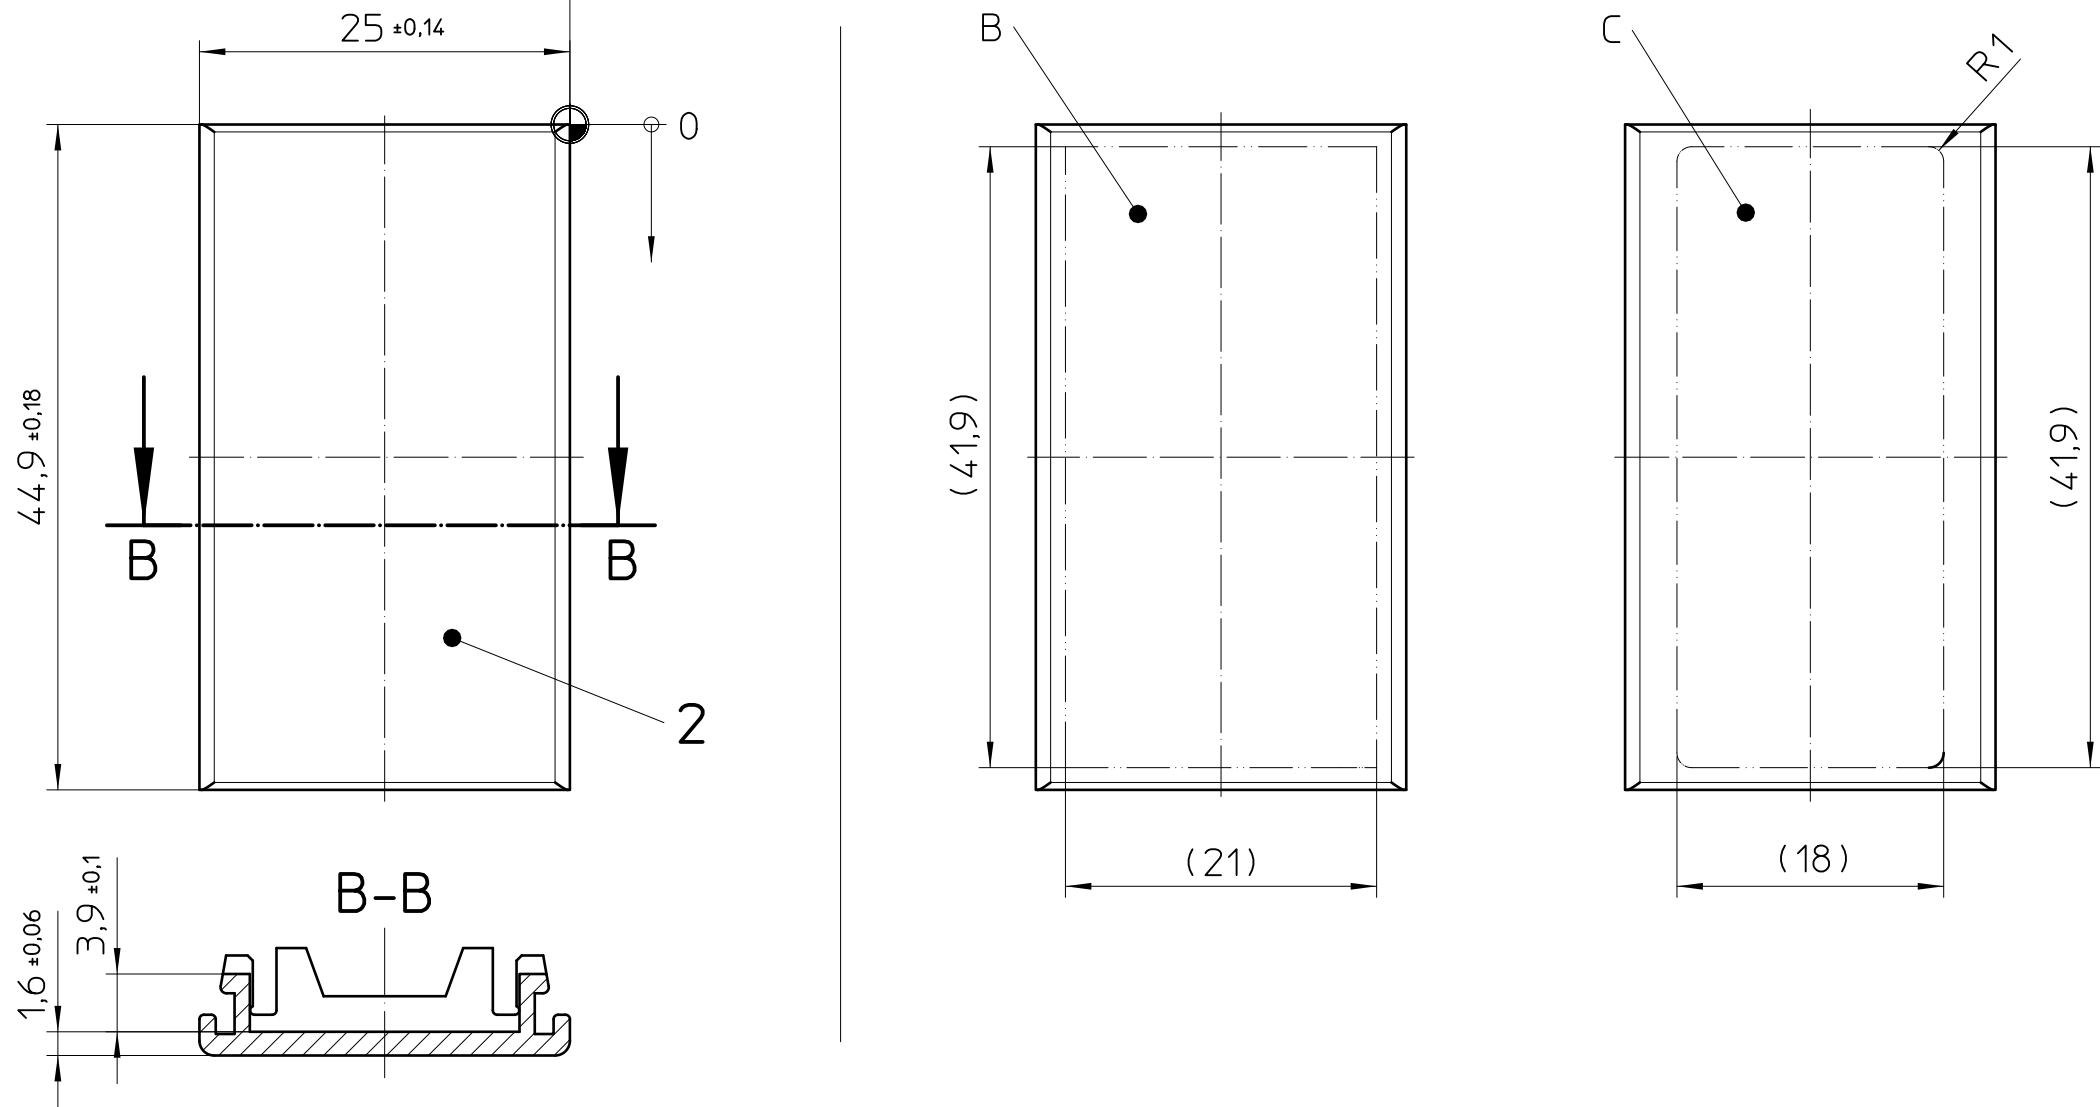


ICS25-F67S

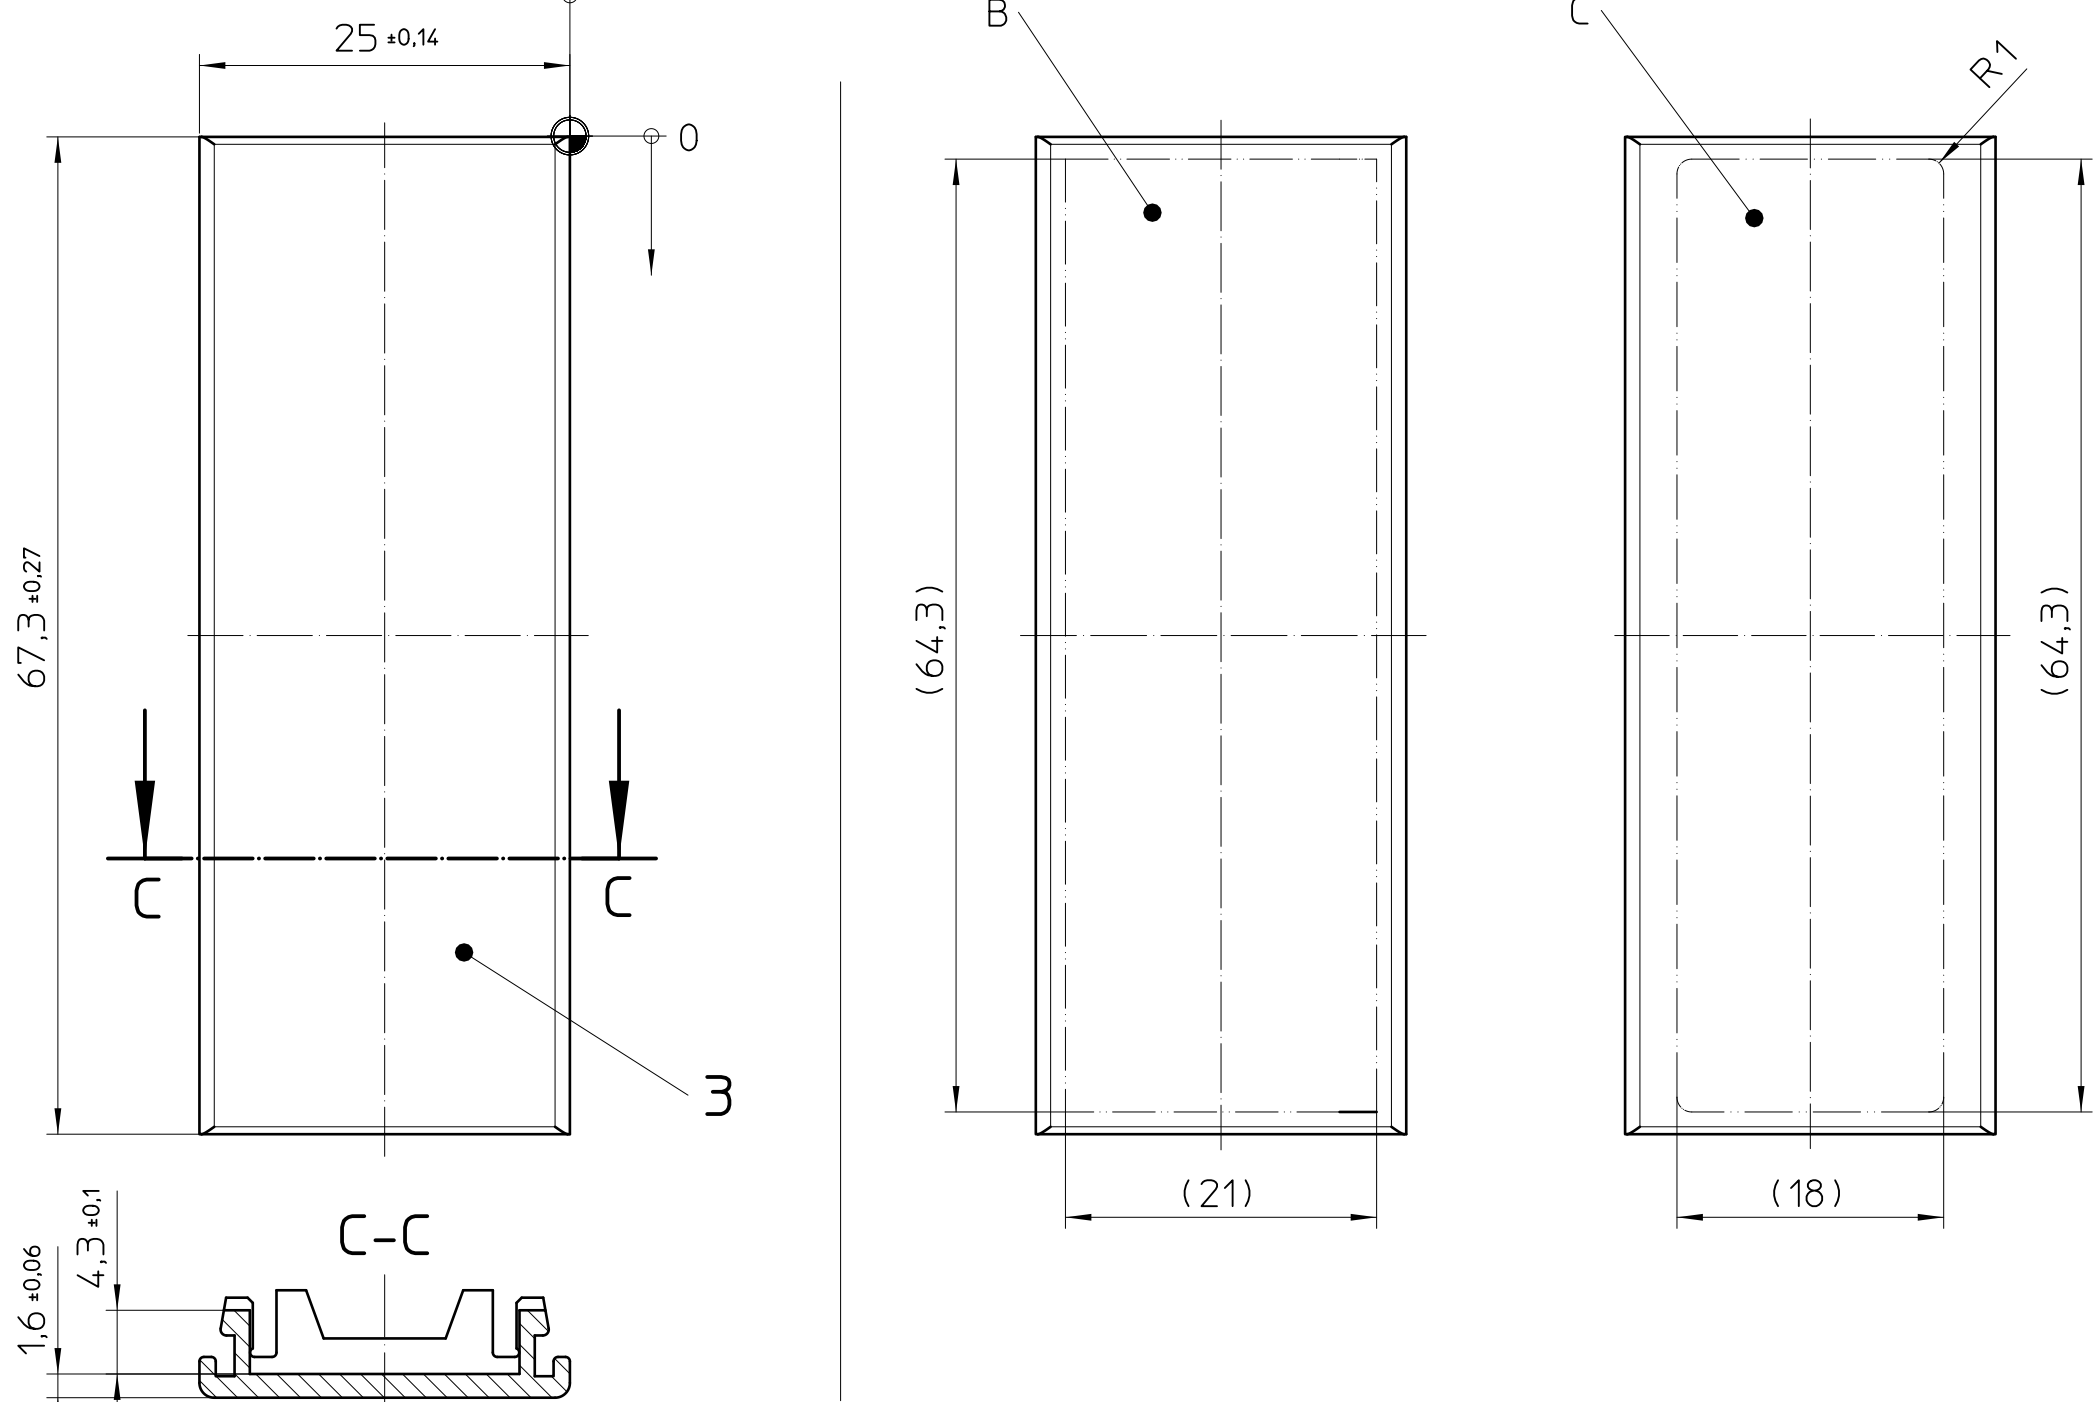


ICS25-F90S

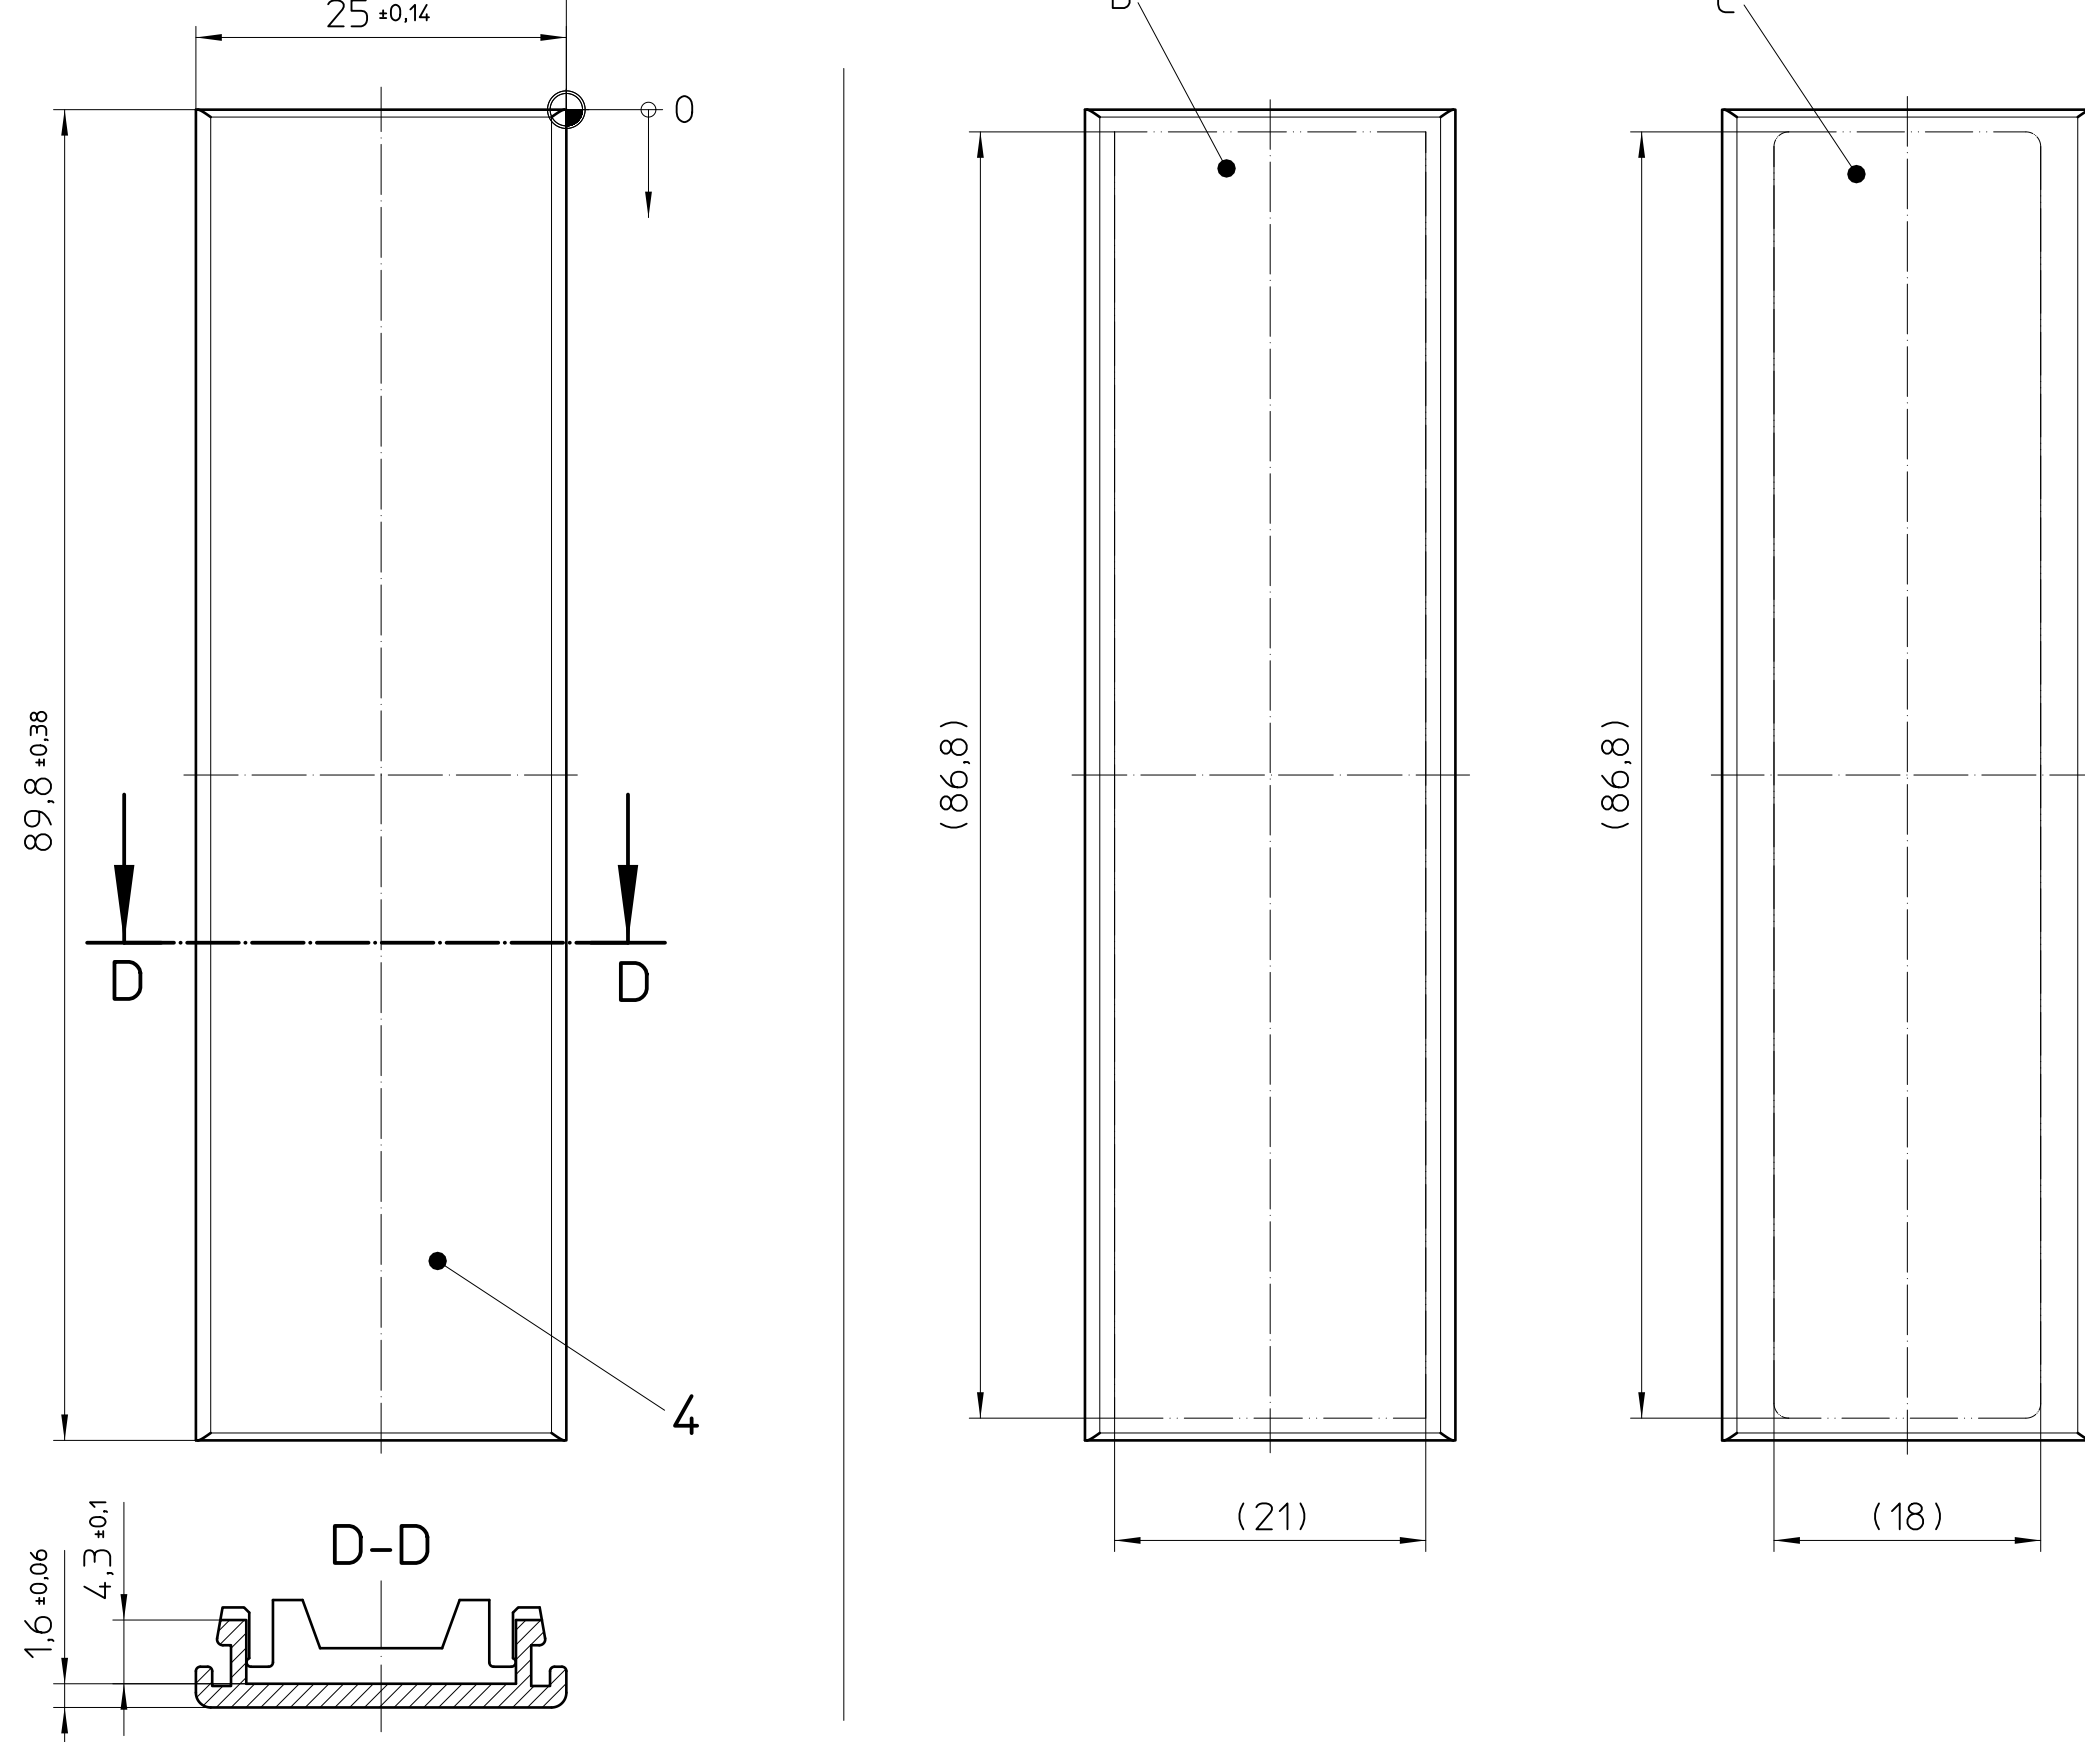

ICS25-F112S

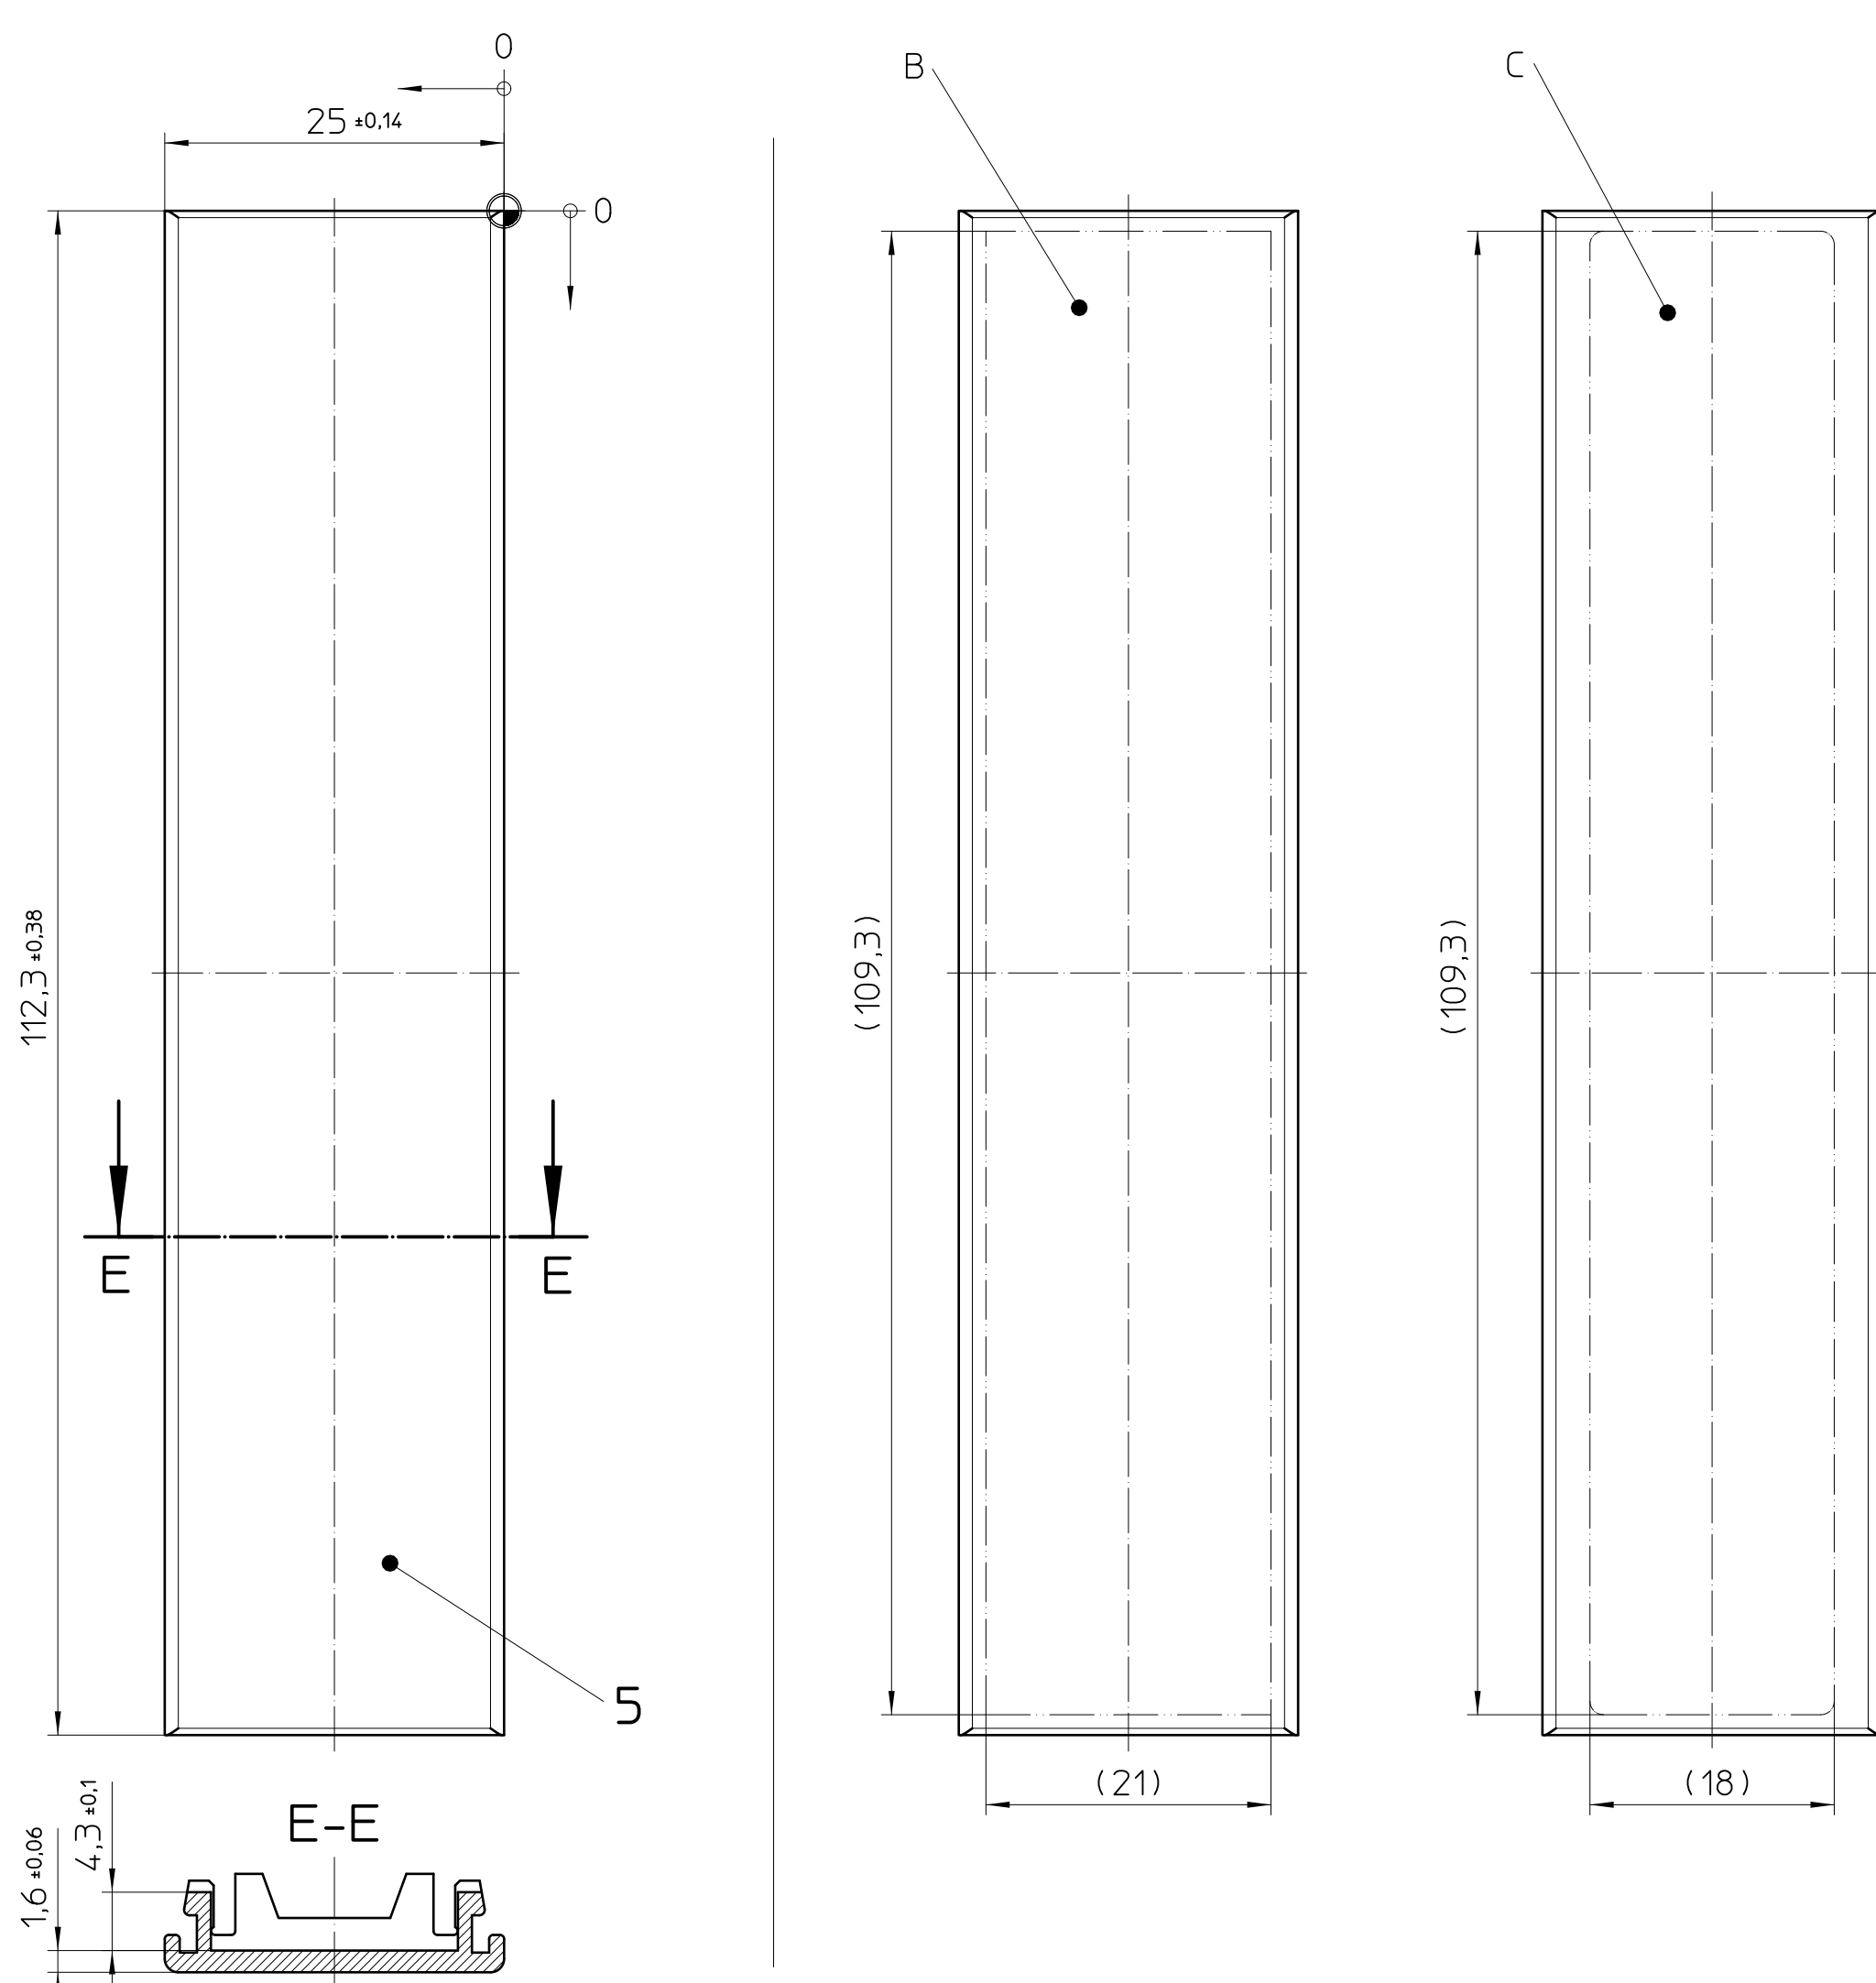

Assembly example

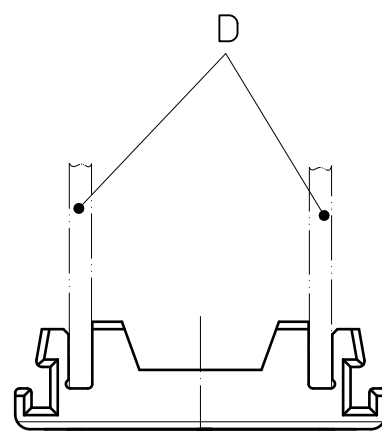

- General Information:
- Simplified representation
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2.
 - PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing
 - milling contour to zero point ±0.2
 - milling to milling contour ±0.1
 - Machining radii min. R1, further on request
 - Tolerances for printing DIN ISO 2768-m
 - Web: www.phoenixcontact.com webcode: #1635
- Additional Information:
- A) PCB guidance
 - B) Marking area only for pad printing, other printing processes on request
 - C) Machining area
 - D) PCB, thickness=1.6 ±0.2

Pos.	QTY	description	material
1	1	ICS25-F22S	PA
2	1	ICS25-F45S	PA
3	1	ICS25-F67S	PA
4	1	ICS25-F90S	PA
5	1	ICS25-F112S	PA

	DIN A1	document-No. / Ri 01072806 / 03	date 08.04.2025	scale 2:1
	ident.-No. 1071794	document-type TECD0C_2D_Productdrawing		
page 1	of 1	description ICS25-F22S-5015		