
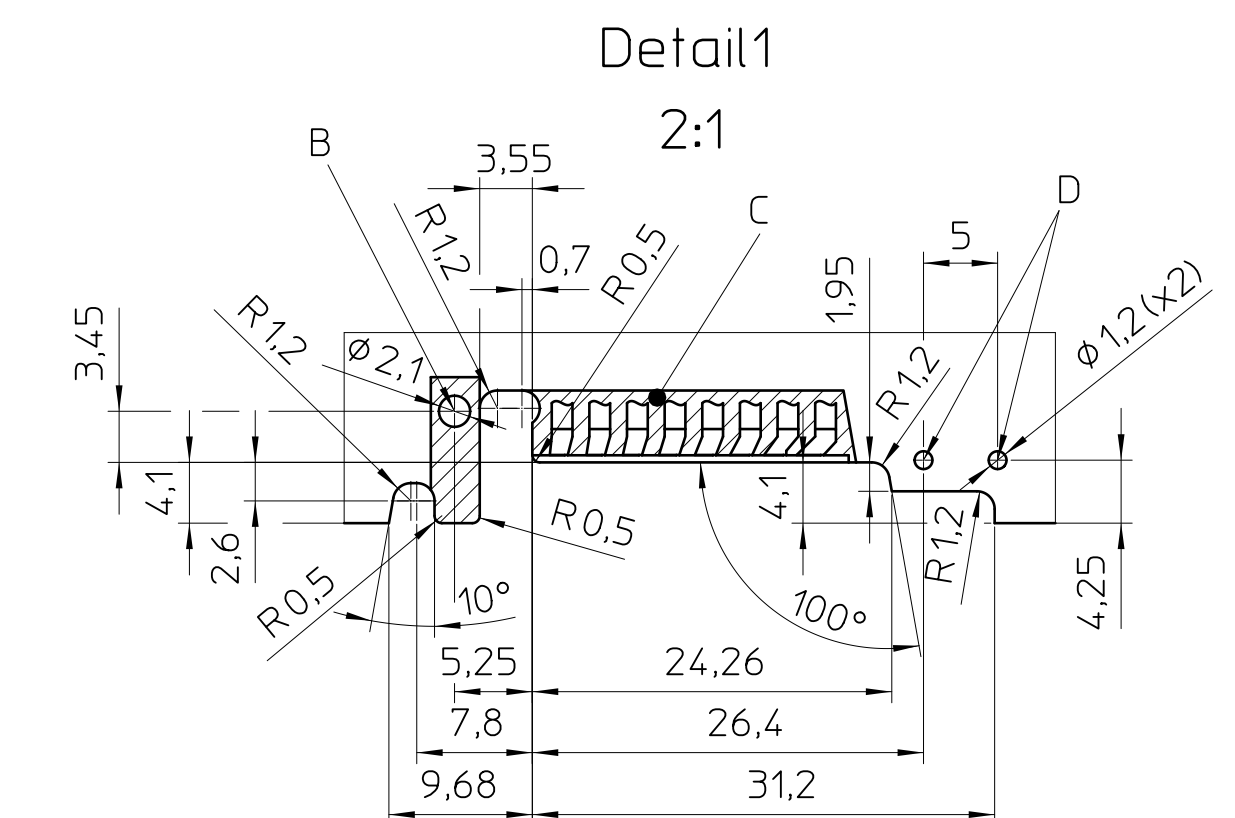
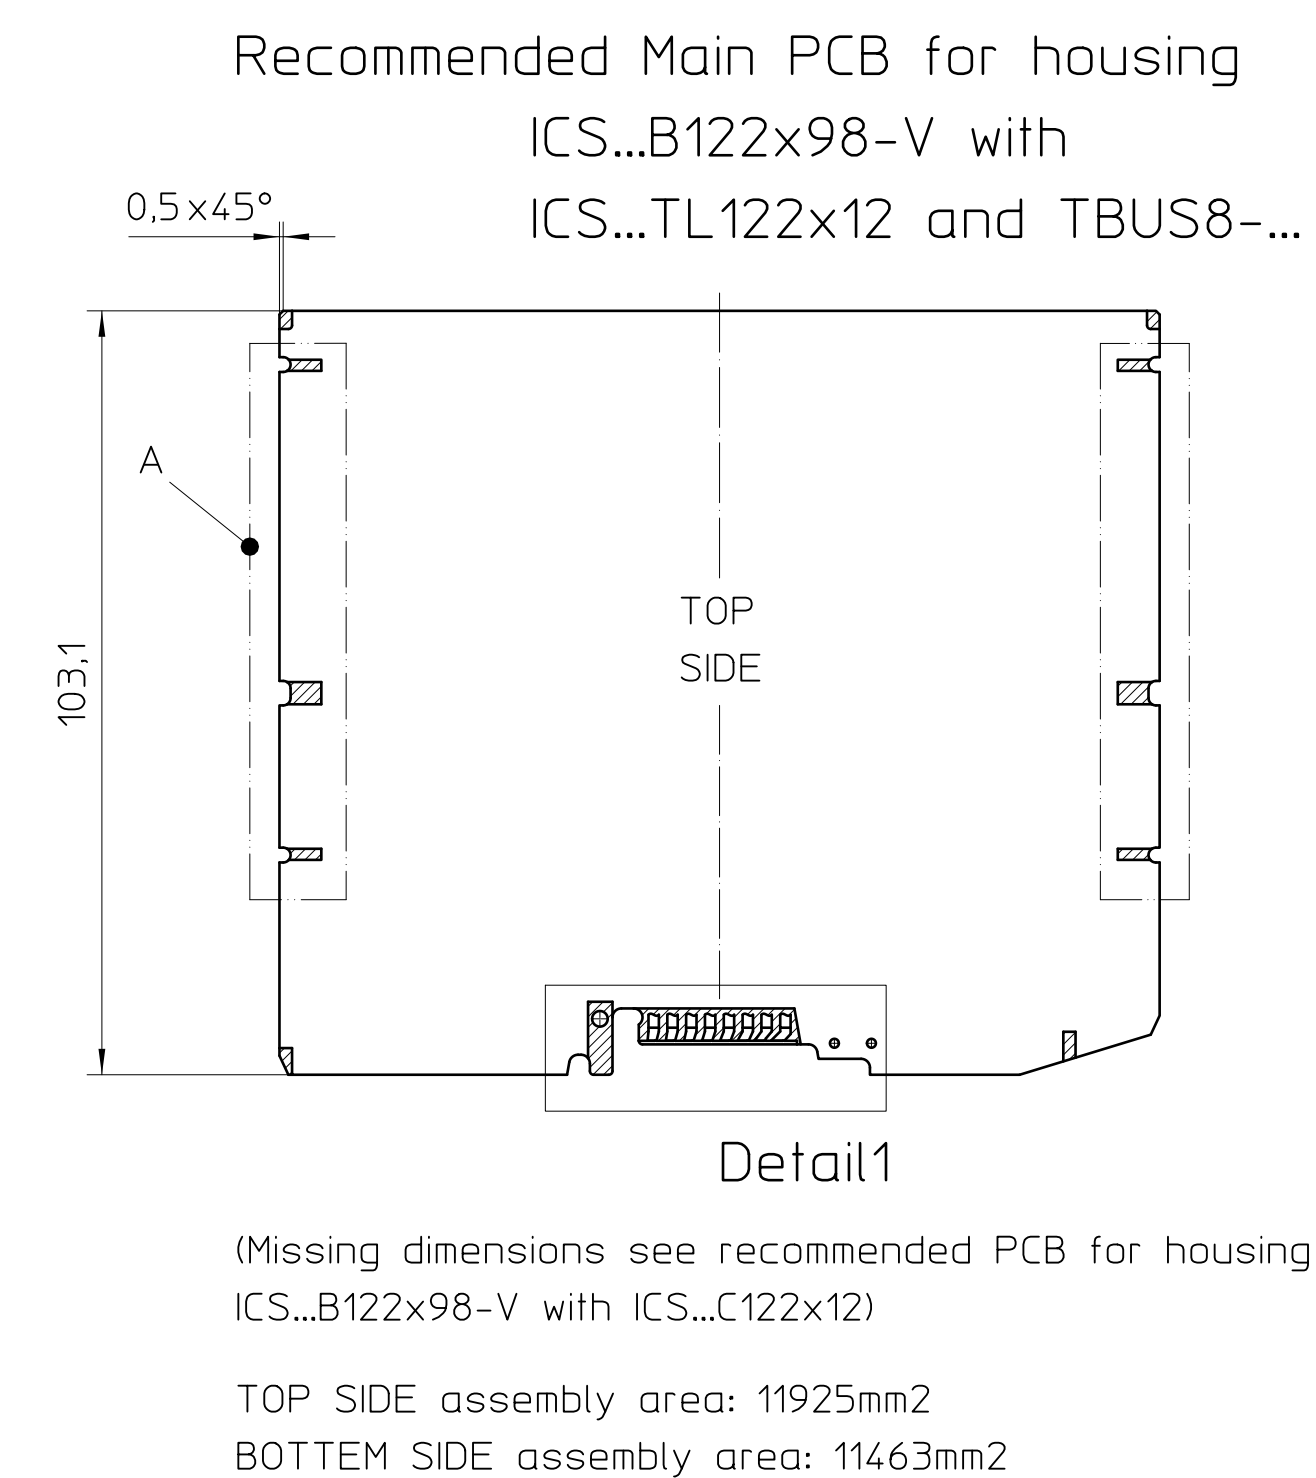
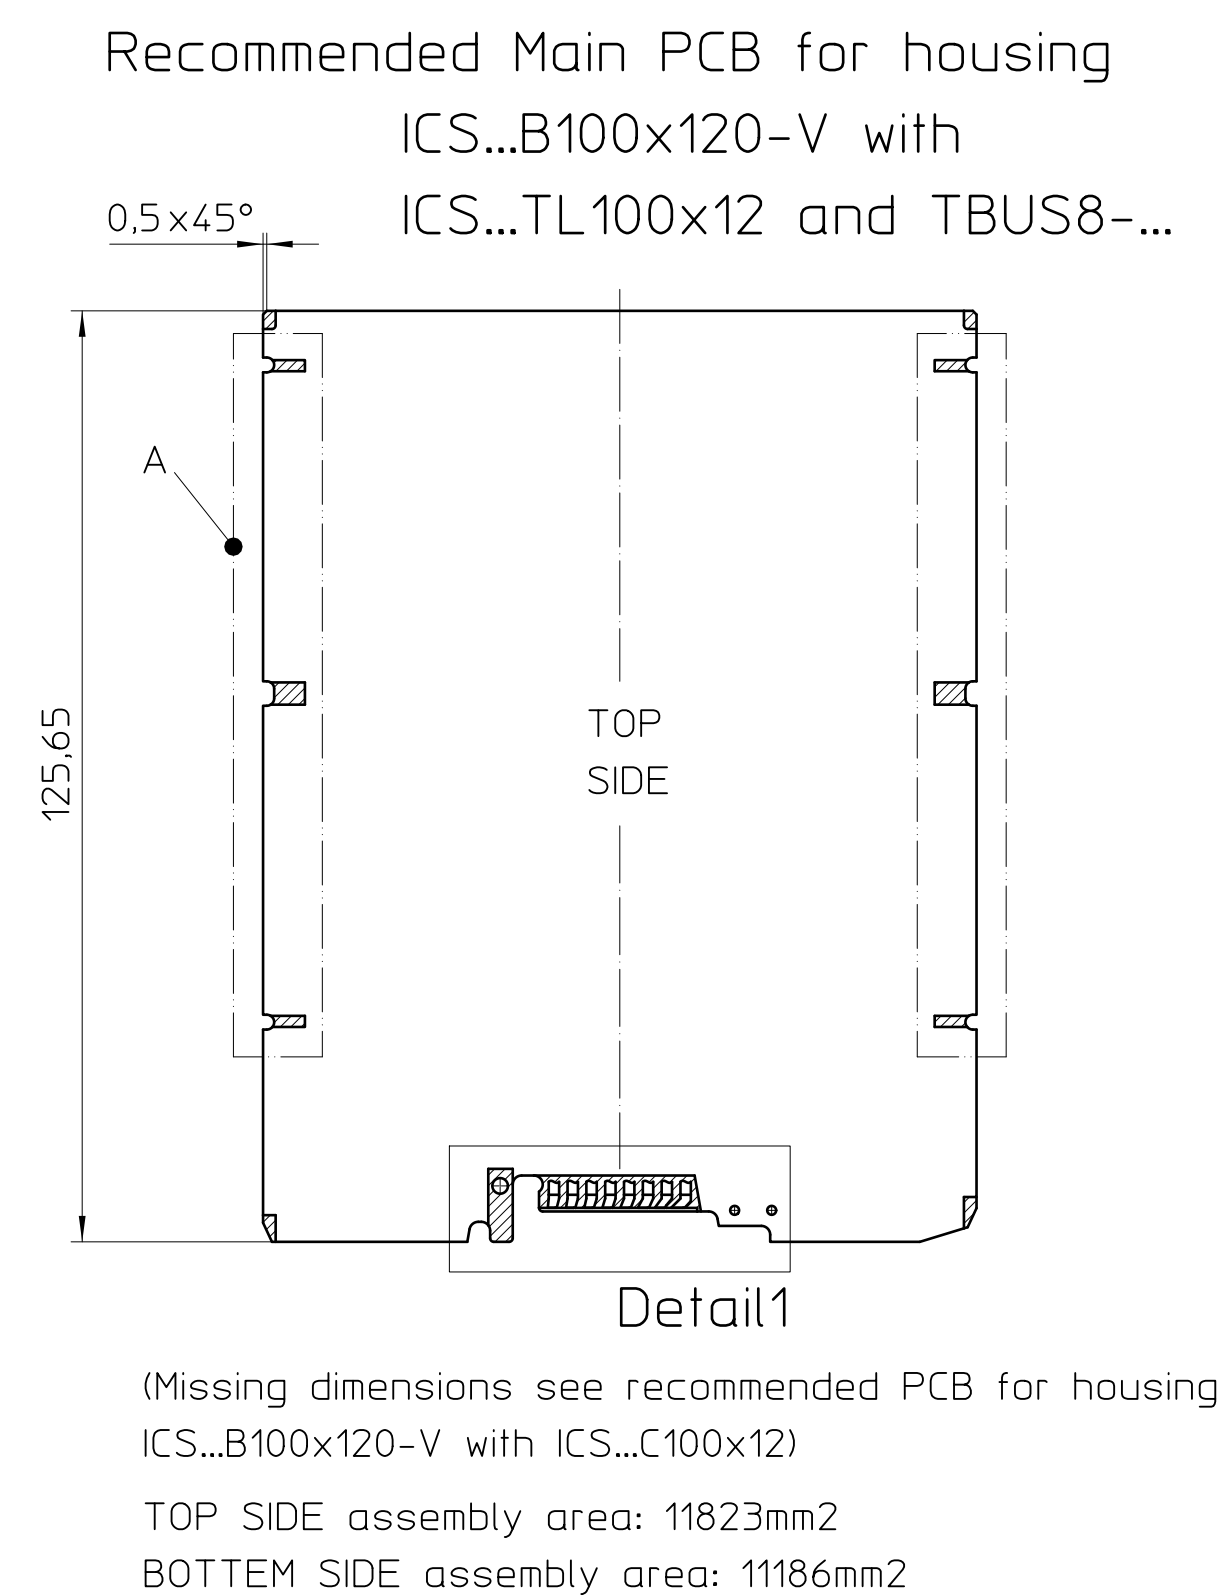
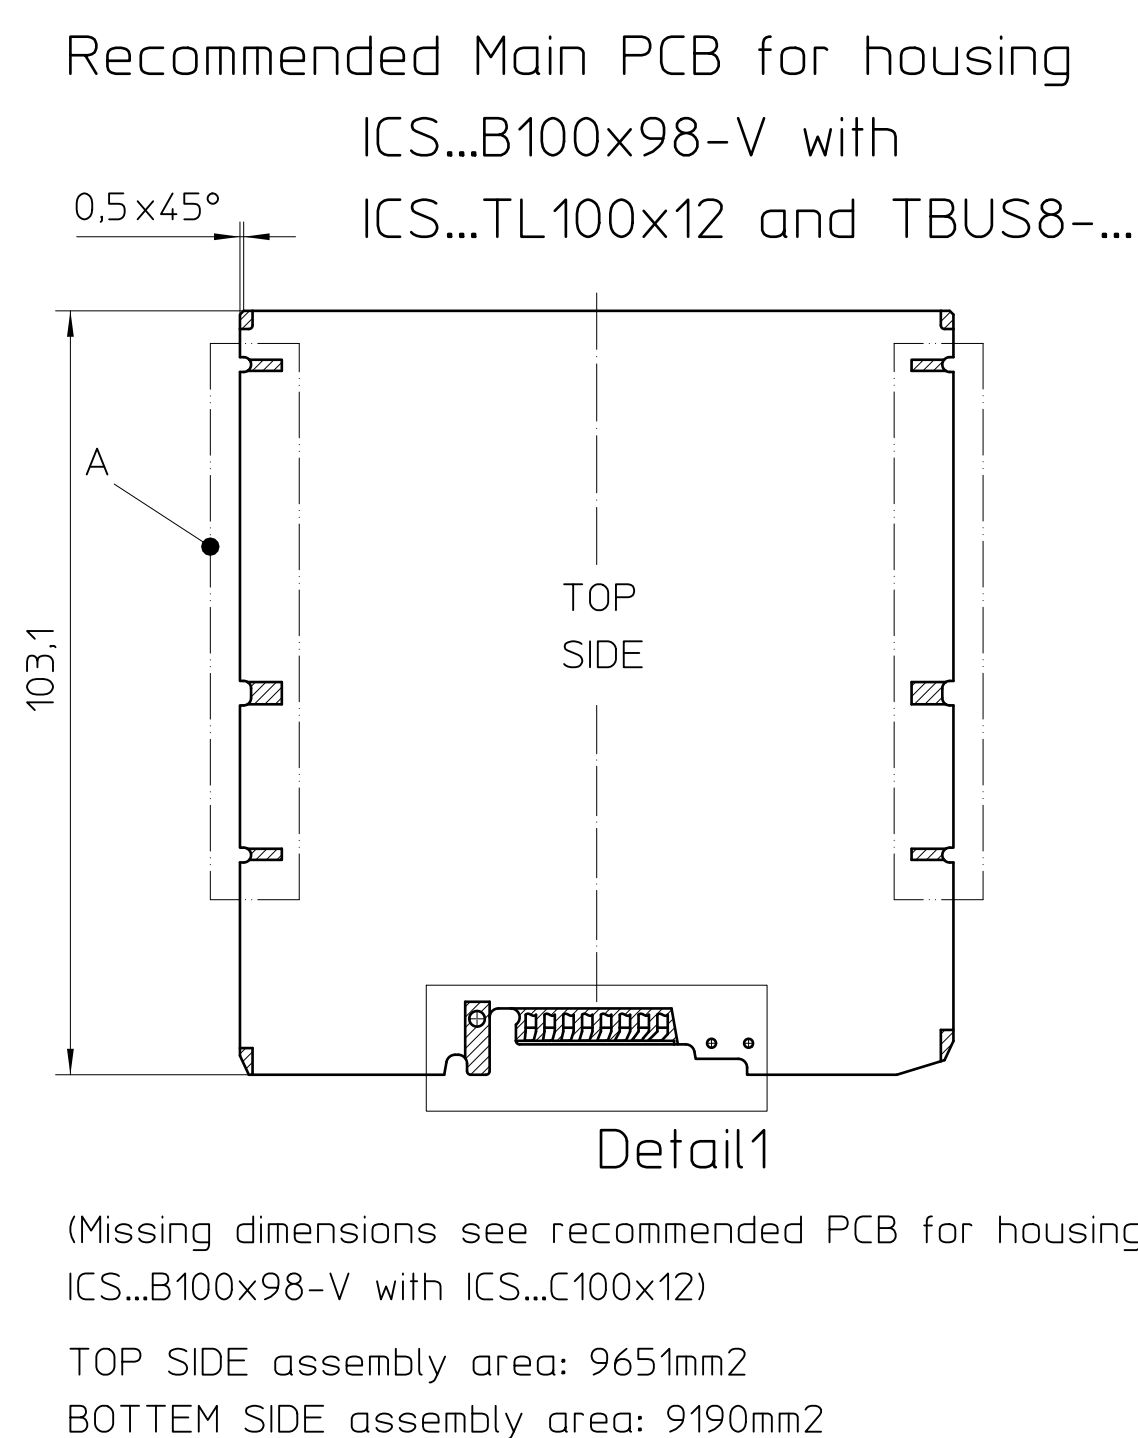
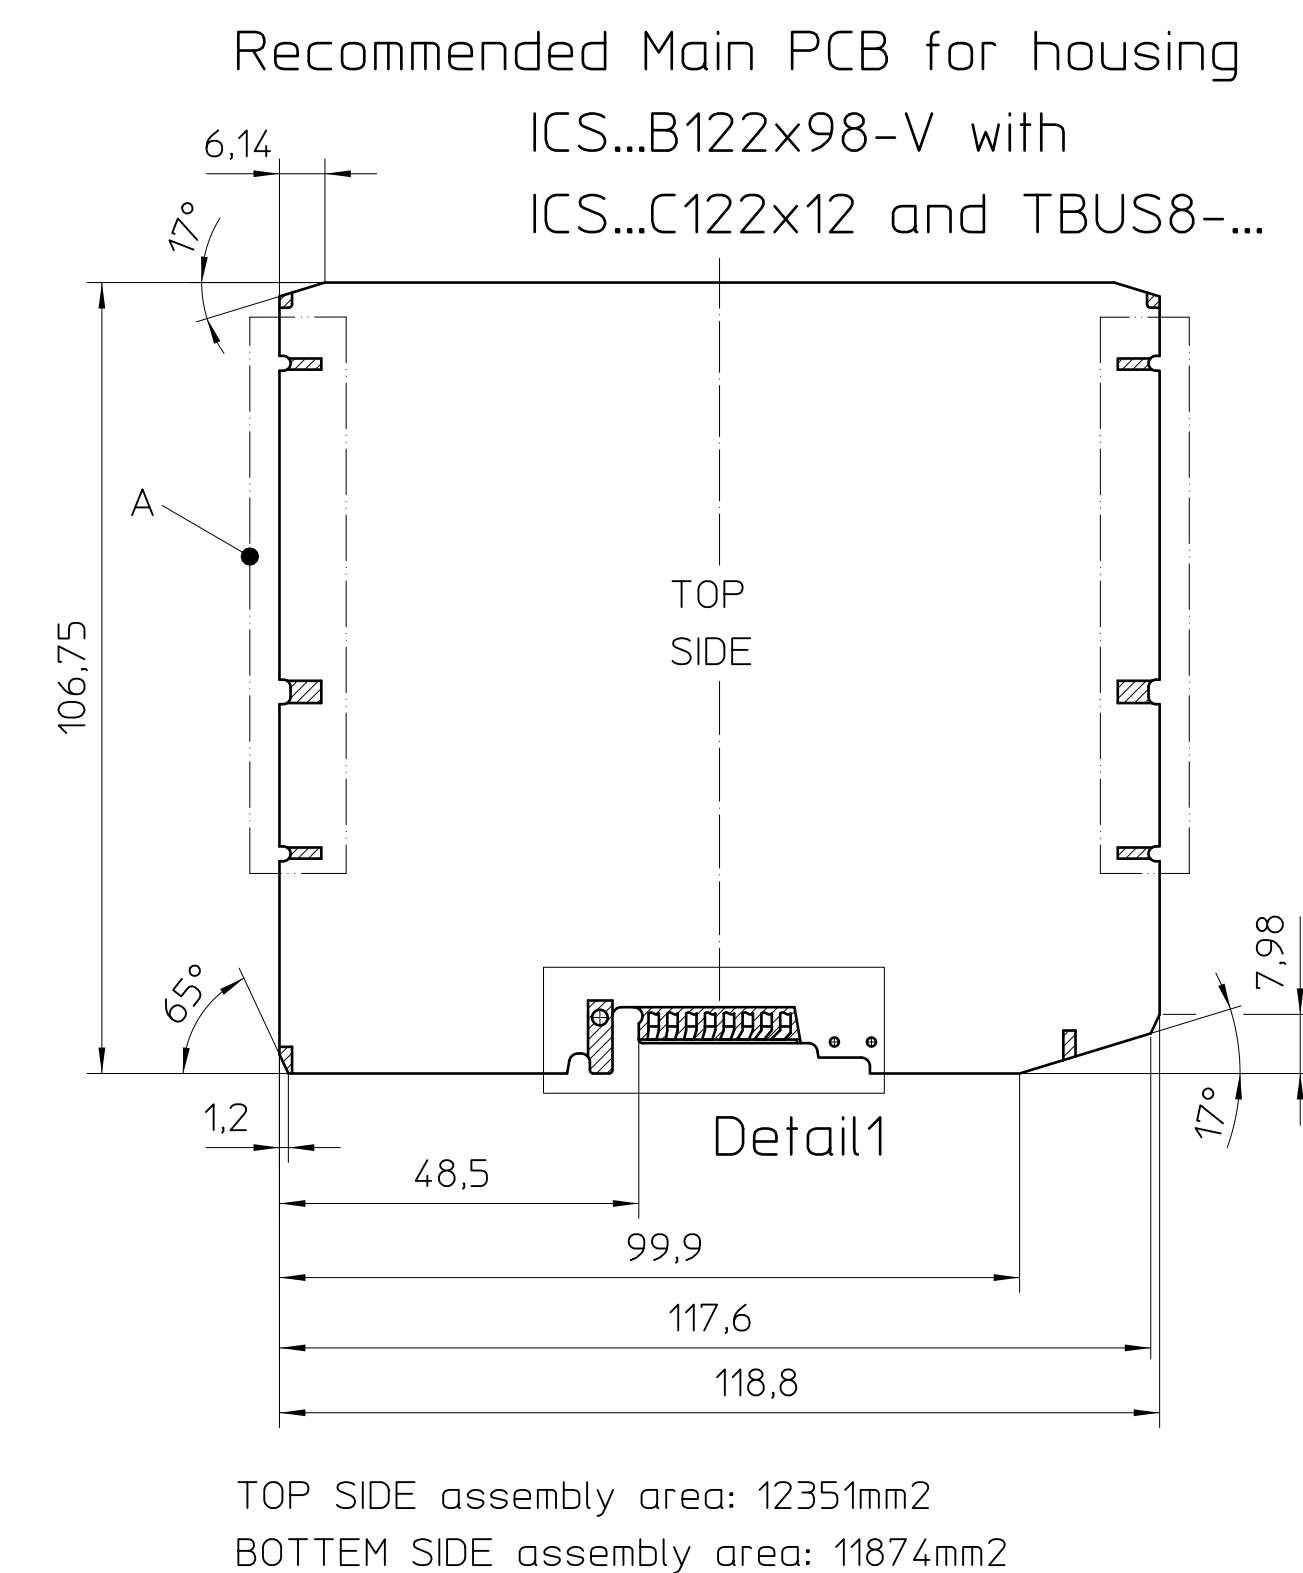
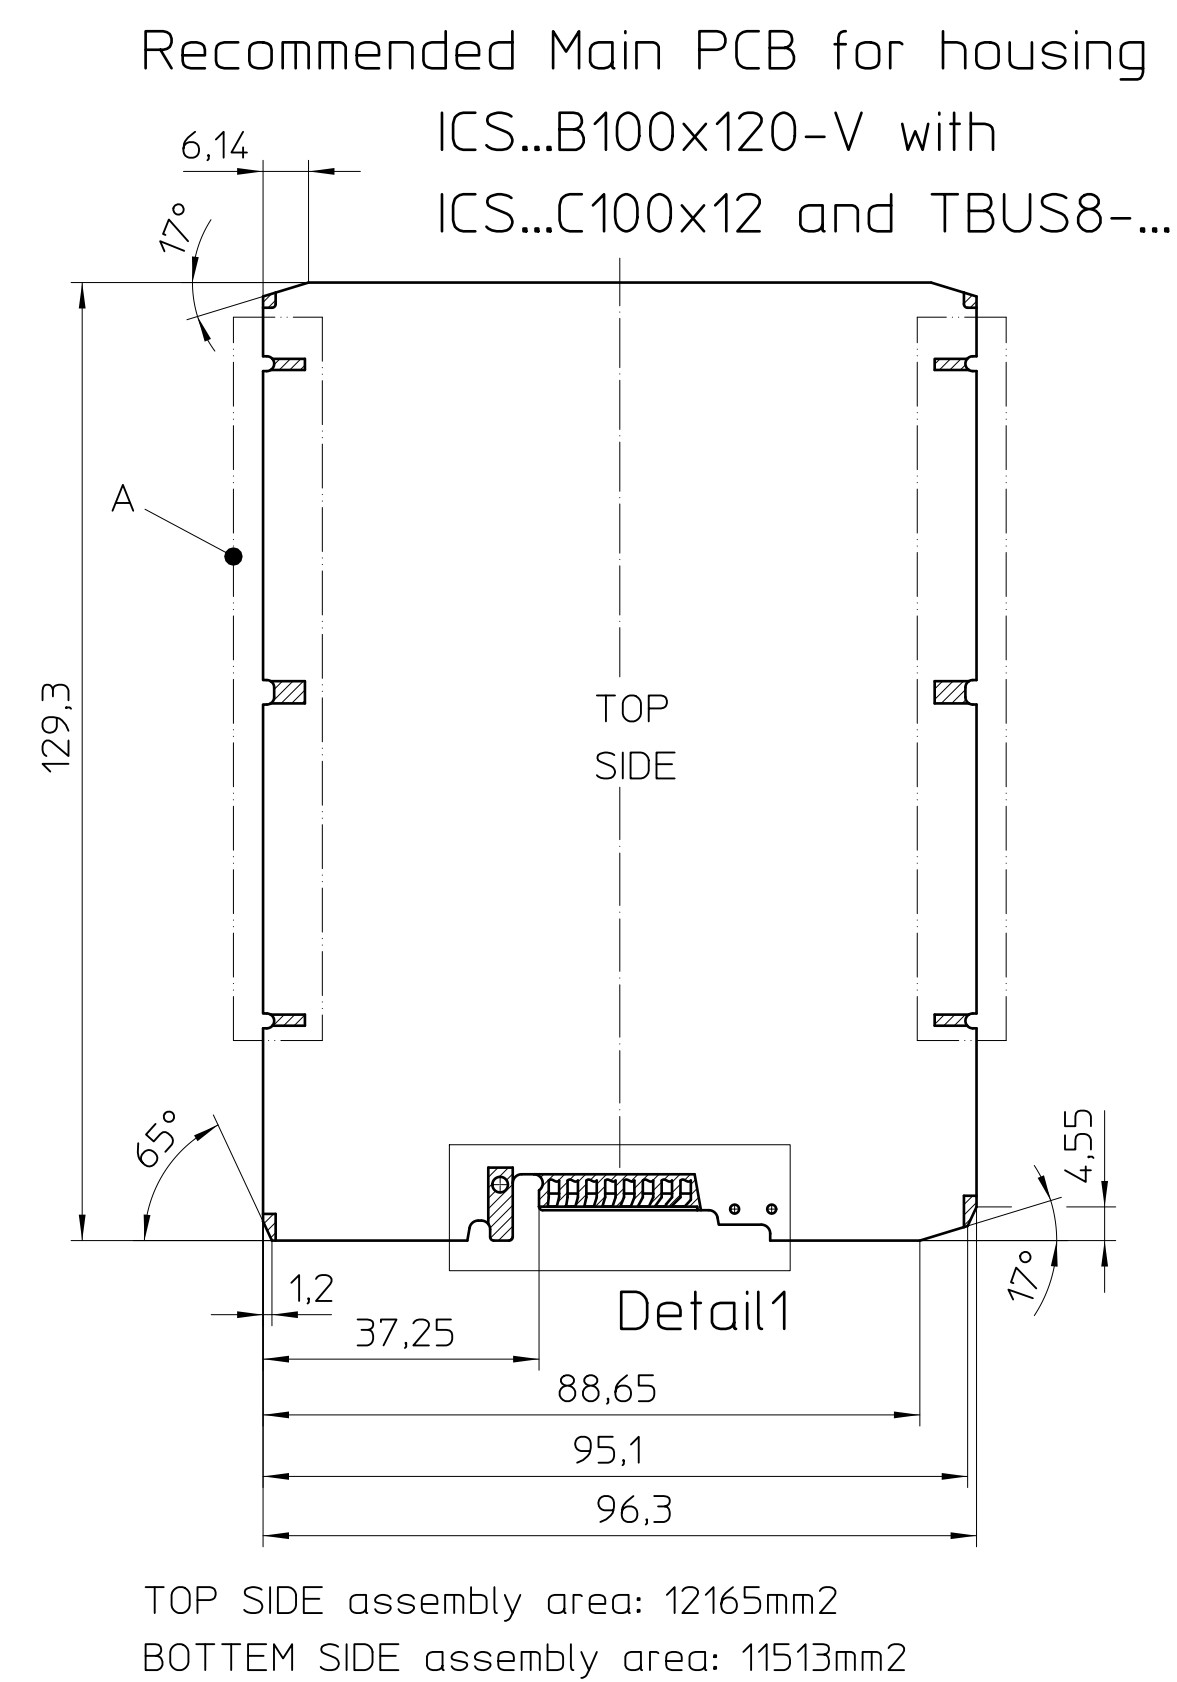
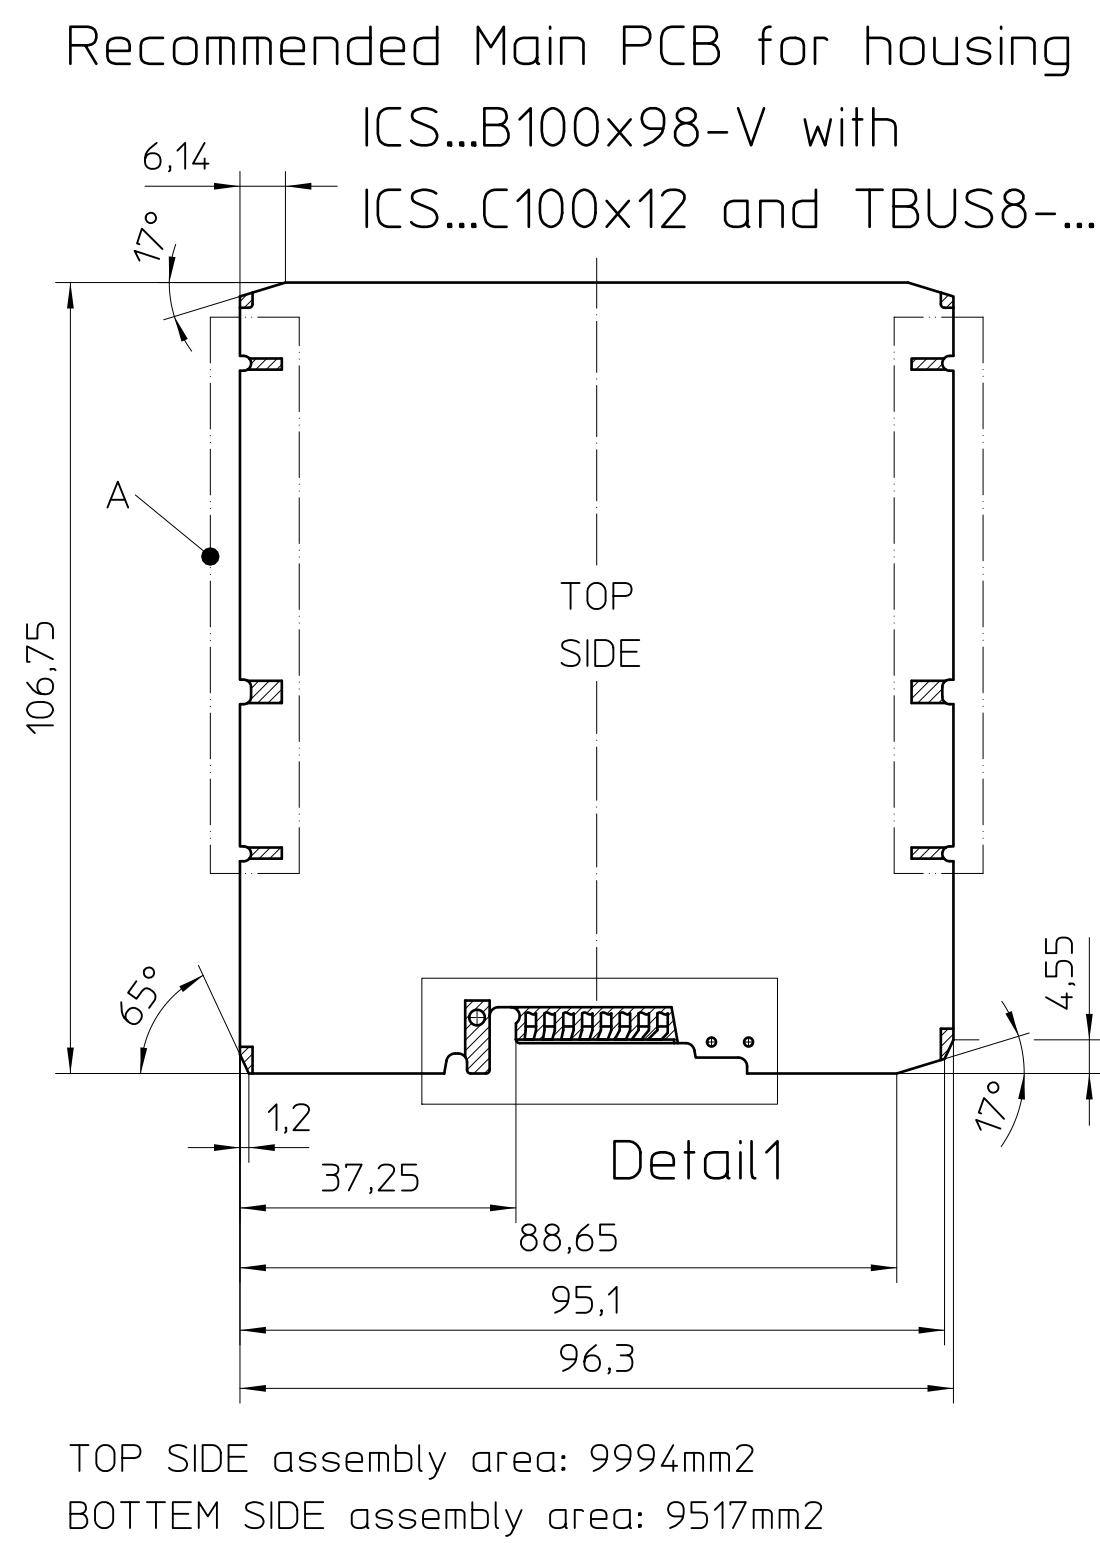


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.



- General Information:
 - Recommended PCB
 - Simplified representation
 - Document excluded from change process
 - CAD data see download-center on www.phoenixcontact.com
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Tolerances for PCB:
 - dimensions ≤ 30 : $\pm 0,10$ / $R \pm 0,2$ / $\pm 1^\circ$
 - dimensions > 30 : $\pm 0,15$ / $R \pm 0,2$ / $\pm 1^\circ$
 - symmetry: 0,2
 - Thickness PCB: $t = 1,6 \pm 0,2$
 -  Restricted area, no components

- Additional Information
- A) Variable area for connection technology or filler ICS...-F...
 - B) Hole for snap fit
 - C) Area for TBUS...-PPPP....
- Additional information see download-center
on www.phoenixcontact.com
- D) Hole for ICS-FE-CONTACT

 DIN A1	document-No. / RI		date	scale
	10207853 / 04		12.06.2025	1:1
	ident.-No.	document-type		
	1072372	TECDOC 2D_PCB-Outline		
description		ICS25-B122X98-V-5015		
page 1	of 1			