

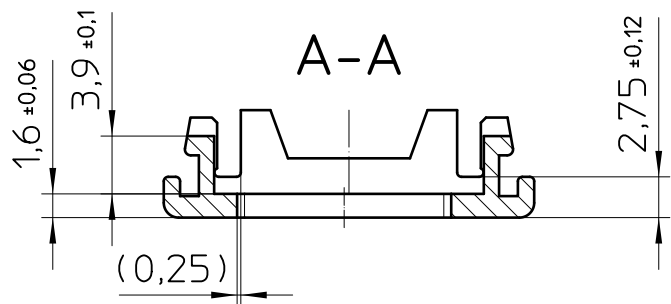
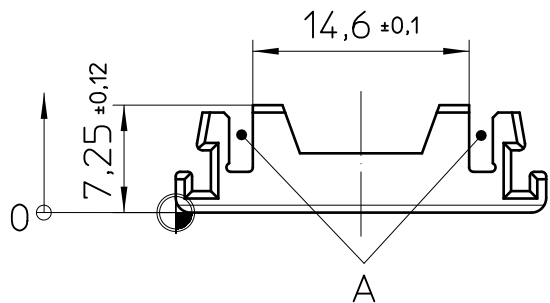
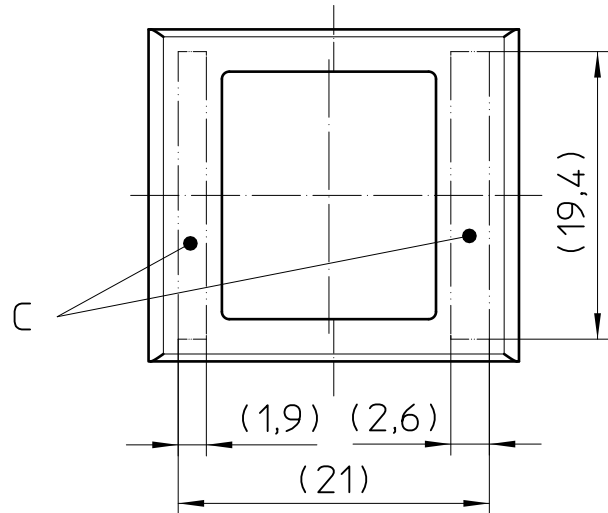
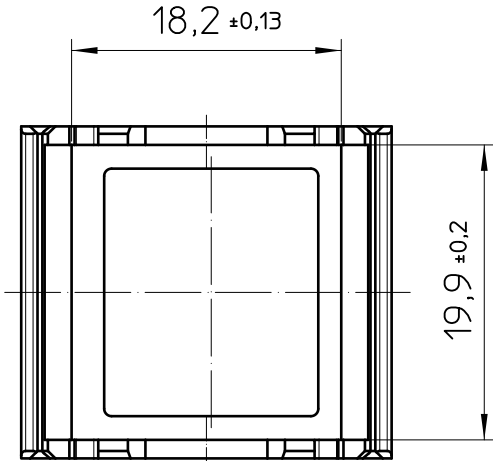





FILLER

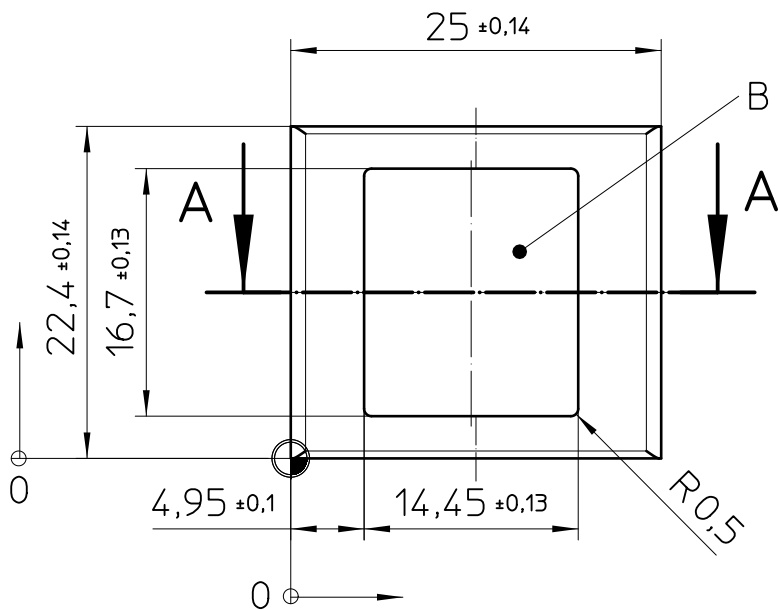

depth
width
height

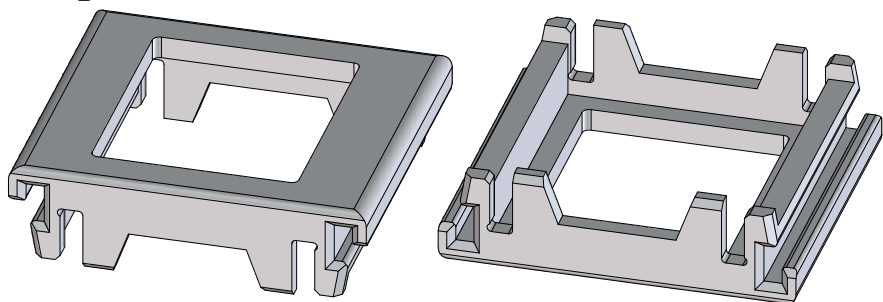

Assembly example

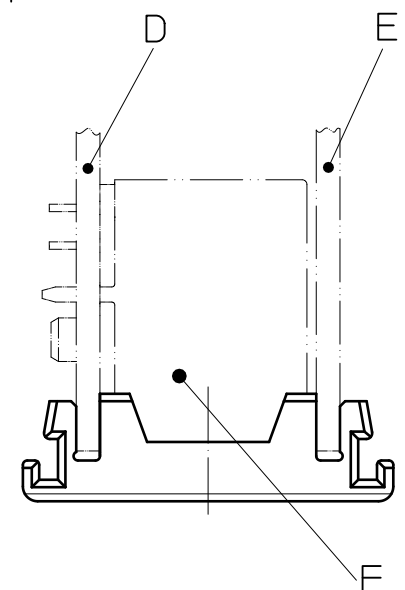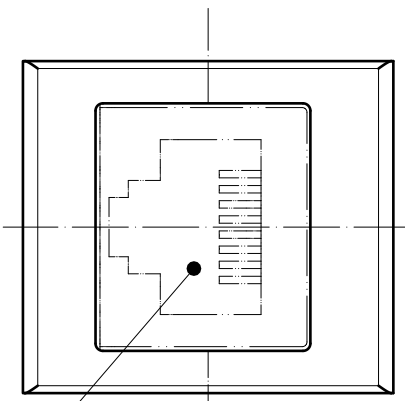

General Information:

- Simplified representation, exemplary shown in gray
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Workpiece zero point for printing processing
- Tolerances for printing DIN ISO 2768-m
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

- A. PCB guidance
- B. Opening for connector RJ45
- C. Marking area for pad printing, other printing process on request
- D. Main PCB, thickness= 1,6±0,2
- E. Second PCB, thickness= 1,6±0,2
- F. Connector RJ45-socket

Pos.	QTY	Description	Material
1	1	FILLER	PA
DIN A3		document-No. / RI 01118110 / 03	date 08.04.2025
		ident.-No. 1072501	scale 2:1
page 1 of 1		document-type TECDOC 2D_Productdrawing	
		description ICS25-F22J-9005	