



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent has been obtained from the copyright holder. All rights are reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Der Fall der Patent-, Gebrauchsmuster- oder Designregistrations vorbehalten.


ICS25-F22S

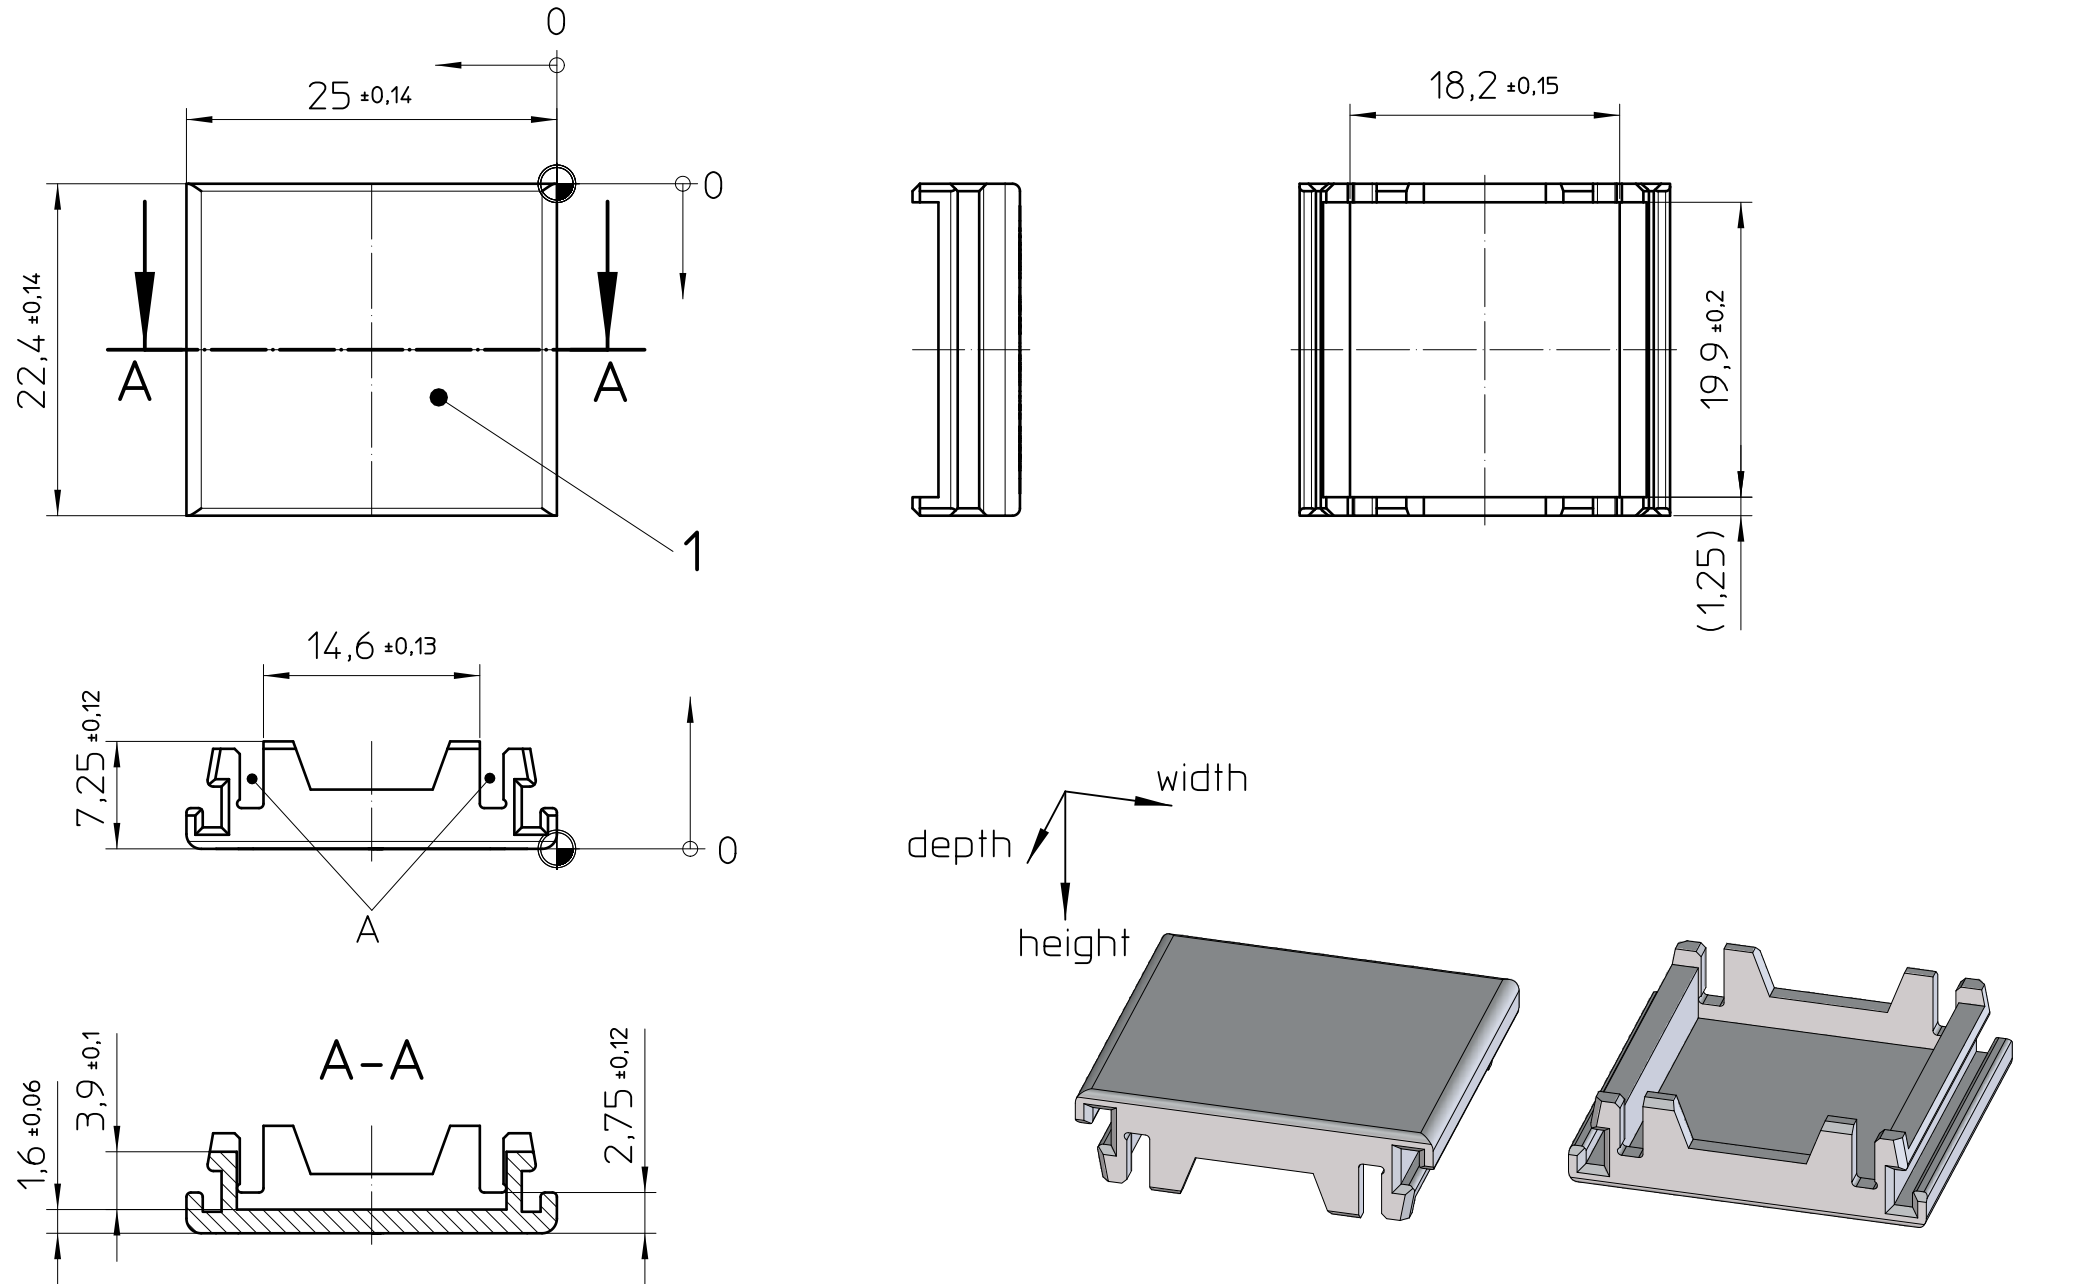


ICS25-F45S

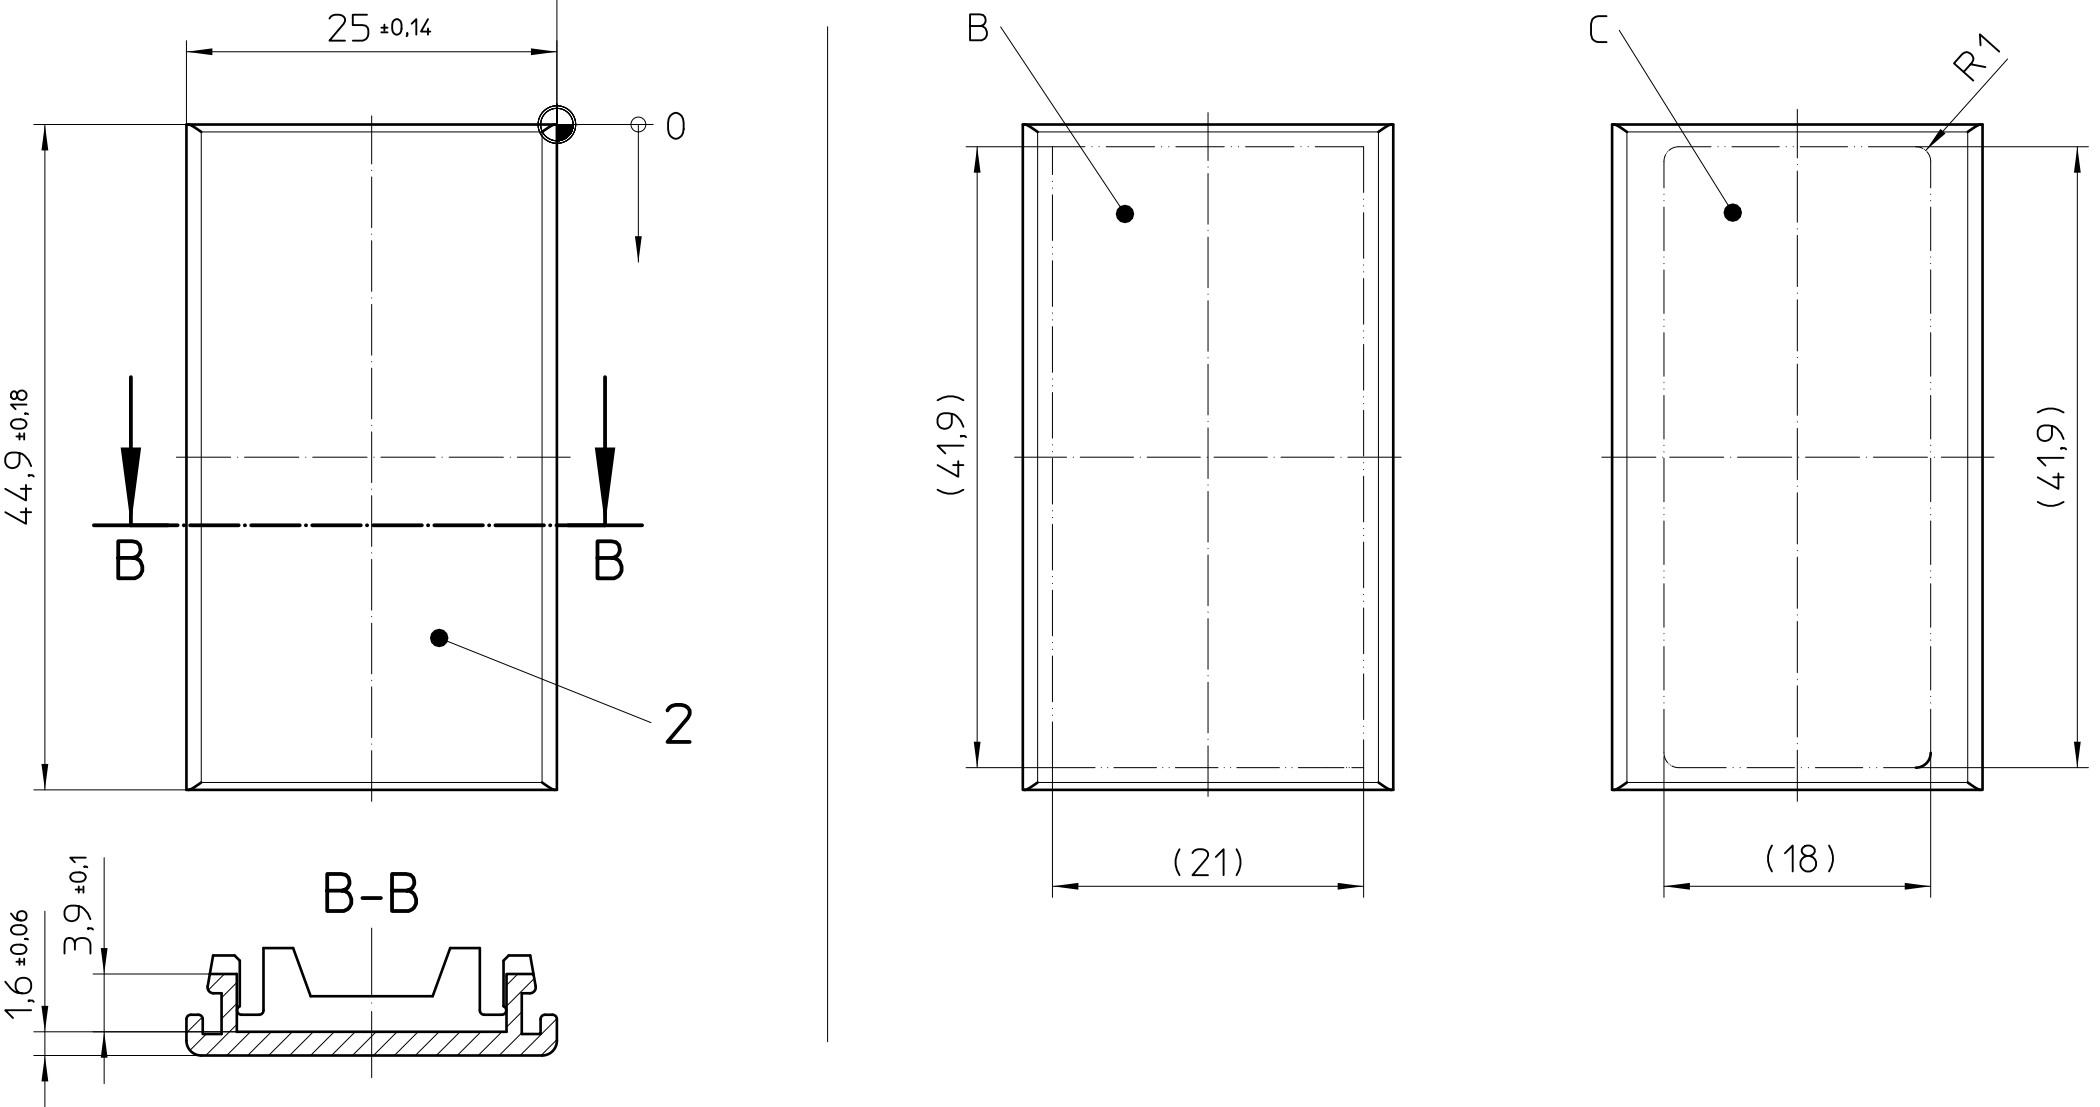


ICS25-F67S

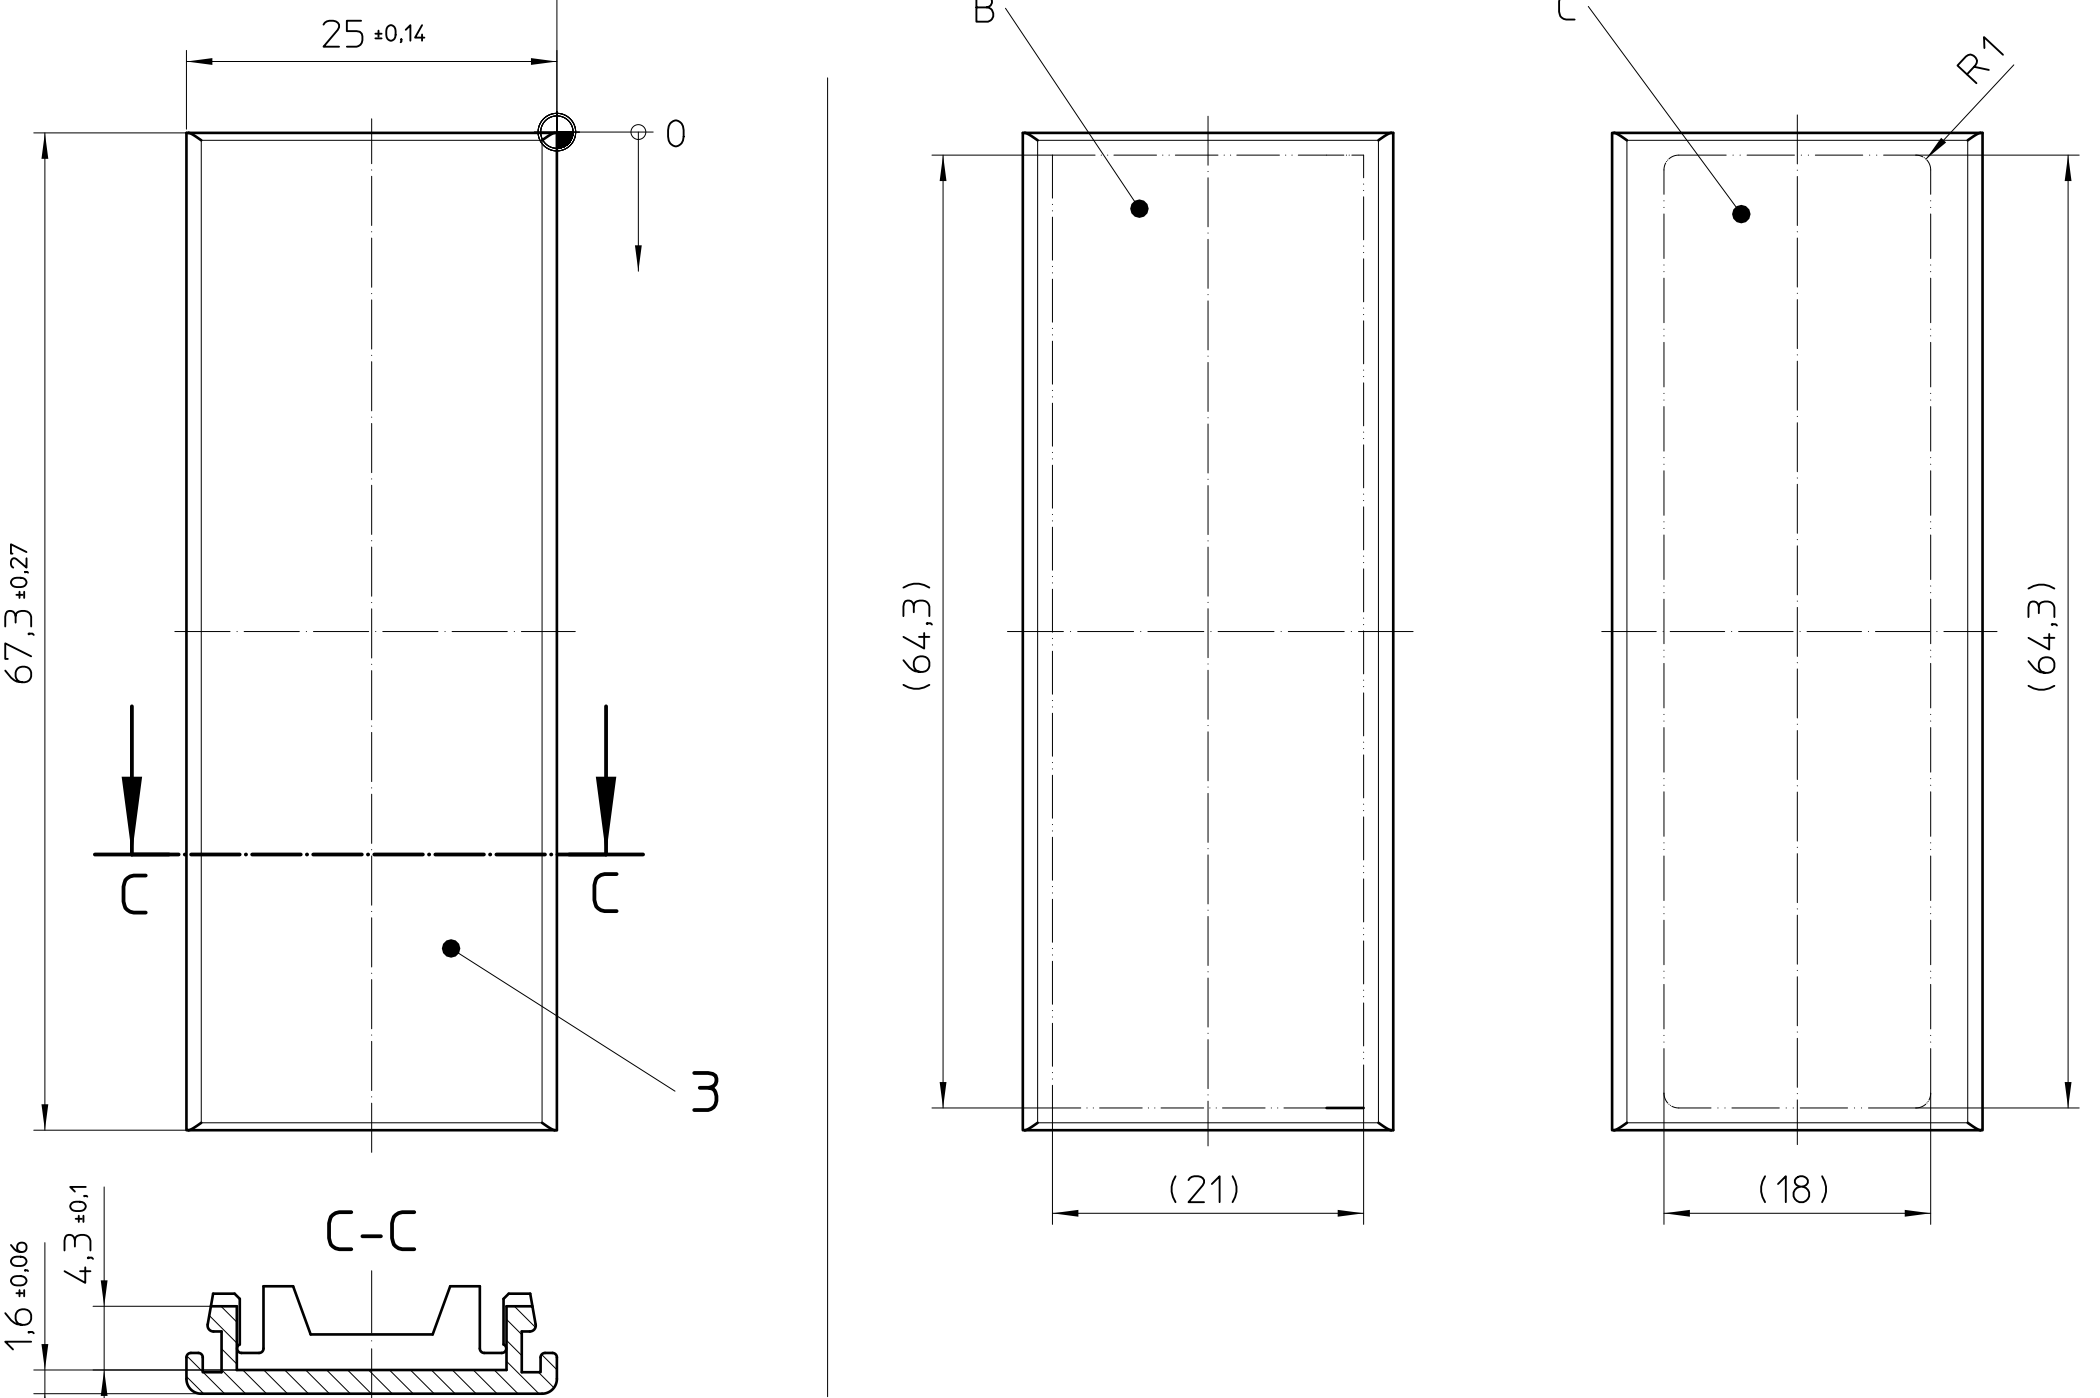


ICS25-F112S

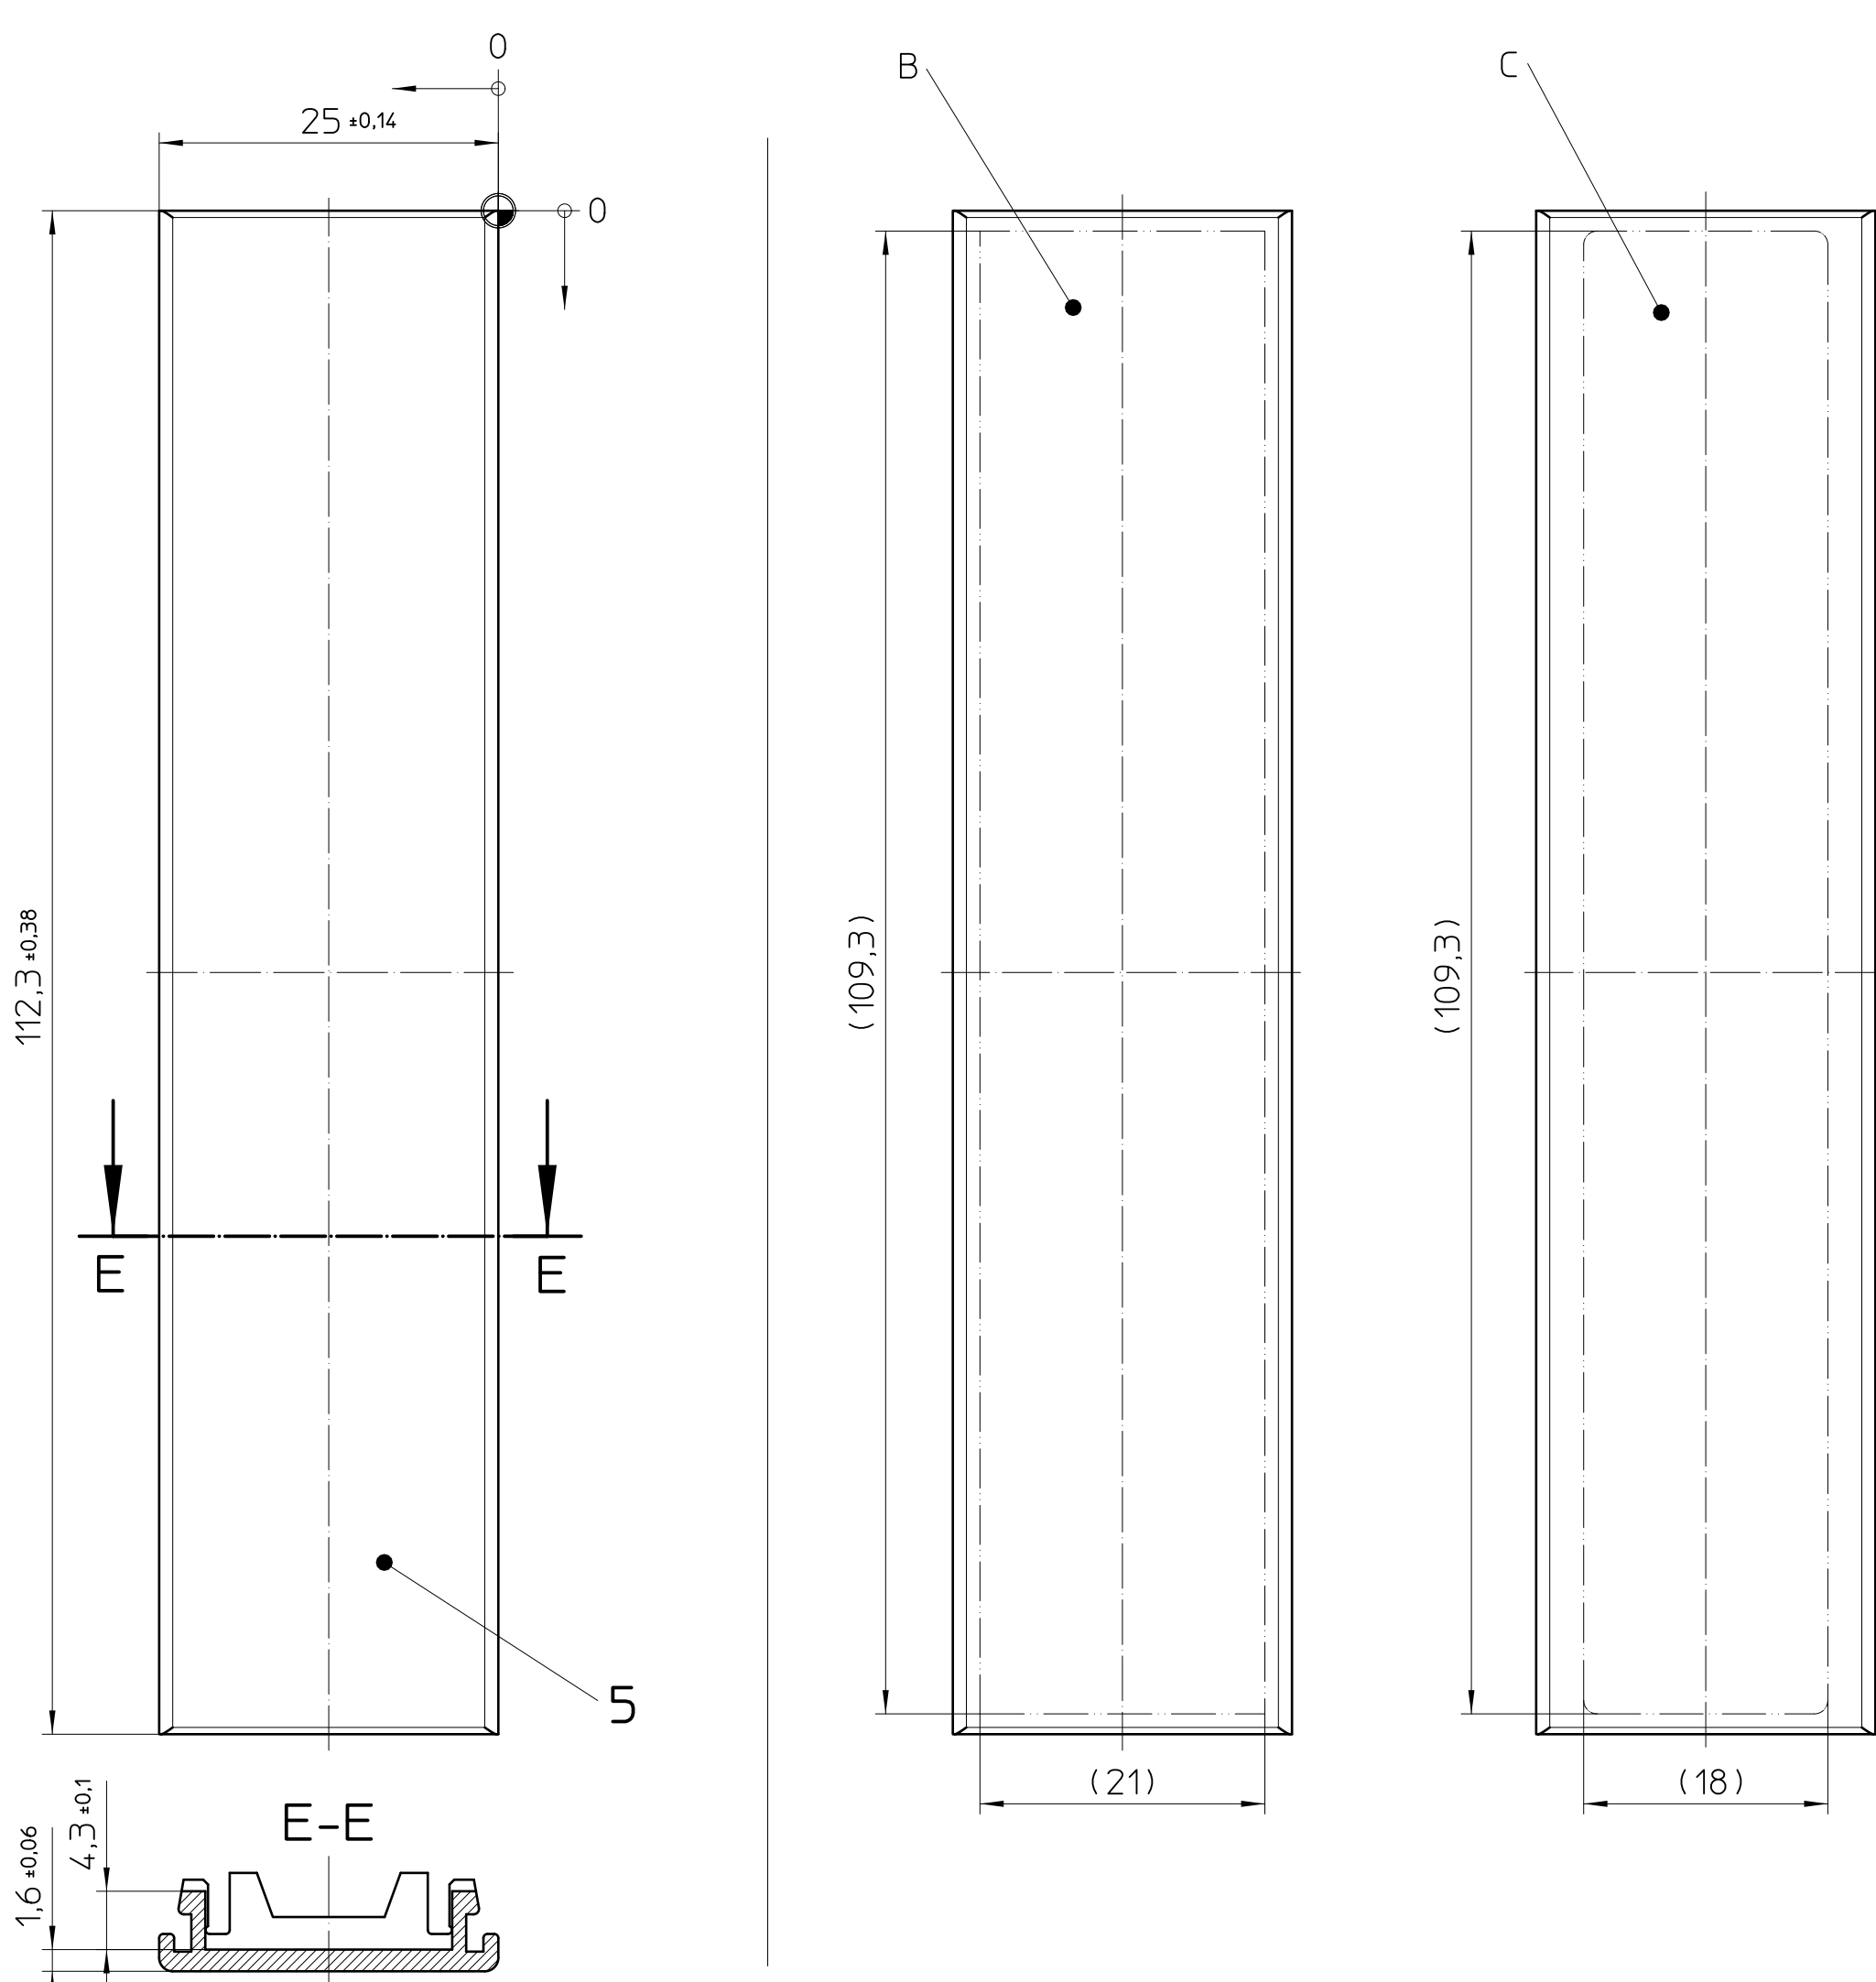

ICS25-F90S

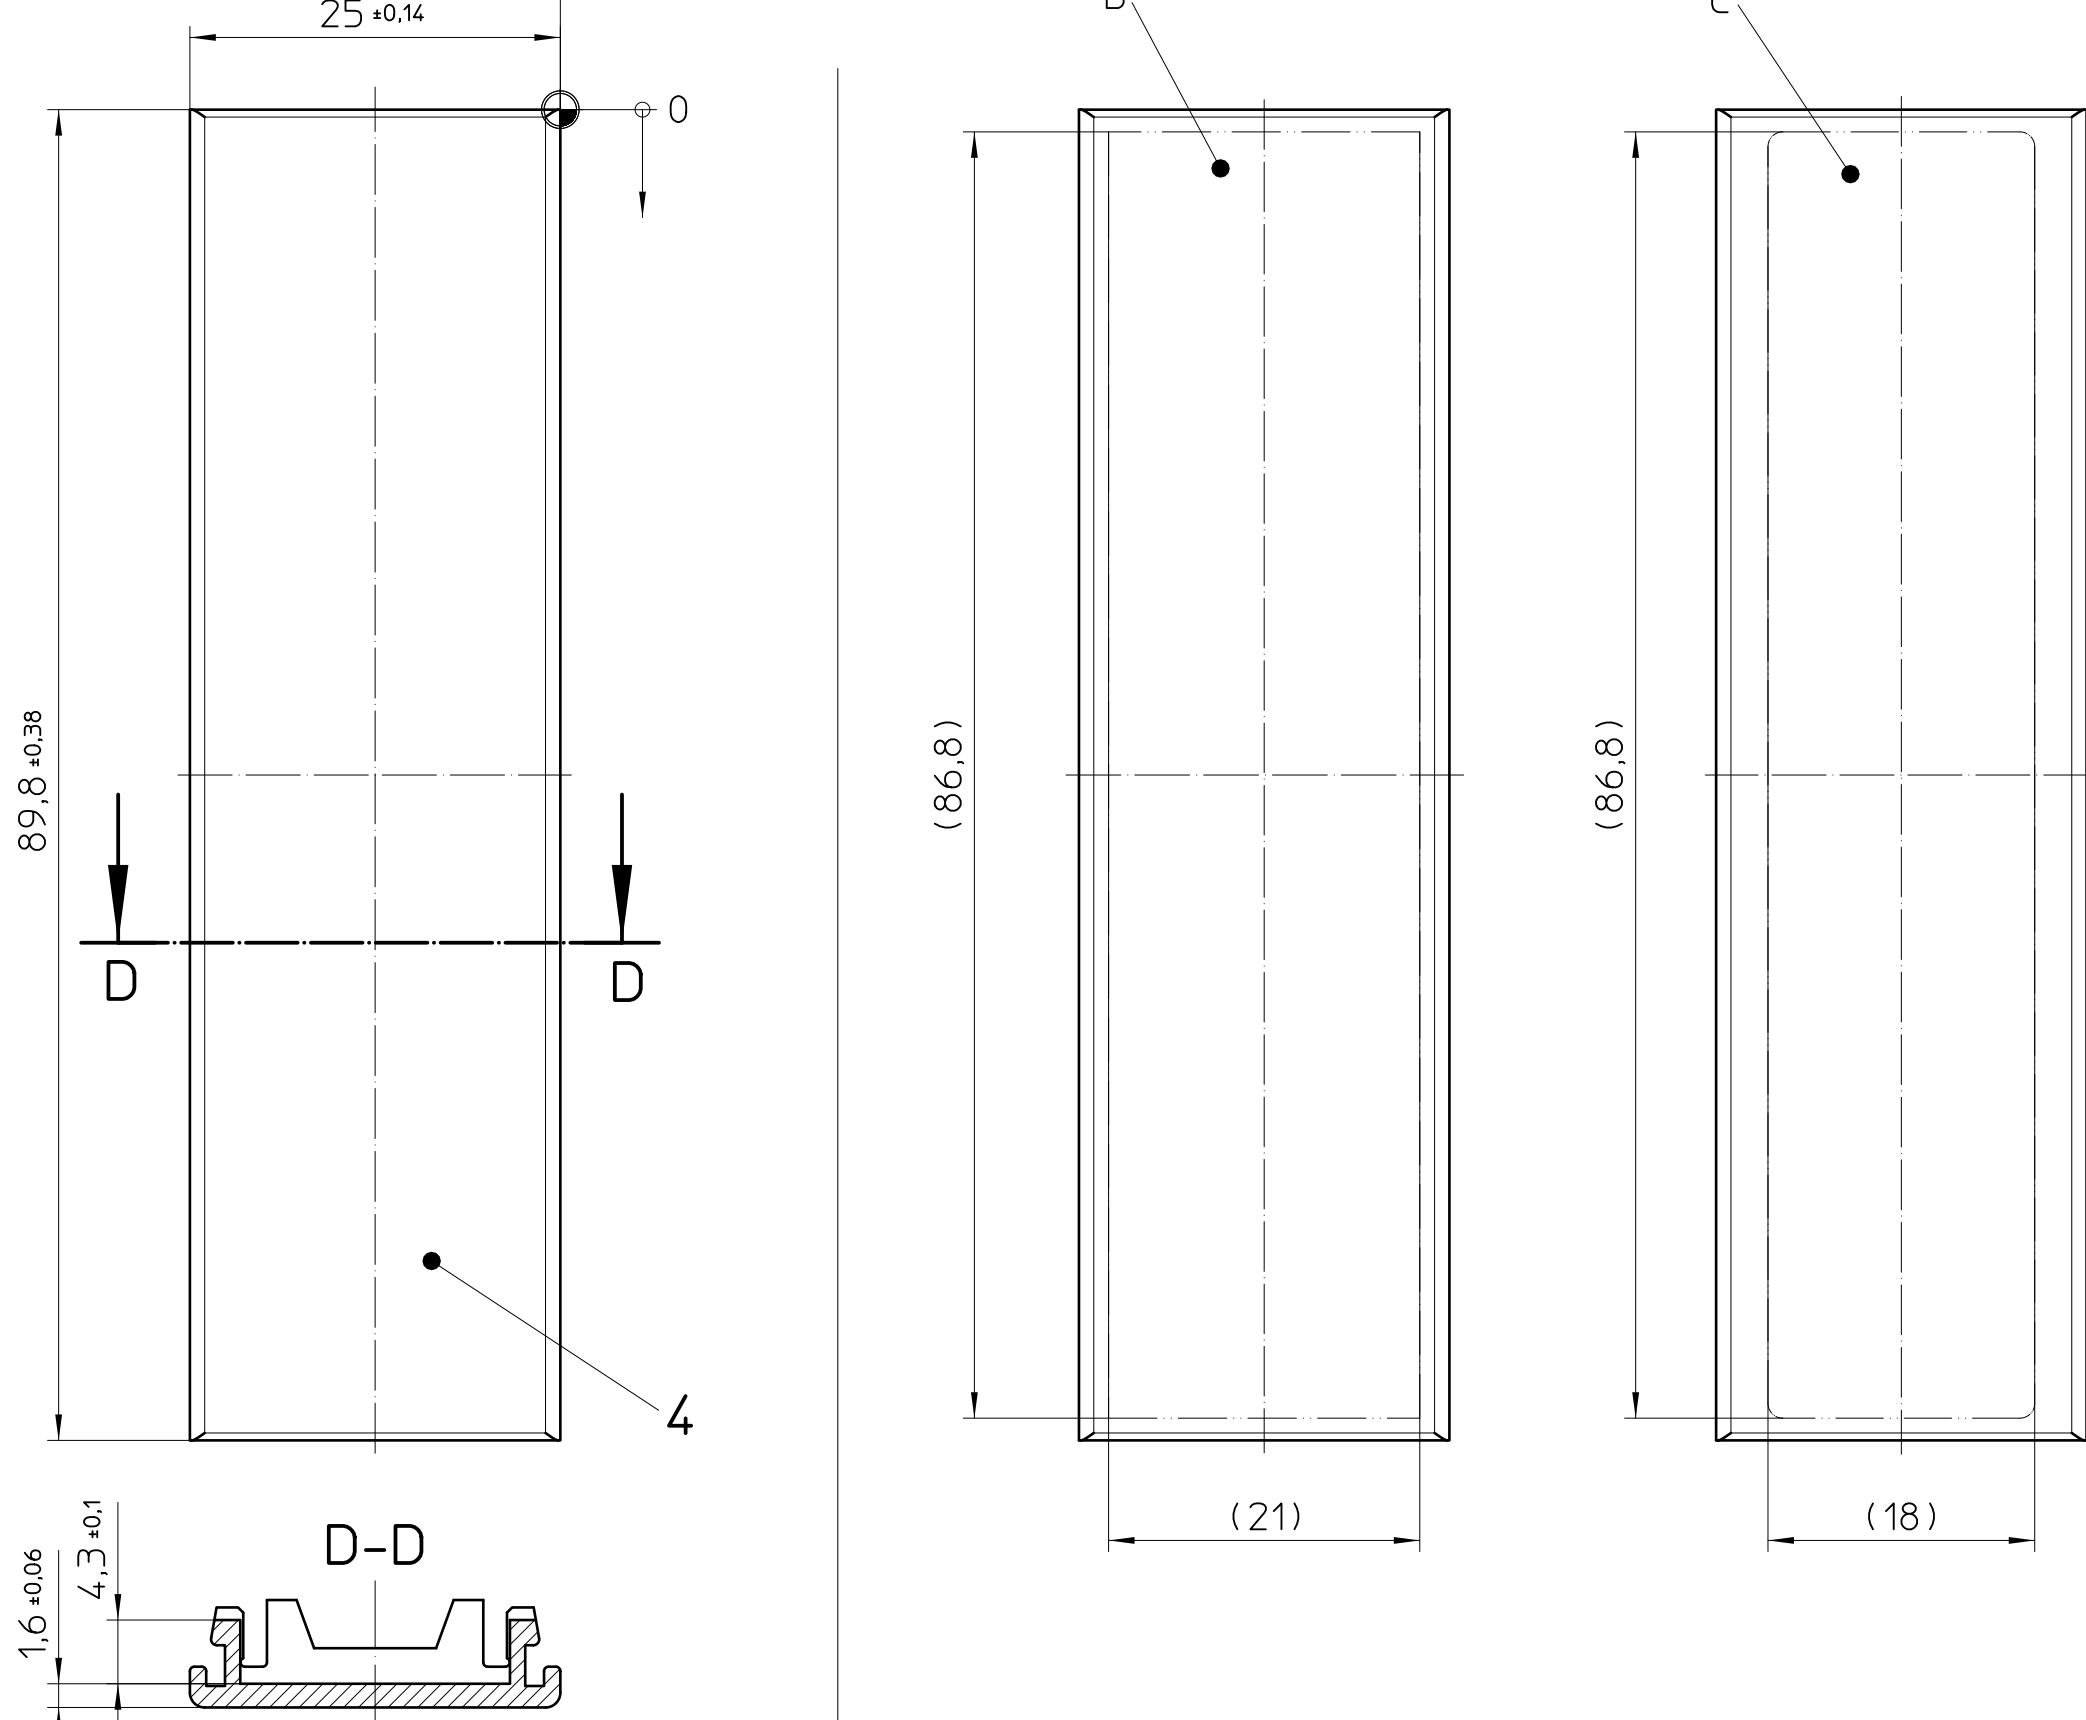

Assembly example

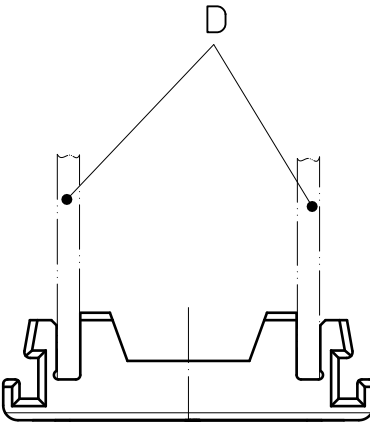

- General Information:
- Simplified representation
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2.
 - PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for mechanical processing
 - Tolerances for mechanical processing
 - milling contour to zero point ±0.2
 - milling to milling contour ±0.1
 - Machining radii min. R1, further on request
 - Tolerances for printing DIN ISO 2768-m
 - Web: www.phoenixcontact.com webcode: #1635
- Additional Information:
- A) PCB guidance
 - B) Marking area only for pad printing, other printing processes on request
 - C) Machining area
 - D) PCB, thickness=1.6 ±0.2

Pos.	QTY	description	material
1	1	ICS25-F22S	PA
2	1	ICS25-F45S	PA
3	1	ICS25-F67S	PA
4	1	ICS25-F90S	PA
5	1	ICS25-F112S	PA
DIN A1 01072806 / 03			
date 08.04.2025		scale 2:1	
ident.-No. 1072519		document-type IECDOC 2D_Productdrawing	
description		ICS25-F45S-9005	
page 1	of 1		