

A








B

C

D

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent has been granted by the Phoenix Contact AG. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

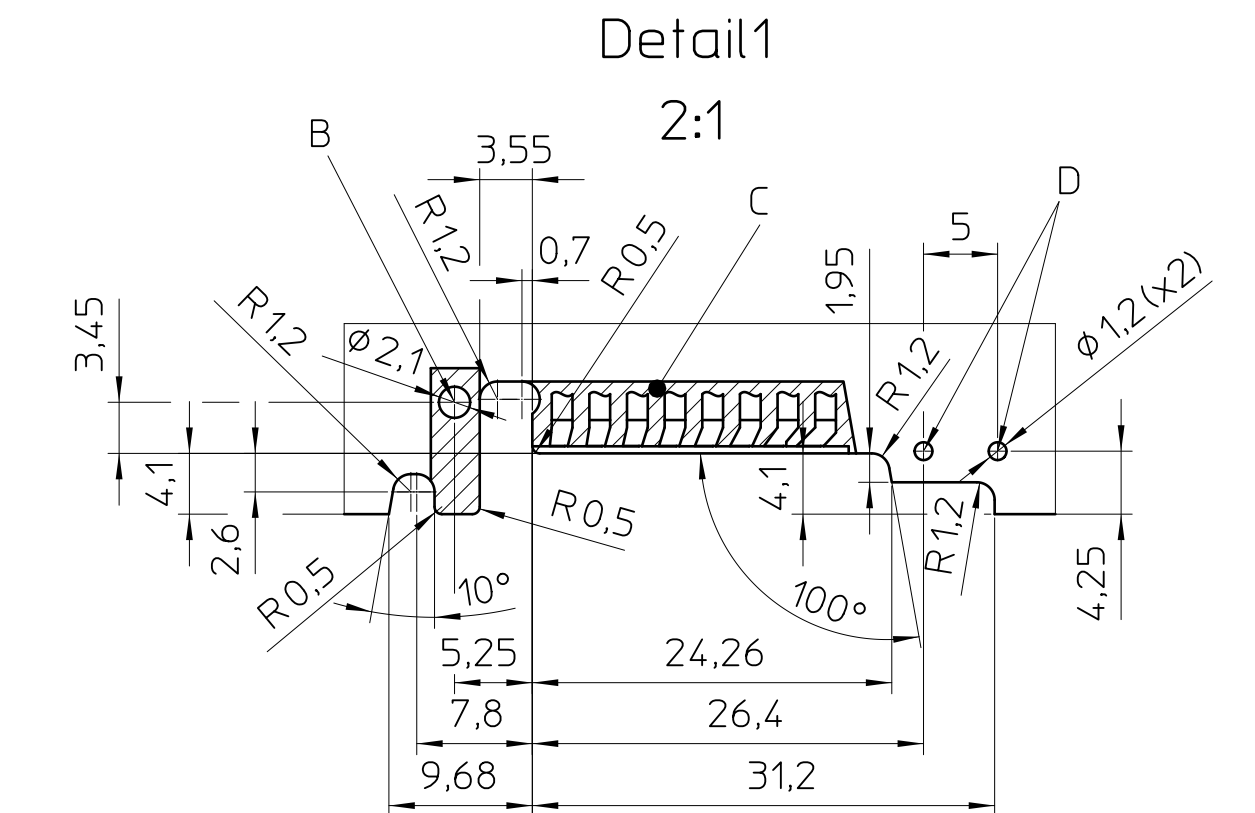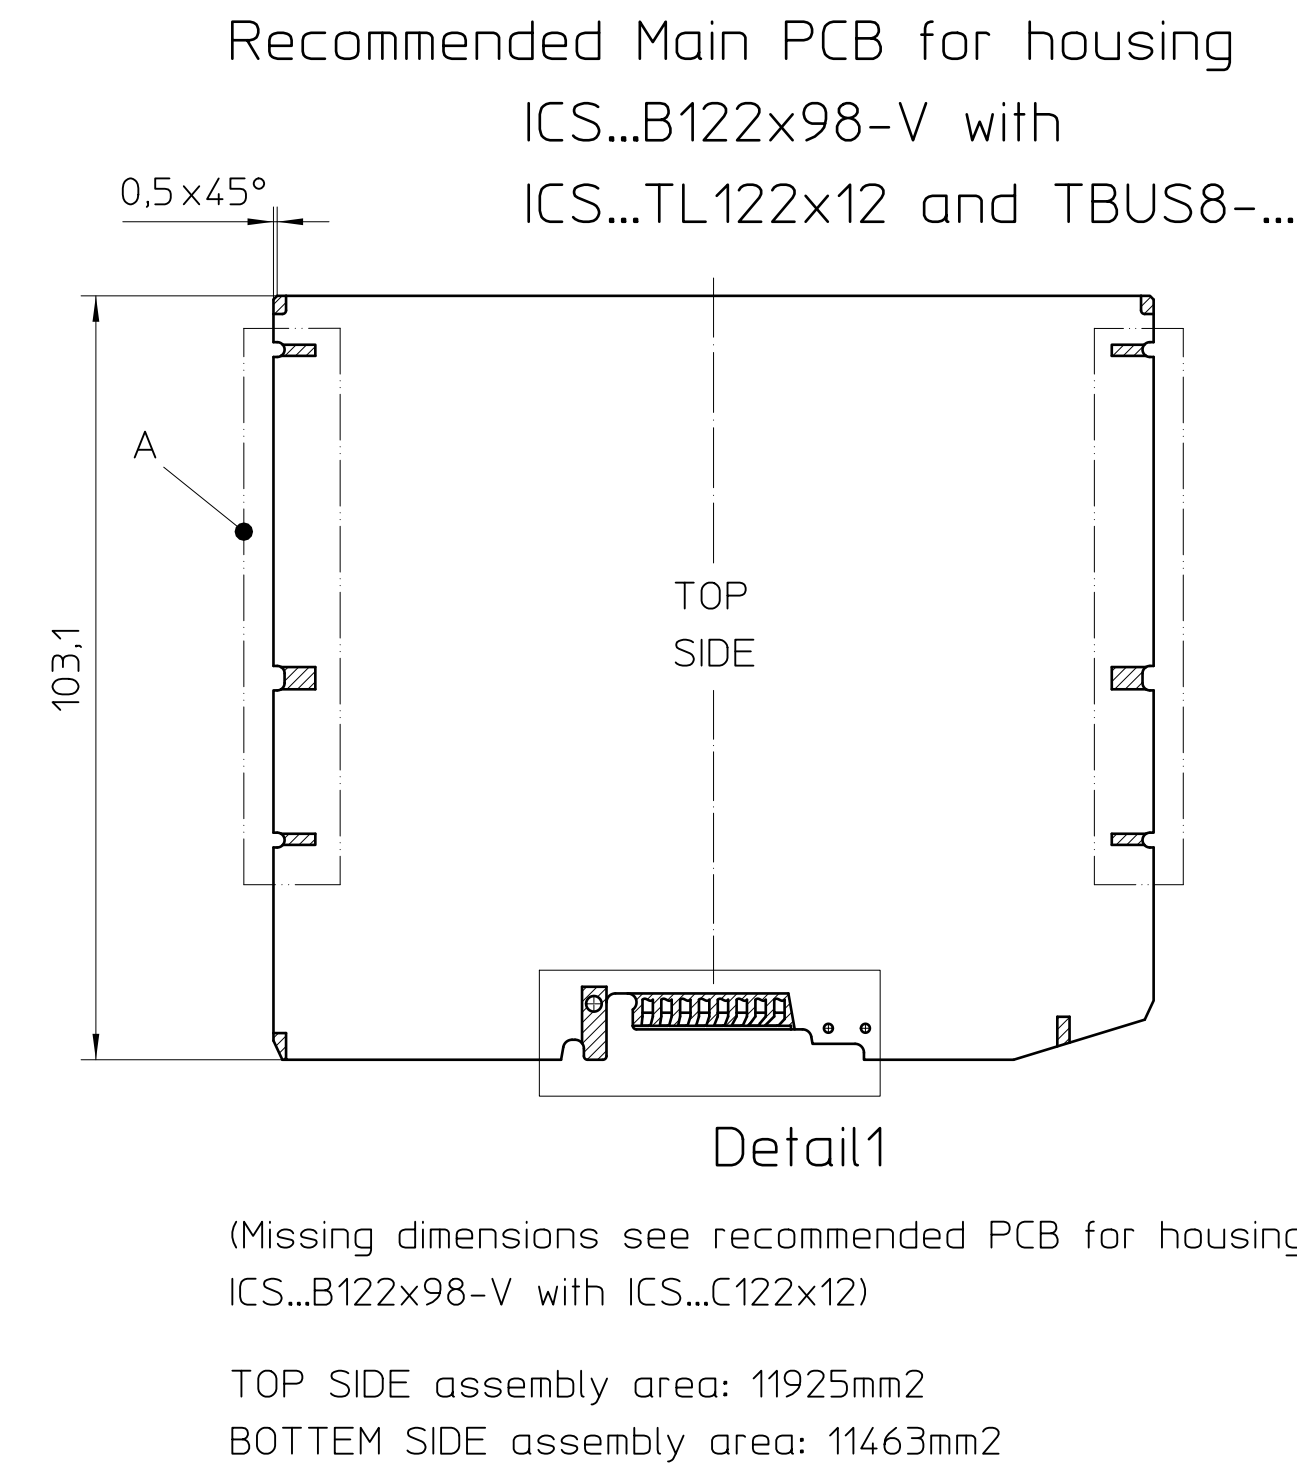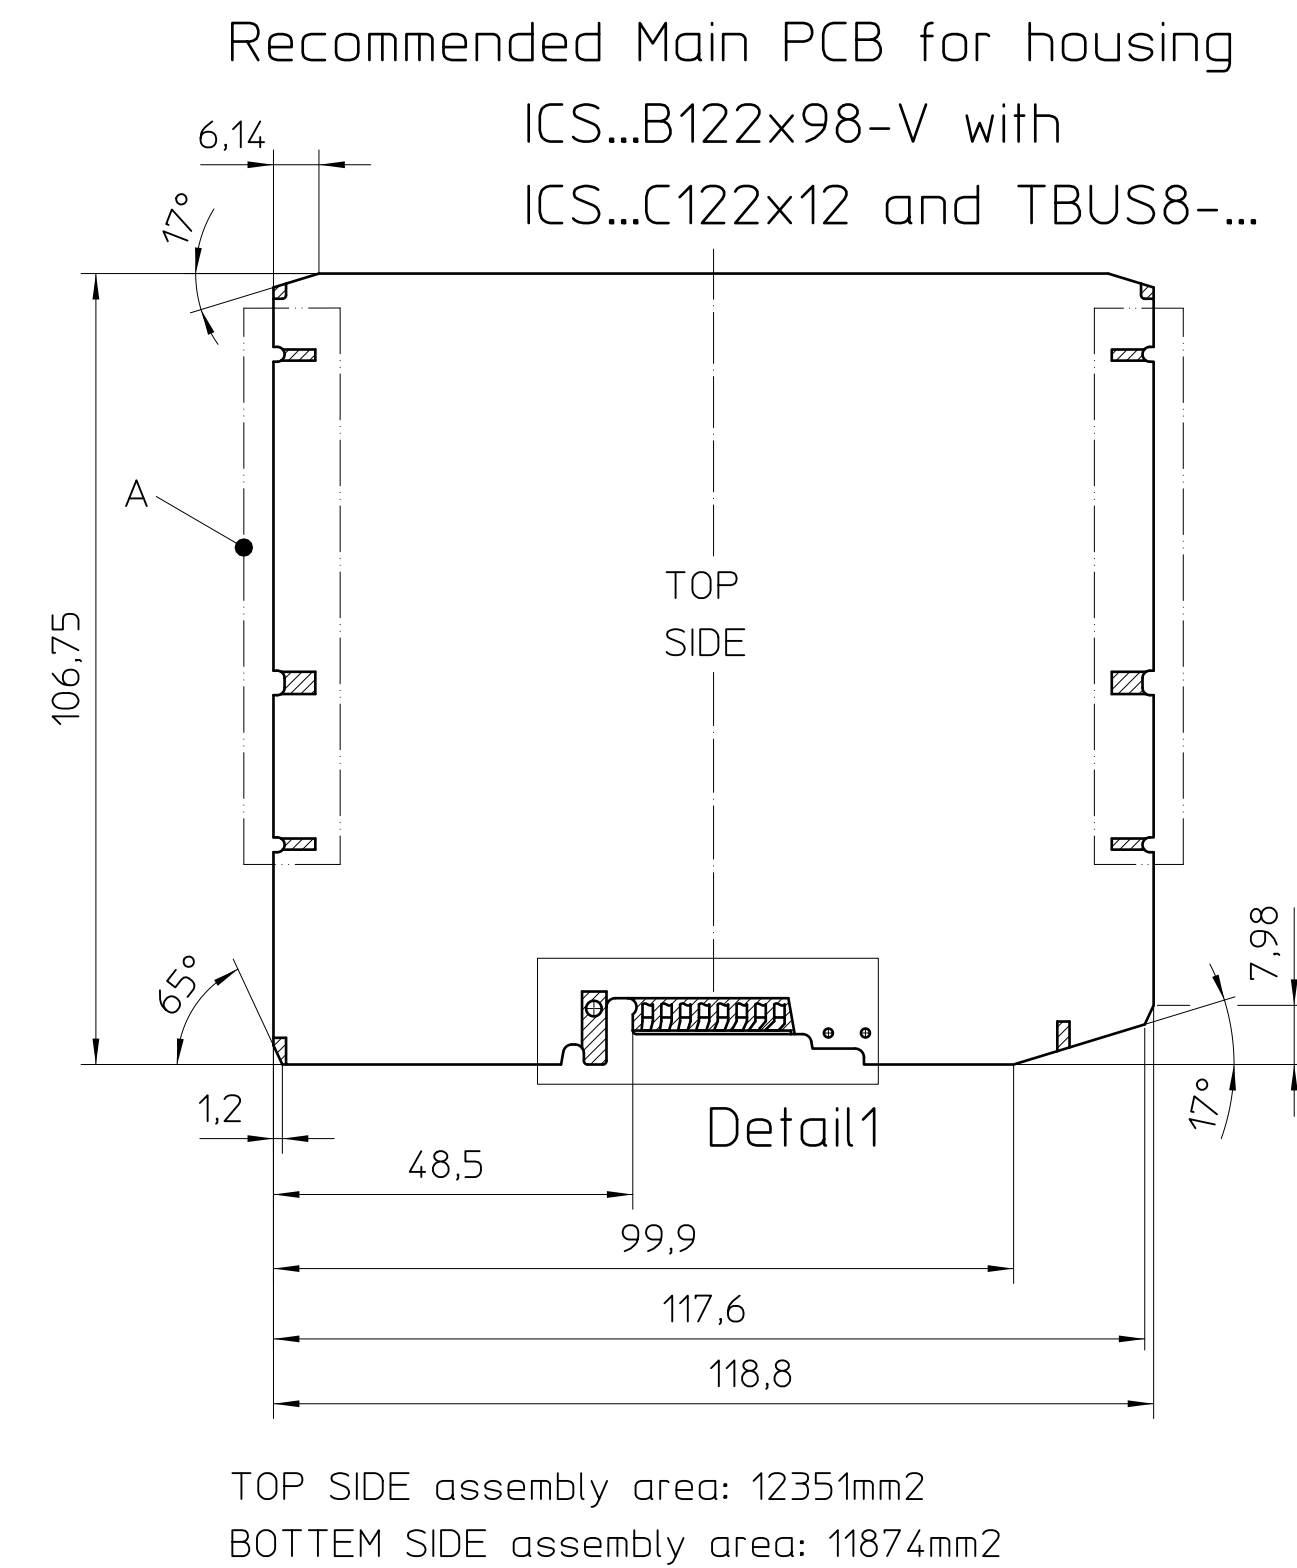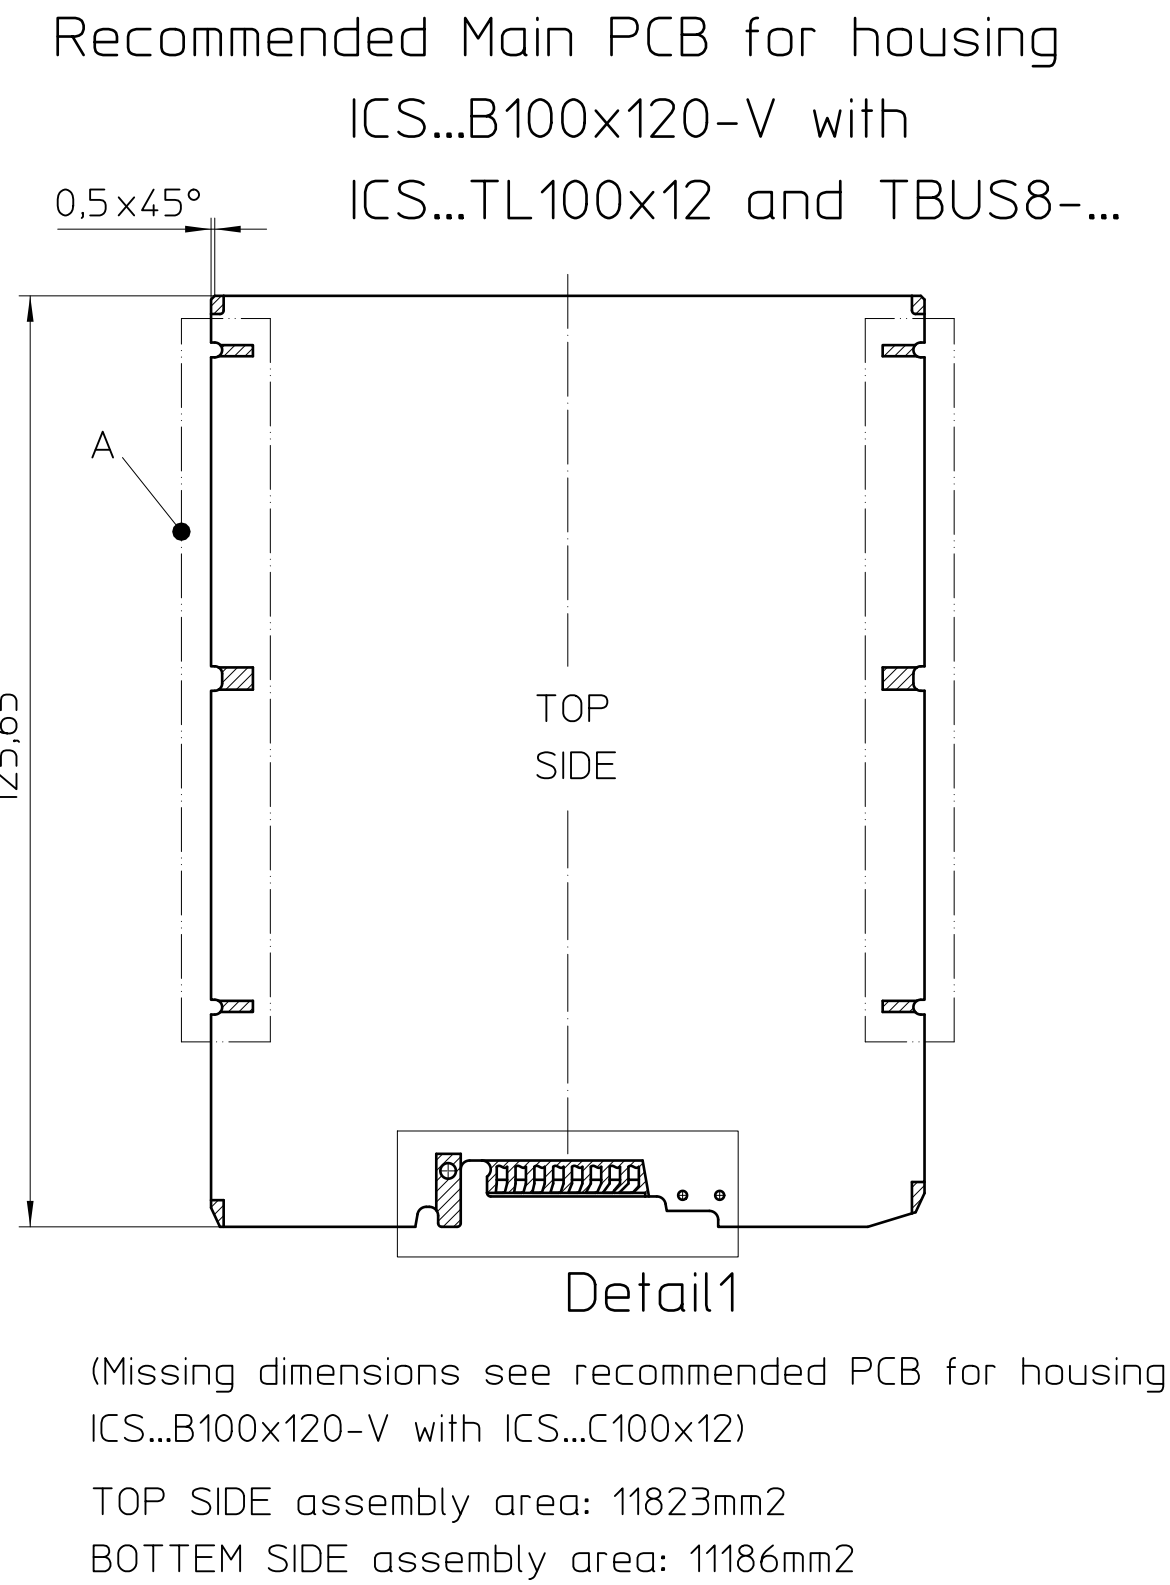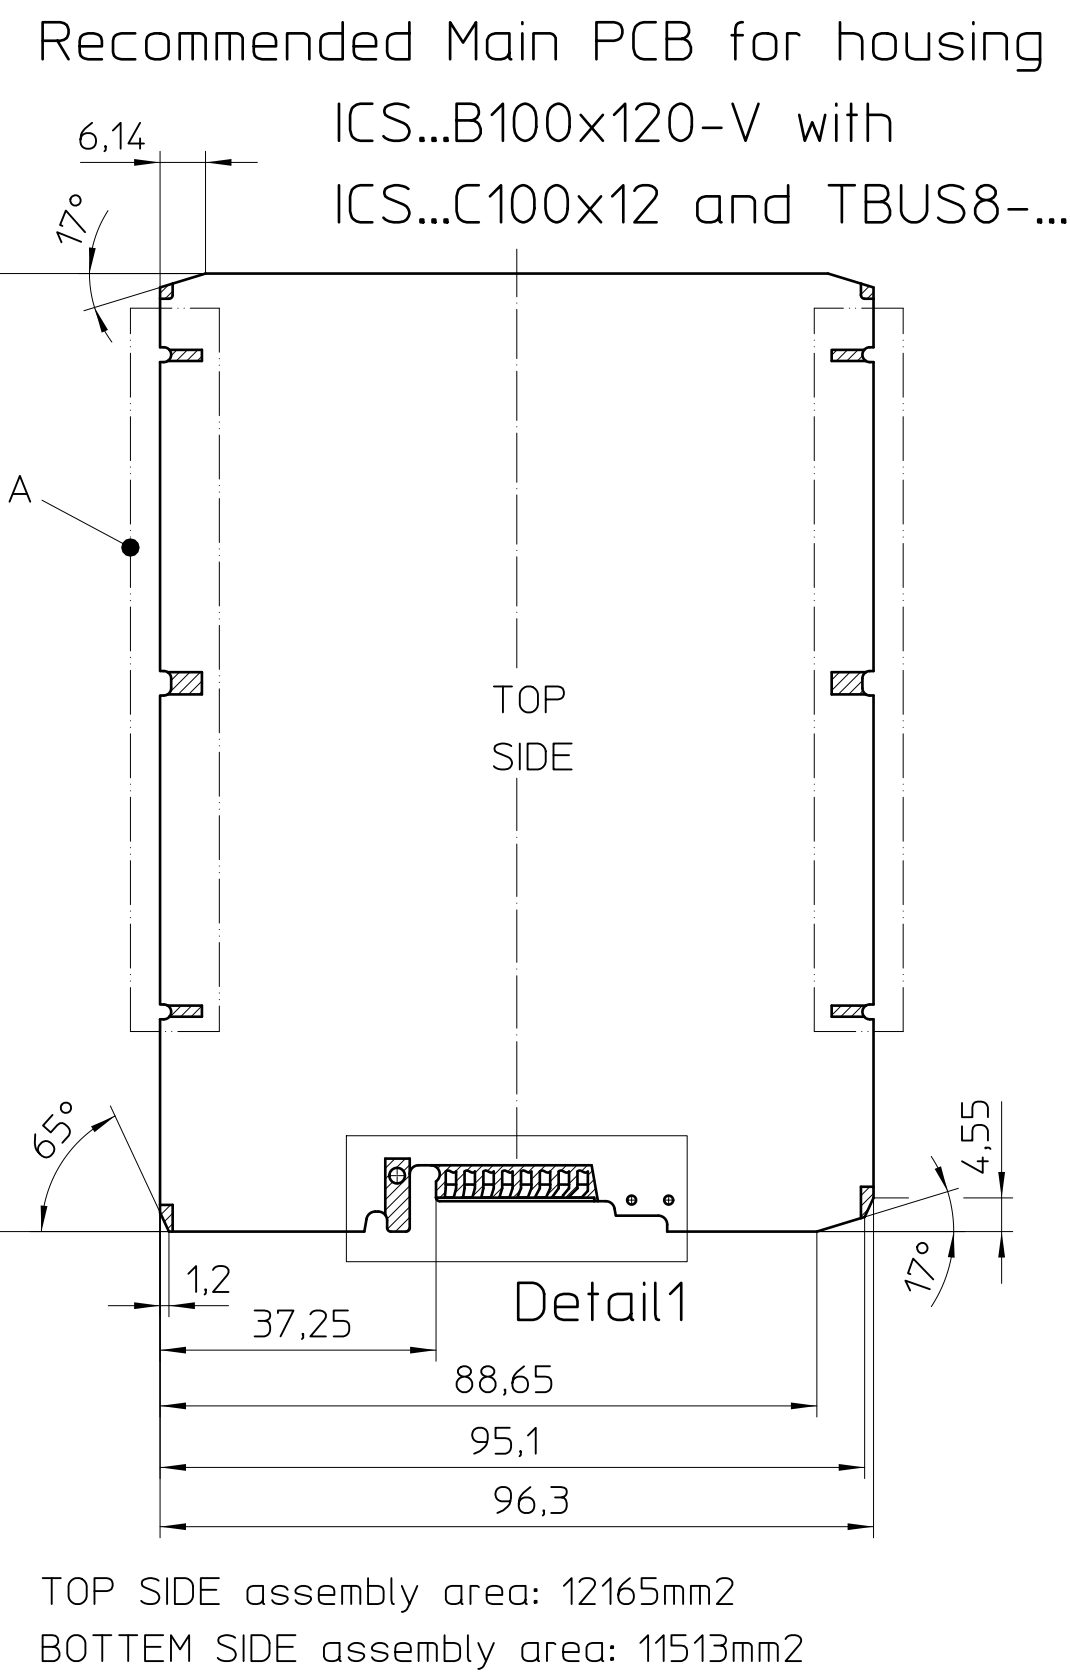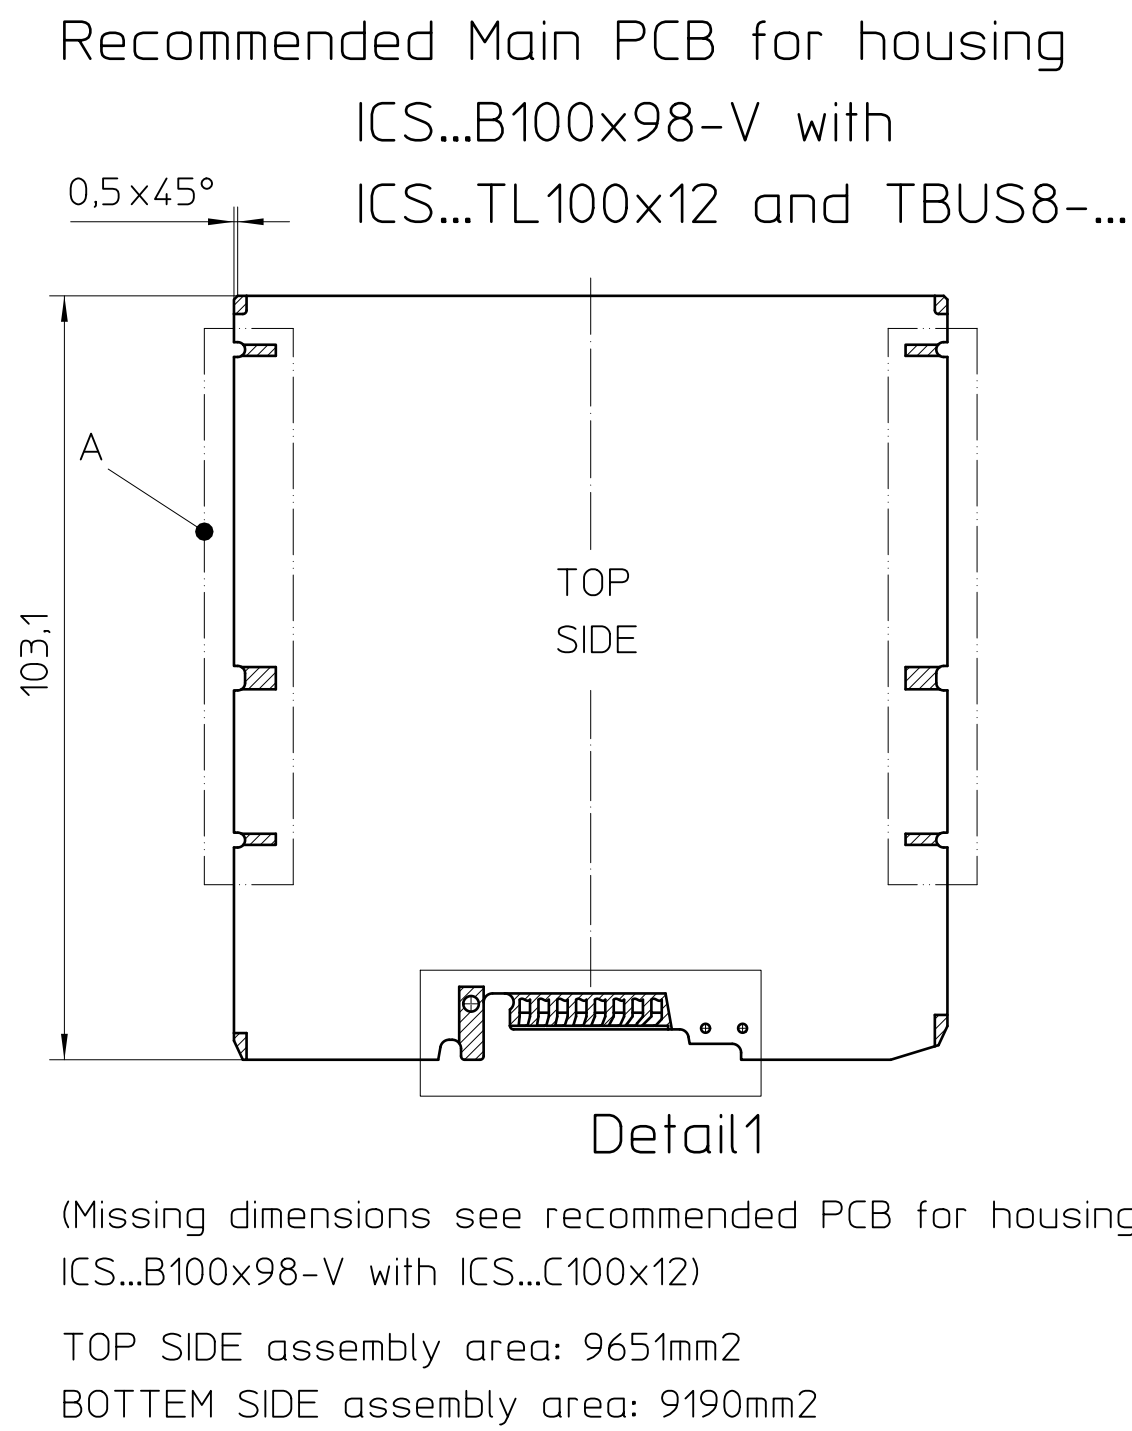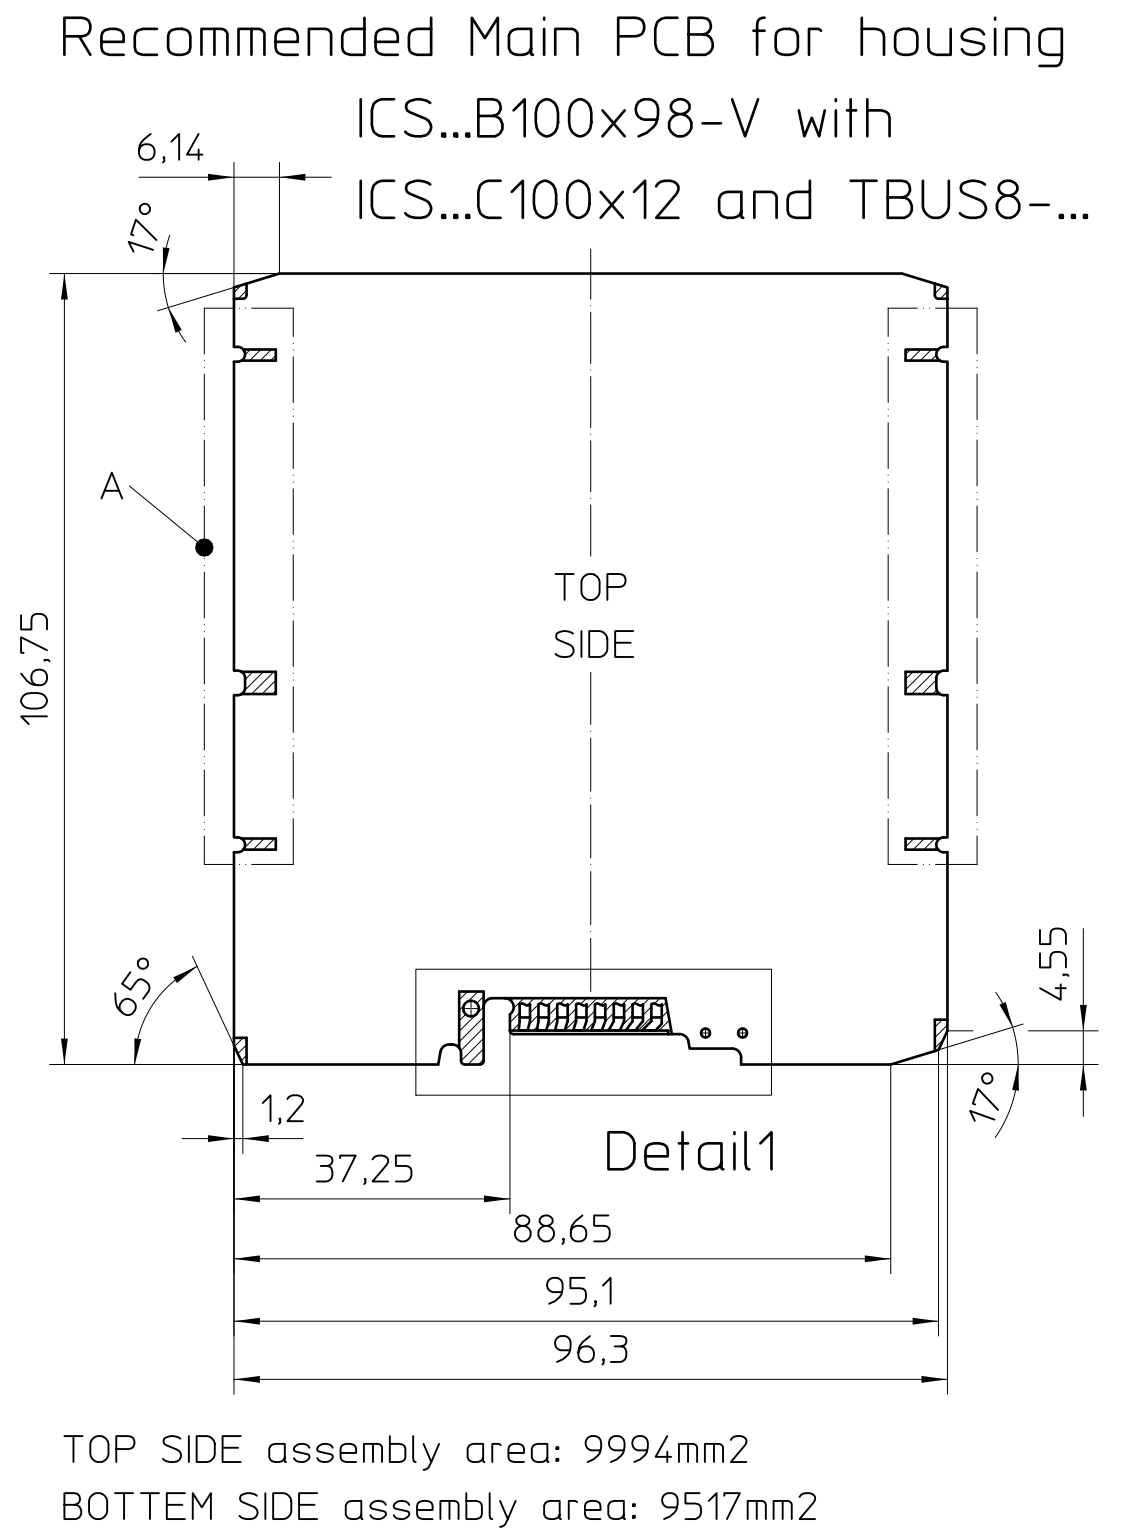

- General Information:
- Recommended PCB
 - Simplified representation
 - Document excluded from change process
 - CAD data see download-center on www.phoenixcontact.com
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Tolerances for PCB:
dimensions ≤ 30: ±0,10 / R±0,2 / ±1°
dimensions > 30: ±0,15 / R±0,2 / ±1°
symmetry: 0,2
 - Thickness PCB: t=1,6±0,2
 - Restricted area, no components

- Additional Information
- A) Variable area for connection technology or filler ICS...-F...
B) Hole for snap fit
C) Area for TBUS-...-PPPP....
Additional information see download-center on www.phoenixcontact.com
D) Hole for ICS-FE-CONTACT

	document-No. / Ri 01207853 / 04	date 12.06.2025	scale 1:1
	ident.-No. 1072526	document-type TECD0C 2D_PCB-Outline	
page 1	of 1	description ICS25-B122X98-V-9005	

1

2

3

4

5

6

7

8

9

10

11

A

B

C

D

E

F

G

H