


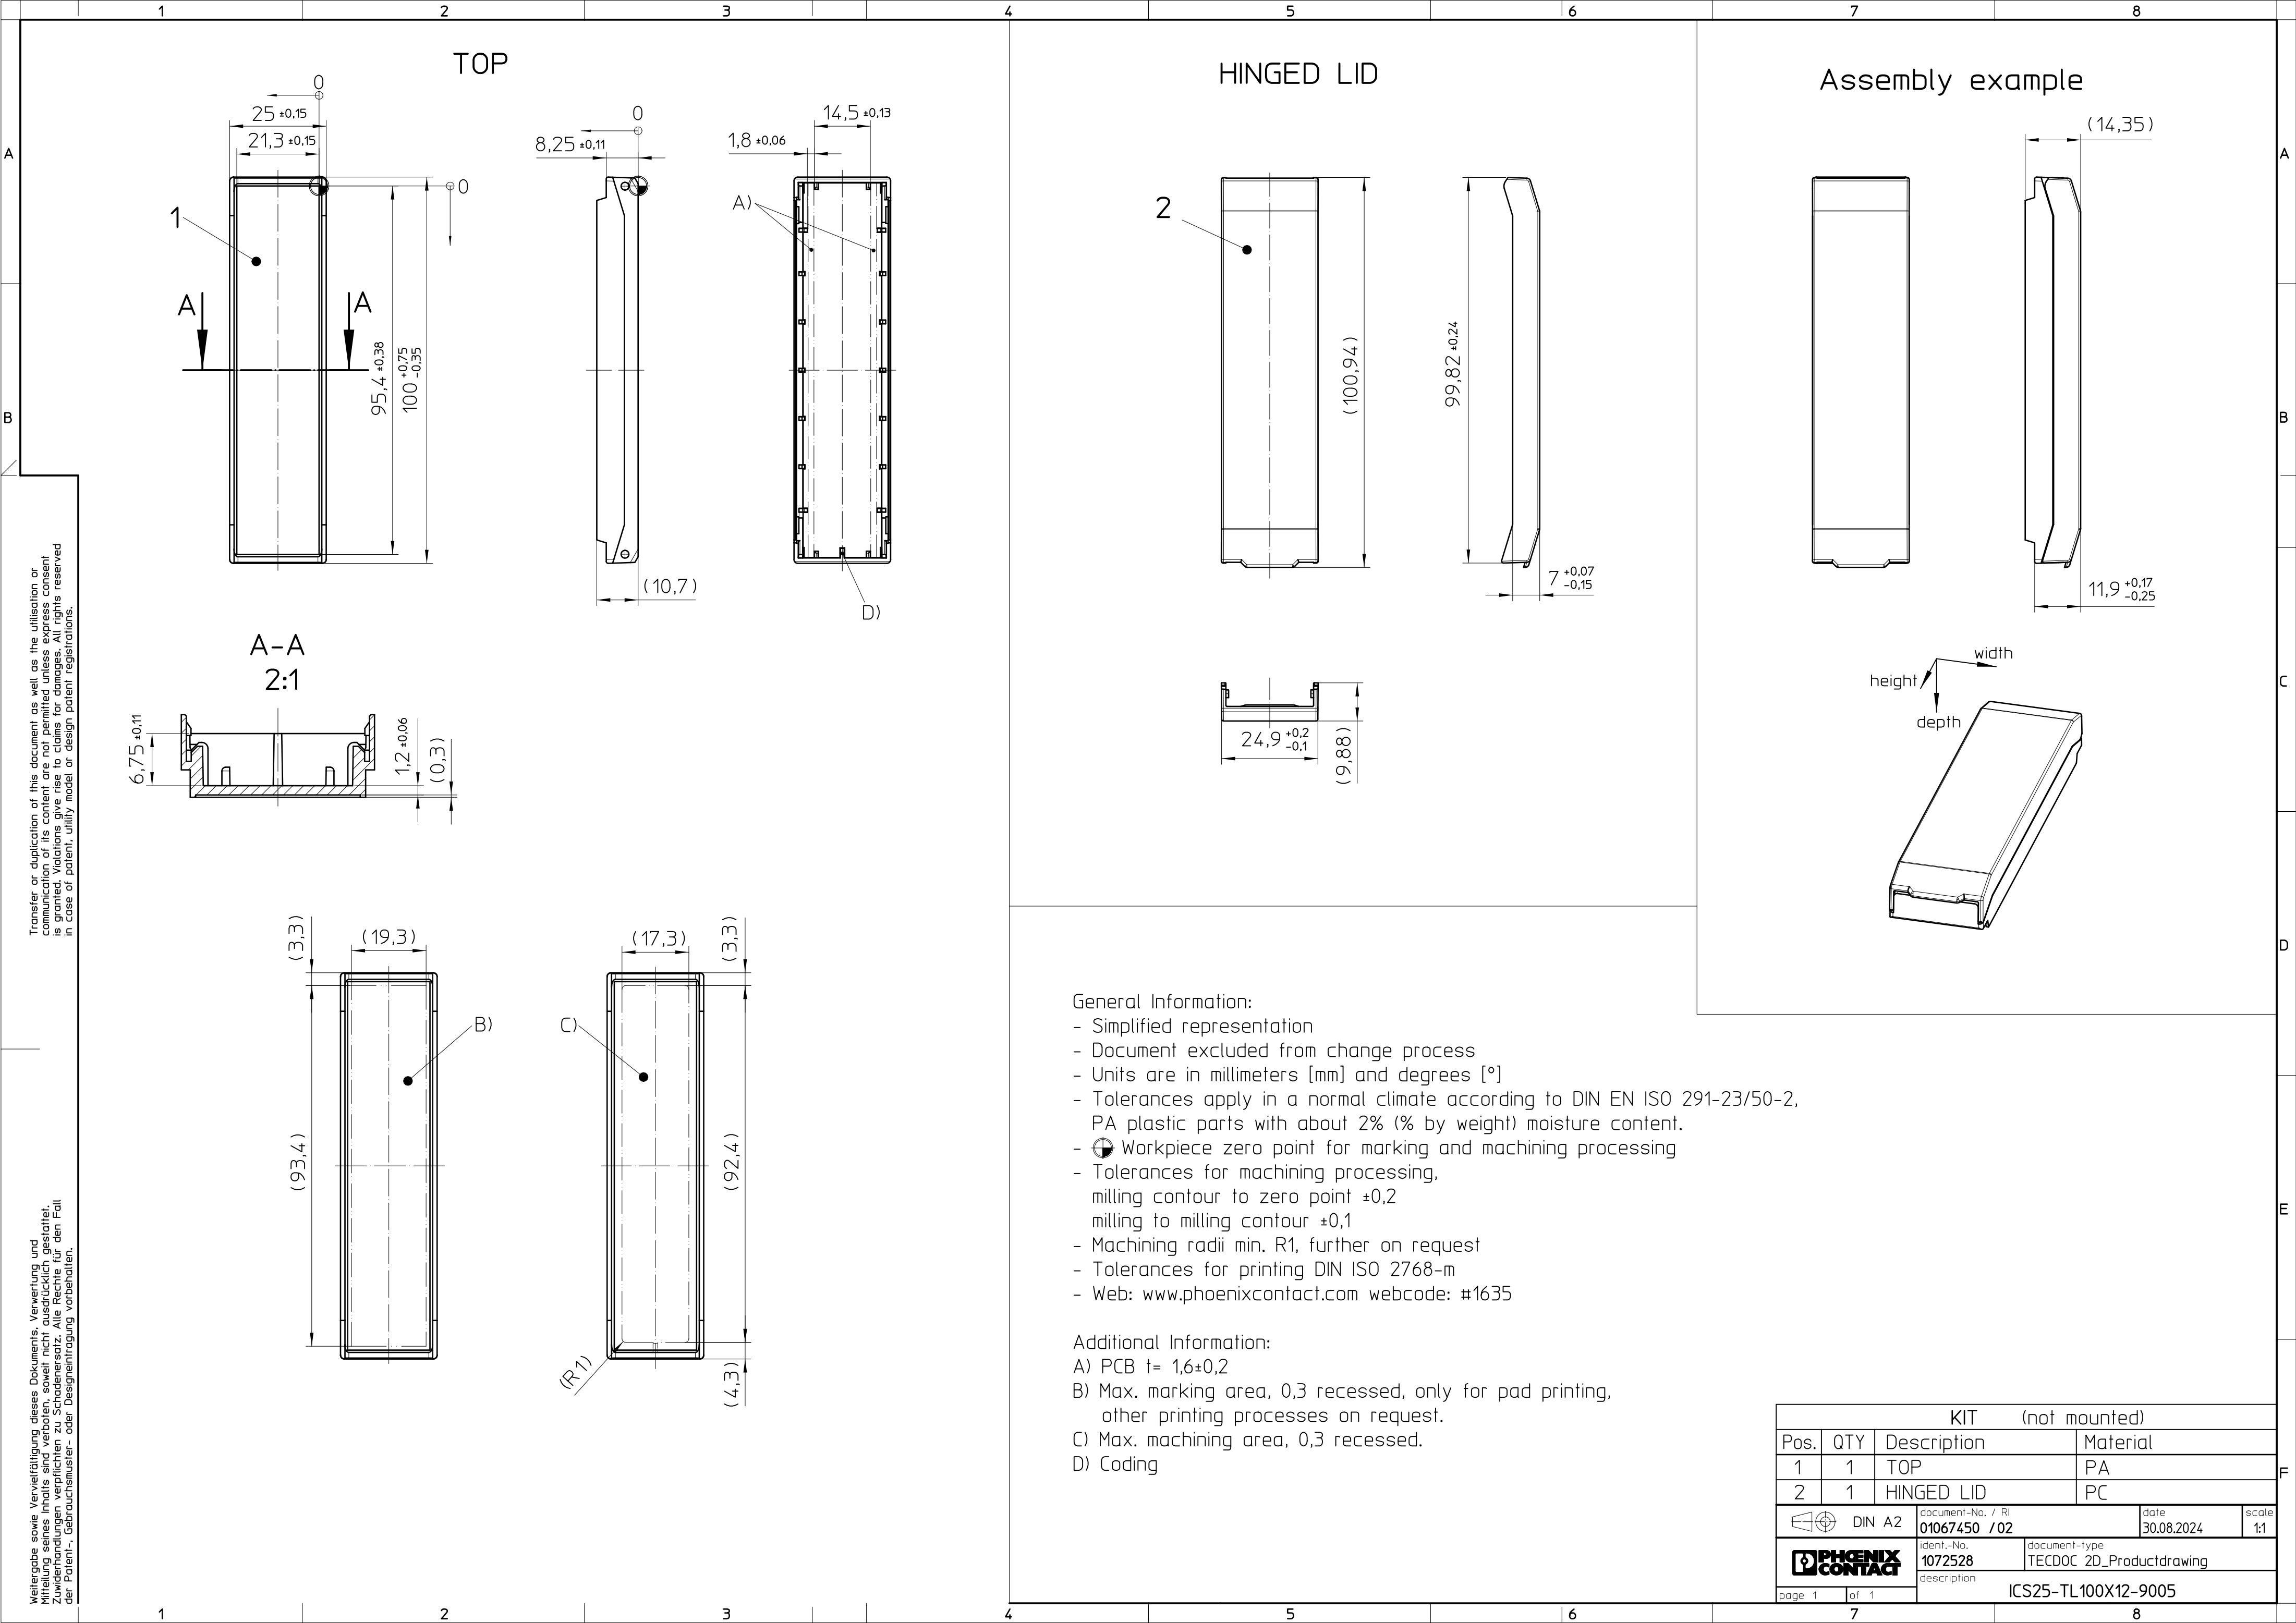

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

- General Information:
- Simplified representation
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for marking and machining processing
 - Tolerances for machining processing, milling contour to zero point ±0,2, milling to milling contour ±0,1
 - Machining radii min. R1, further on request
 - Tolerances for printing DIN ISO 2768-m
 - Web: www.phoenixcontact.com webcode: #1635

- Additional Information:
- A) PCB t= 1,6±0,2
 - B) Max. marking area, 0,3 recessed, only for pad printing, other printing processes on request.
 - C) Max. machining area, 0,3 recessed.
 - D) Coding

KIT (not mounted)					
Pos.	QTY	Description	Material		
1	1	TOP	PA		
2	1	HINGED LID	PC		
 DIN A2		document-No. / RI 01067450 / 02	date 30.08.2024	scale 1:1	
		ident.-No. 1072528	document-type TECDOC 2D_Productdrawing		
		description			
		ICS25-TL100X12-9005			
page 1 of 1					