

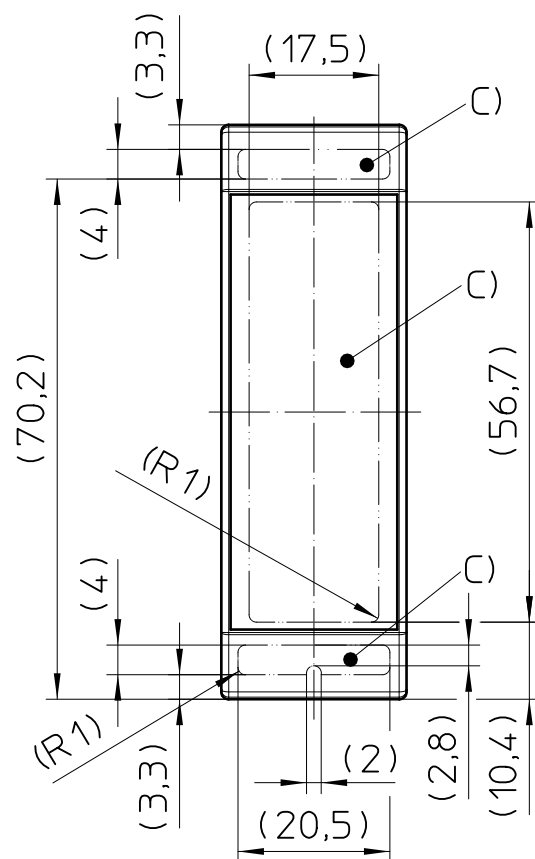
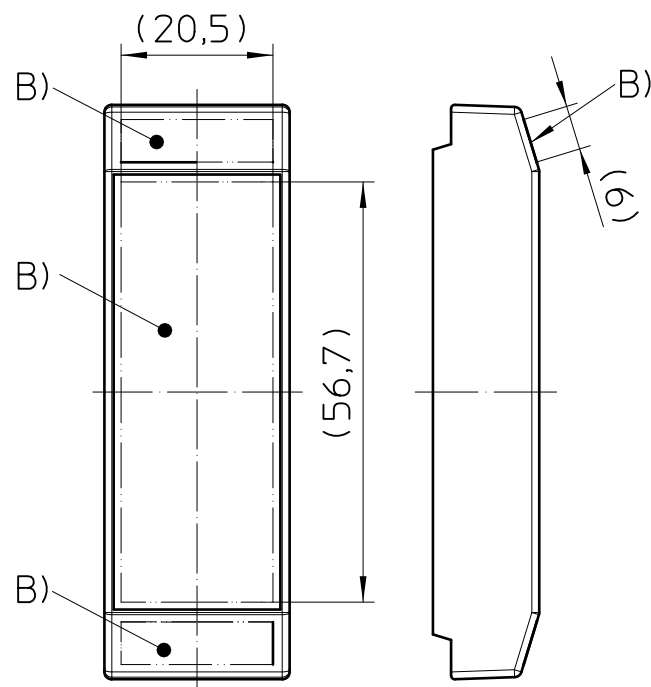
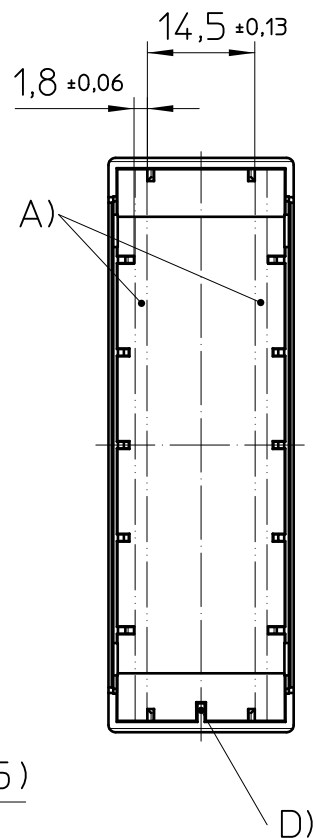
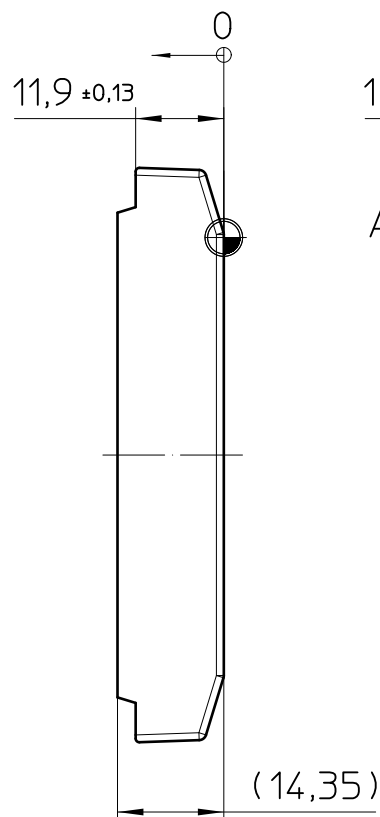
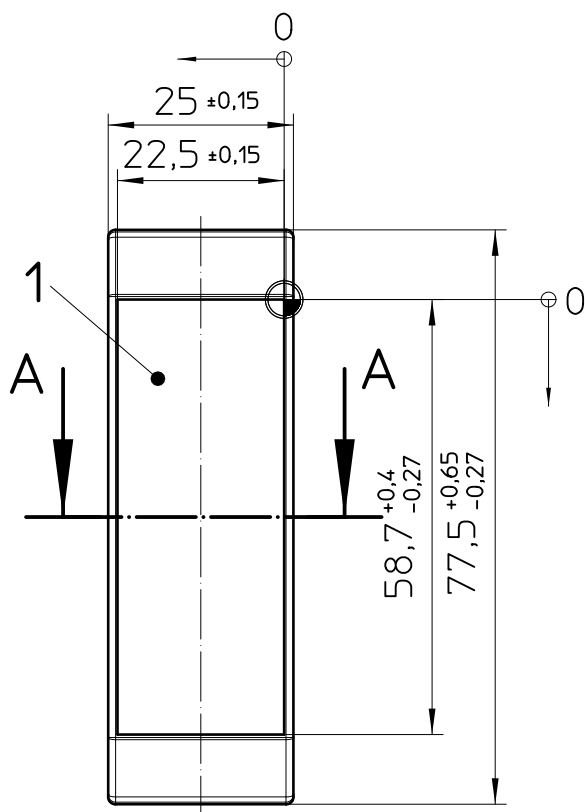


COVER

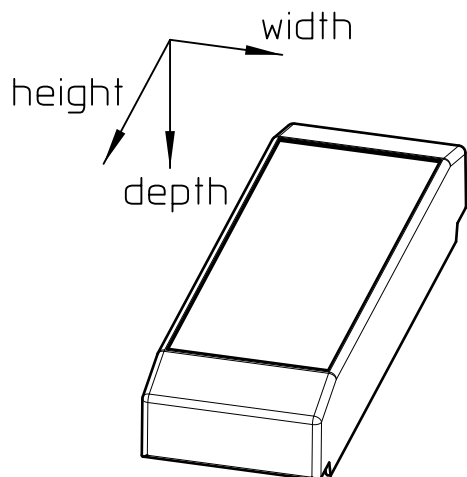

A-A 2:1

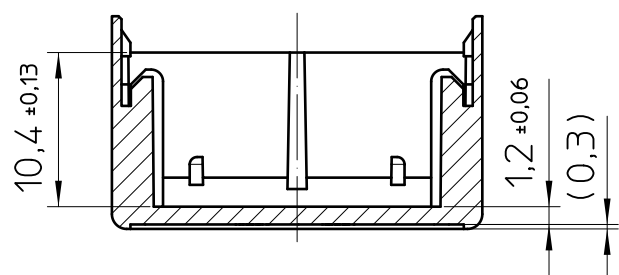

General Information:

- Simplified representation
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Workpiece zero point for marking and machining processing
- Tolerances for machining processing,
 - milling contour to zero point ±0,2
 - milling to milling contour ±0,1
- Machining radii min. R1, further on request
- Tolerances for printing DIN ISO 2768-m
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:

- A) PCB $t = 1,6 \pm 0,2$
- B) Max. marking area, 0,3 recessed, only for pad printing, other printing processes on request.
- C) Max. machining area, 0,3 recessed.
- D) Coding

Pos.	QTY	Description	Material
1	1	COVER	PA

 DIN A3		document-no. / ri 01071080 / 02		article-no. 1072559	scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 02.04.2025	document-type TECDOC 2D_Productdrawing			
page 1 of 1		description ICS25-C77X12-9005				