




Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Verbreitung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

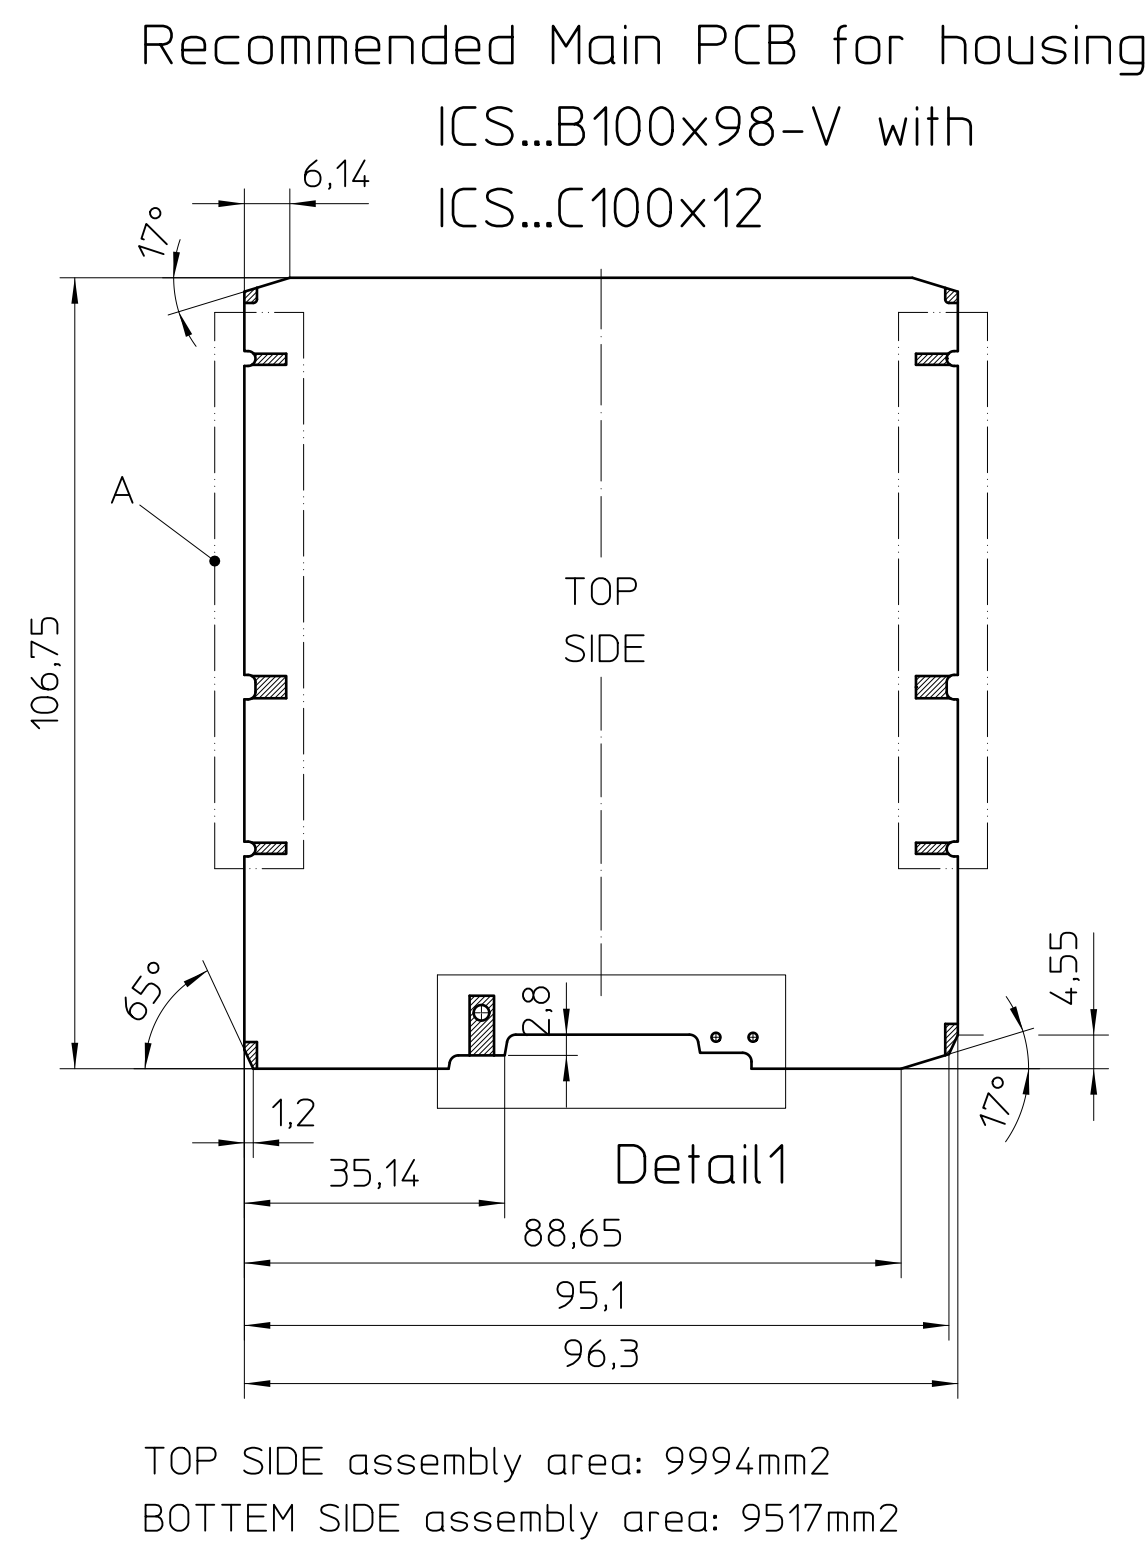


TOP SIDE assembly area: 9994mm²
BOTTEM SIDE assembly area: 9517mm²

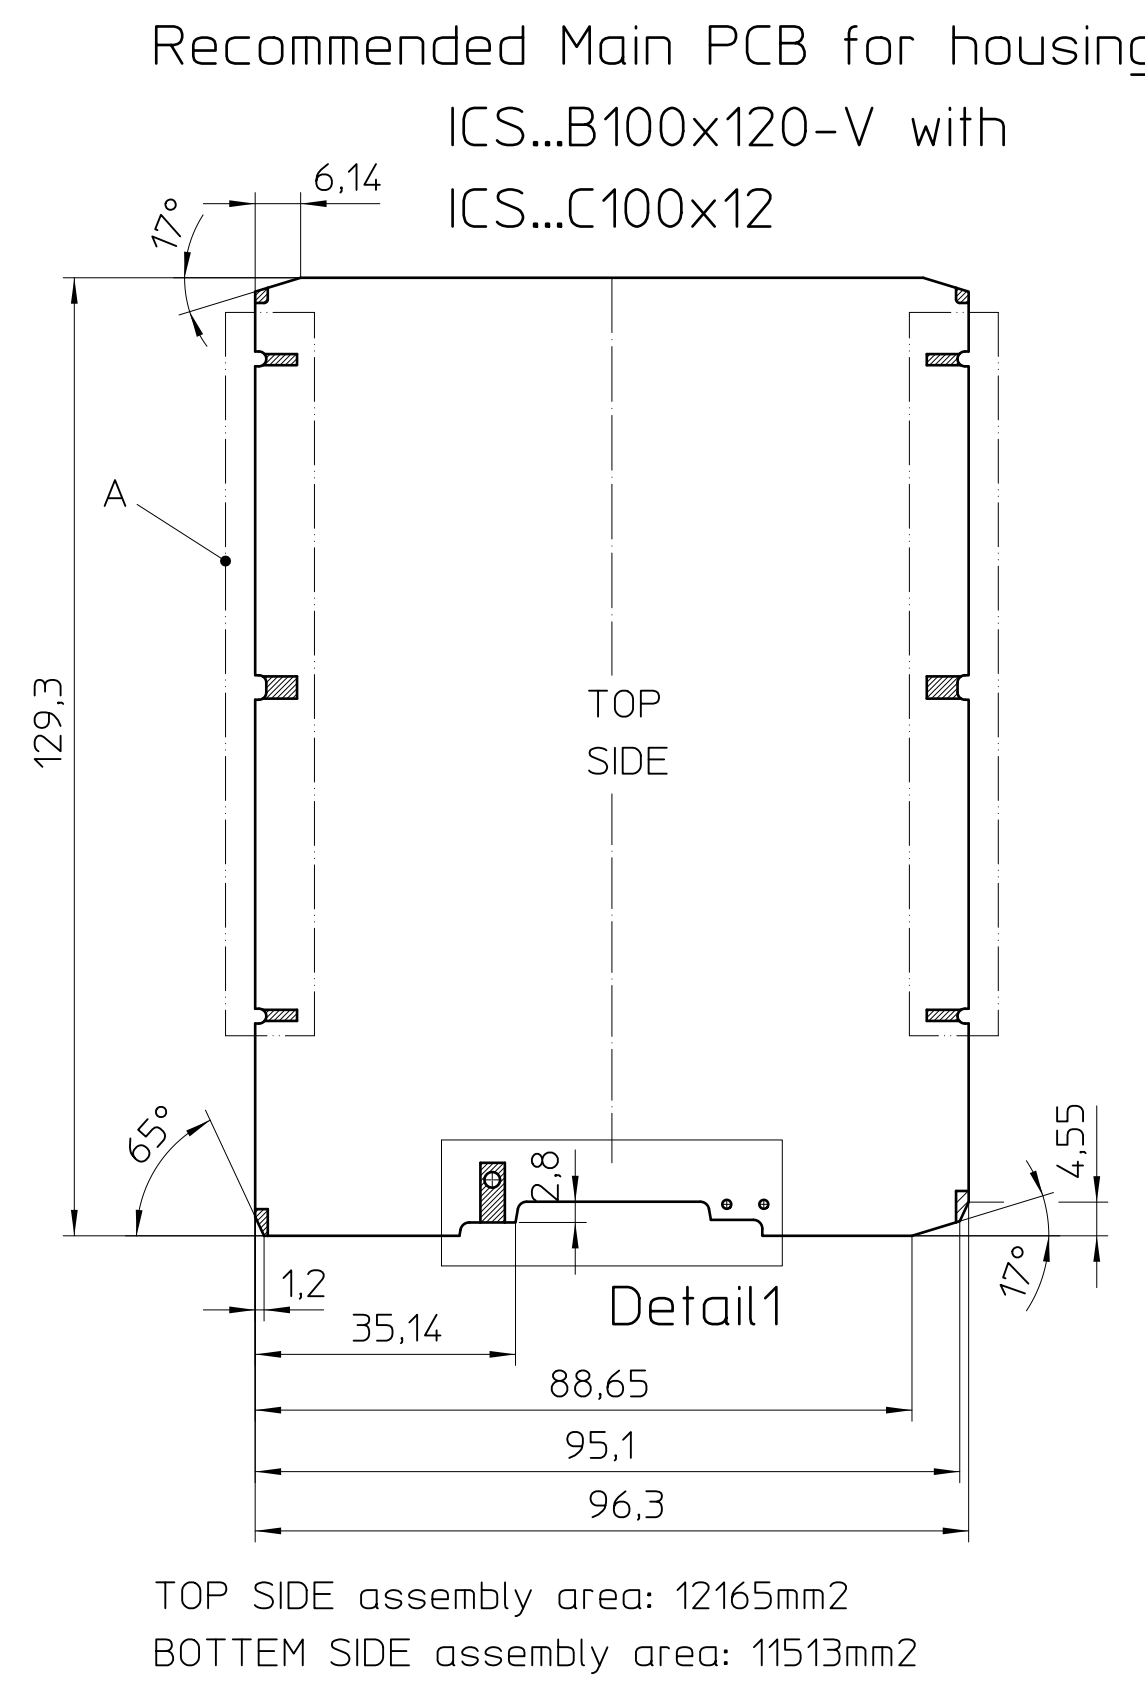

TOP SIDE assembly area: 12165mm²
BOTTEM SIDE assembly area: 11513mm²

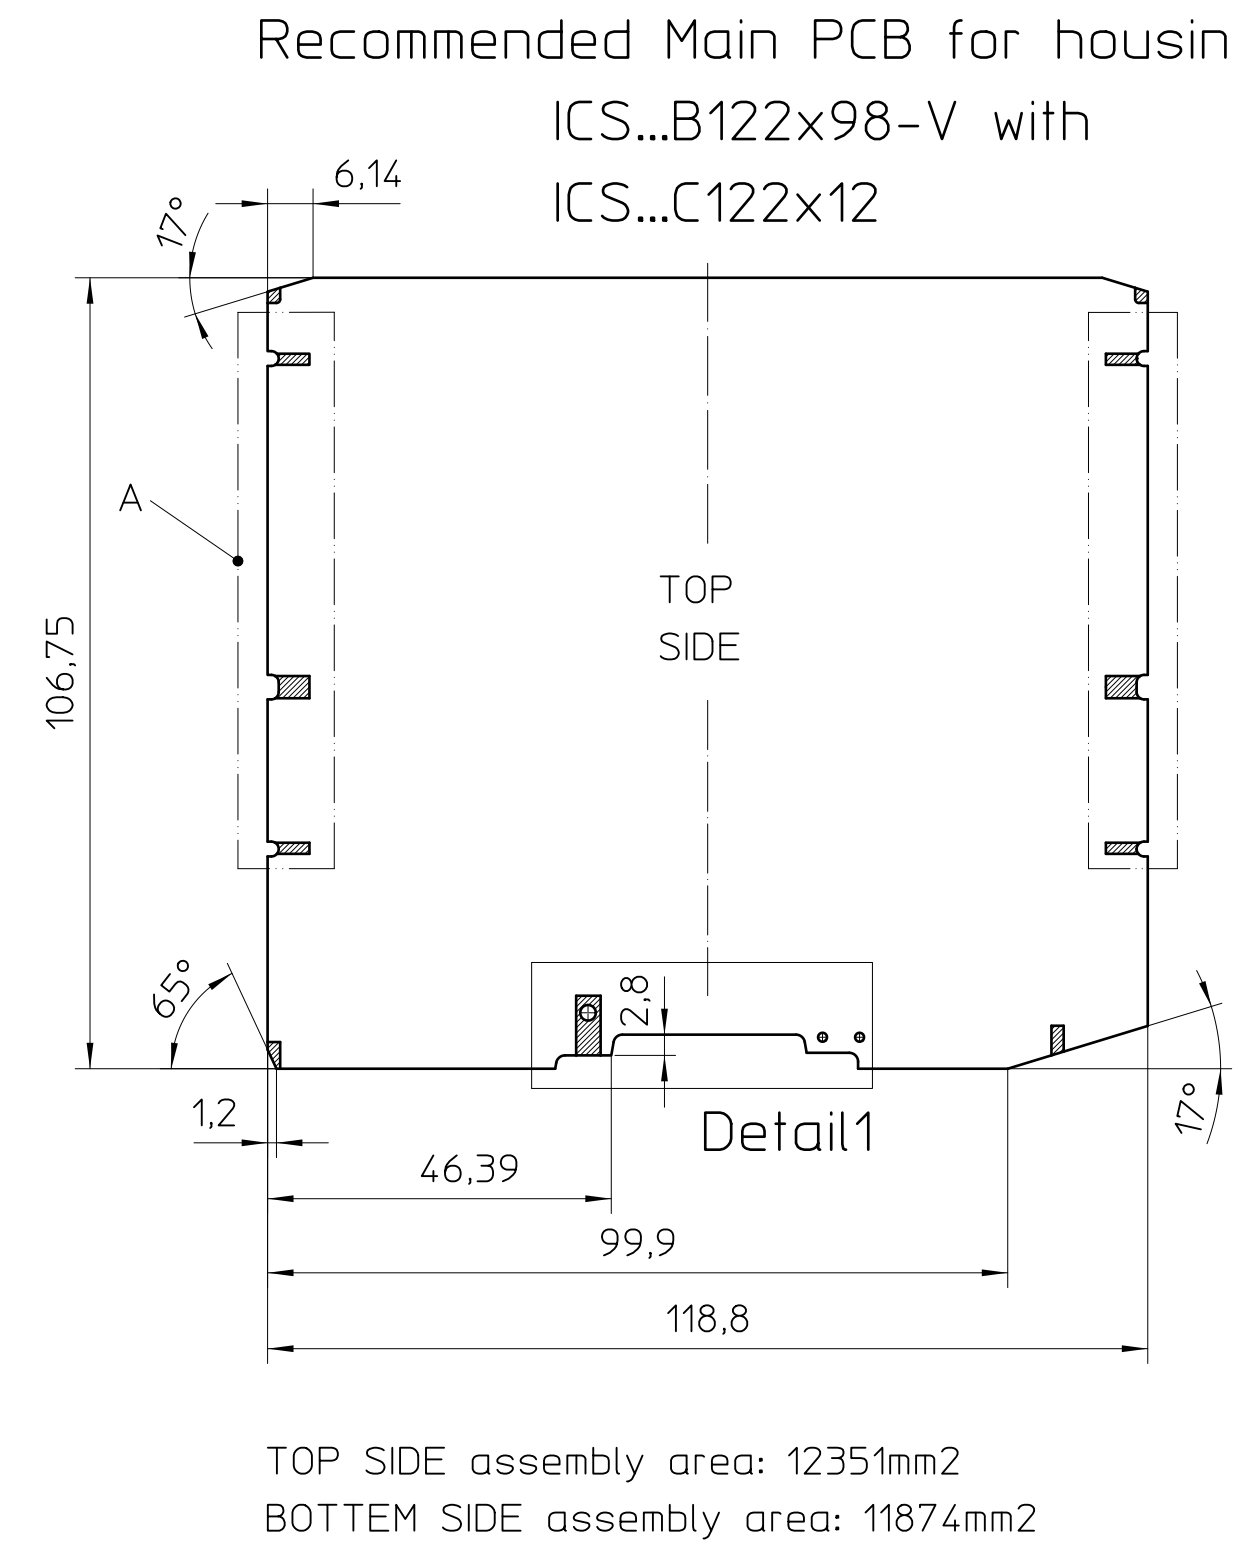


TOP SIDE assembly area: 12351mm²
BOTTEM SIDE assembly area: 11874mm²

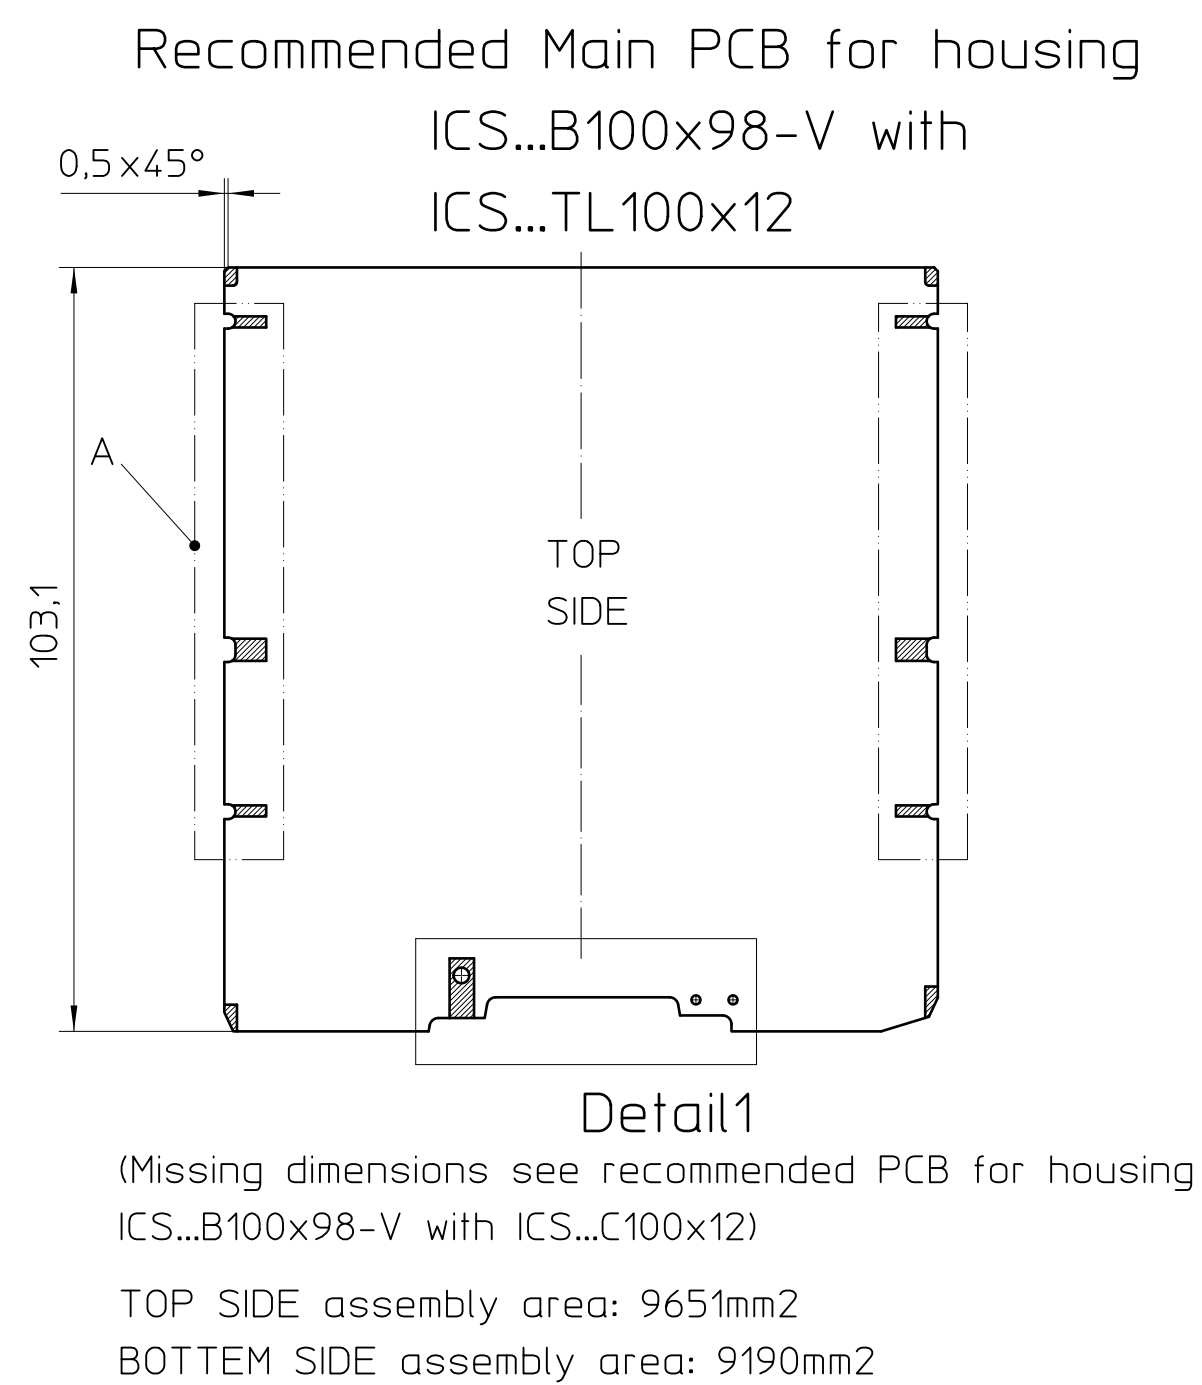


(Missing dimensions see recommended PCB for housing
ICS...B100x98-V with ICS...C100x12)

TOP SIDE assembly area: 9651mm²
BOTTEM SIDE assembly area: 9190mm²

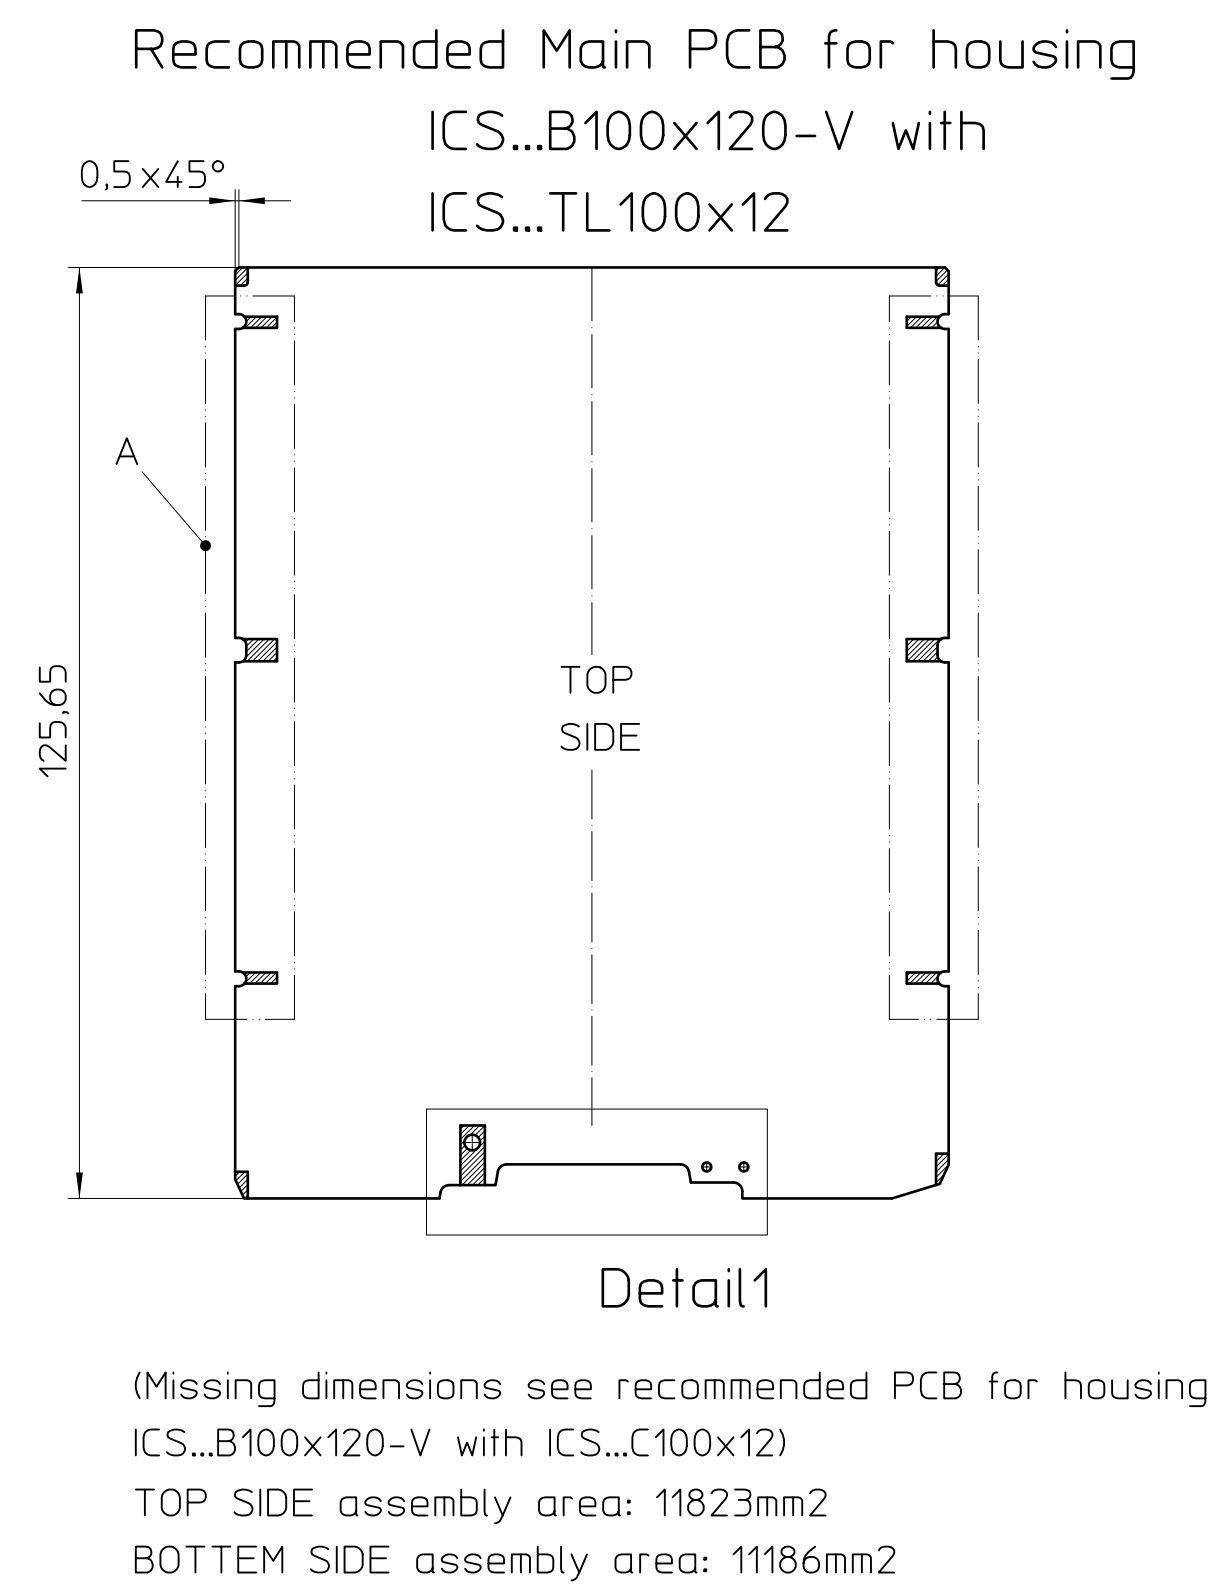


(Missing dimensions see recommended PCB for housing
ICS...B100x120-V with ICS...C100x12)

TOP SIDE assembly area: 11823mm²
BOTTEM SIDE assembly area: 11186mm²

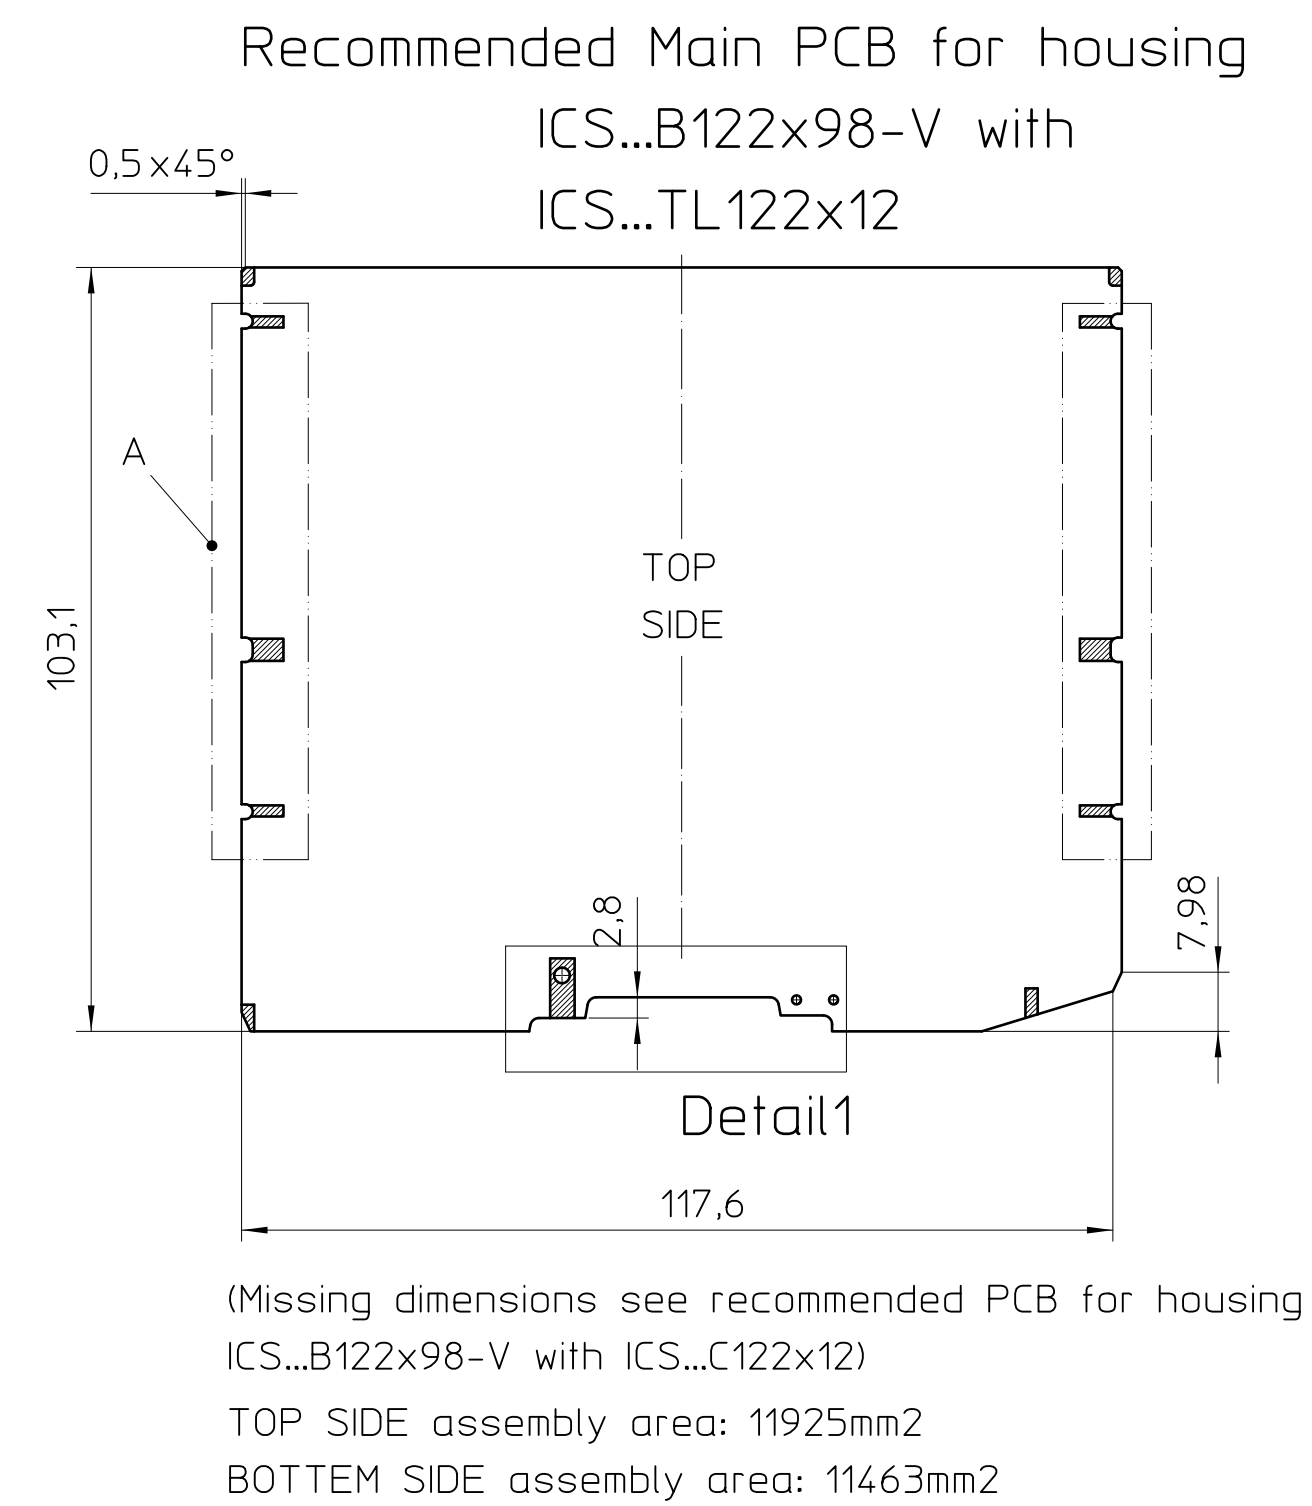

(Missing dimensions see recommended PCB for housing
ICS...B122x98-V with ICS...C122x12)
TOP SIDE assembly area: 11925mm²
BOTTEM SIDE assembly area: 11463mm²

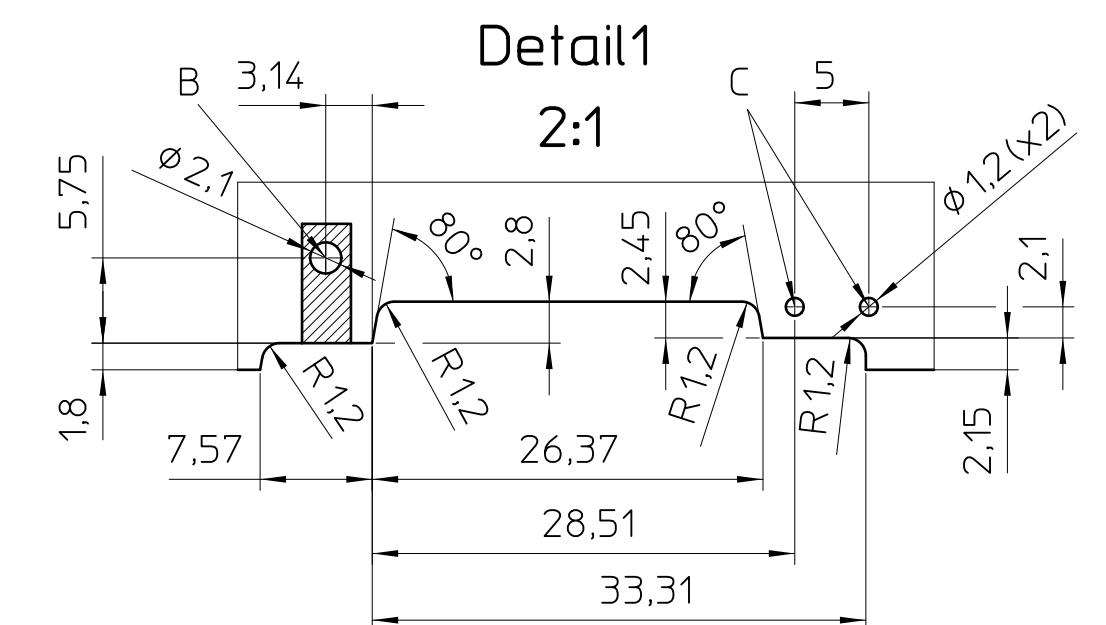

General Information:

- Recommended PCB
- Simplified representation
- Document excluded from change process
- CAD data see download-center on www.phoenixcontact.com
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Tolerances for PCB:
 dimensions ≤ 30 : $\pm 0,10$ / $R \pm 0,2$ / $\pm 1^\circ$
 dimensions > 30 : $\pm 0,15$ / $R \pm 0,2$ / $\pm 1^\circ$
 symmetry: 0,2
- Thickness PCB: $t = 1,6 \pm 0,2$
-  Restricted area, no components

Additional Information

A) Variable area for connection technology or filler ICS...-F...

B) Hole for snap fit

C) Hole for ICS-FE-CONTACT

	DIN A1	document-No. / Ri	date	scale
		01979794 / 06	12.06.2025	1:1
		ident-No.	document-type	
		1076880	TECD0C_2D_PCB-Outline	
		description	ICS50-B122X98-V-V-9005	
page: 1	of: 1			