
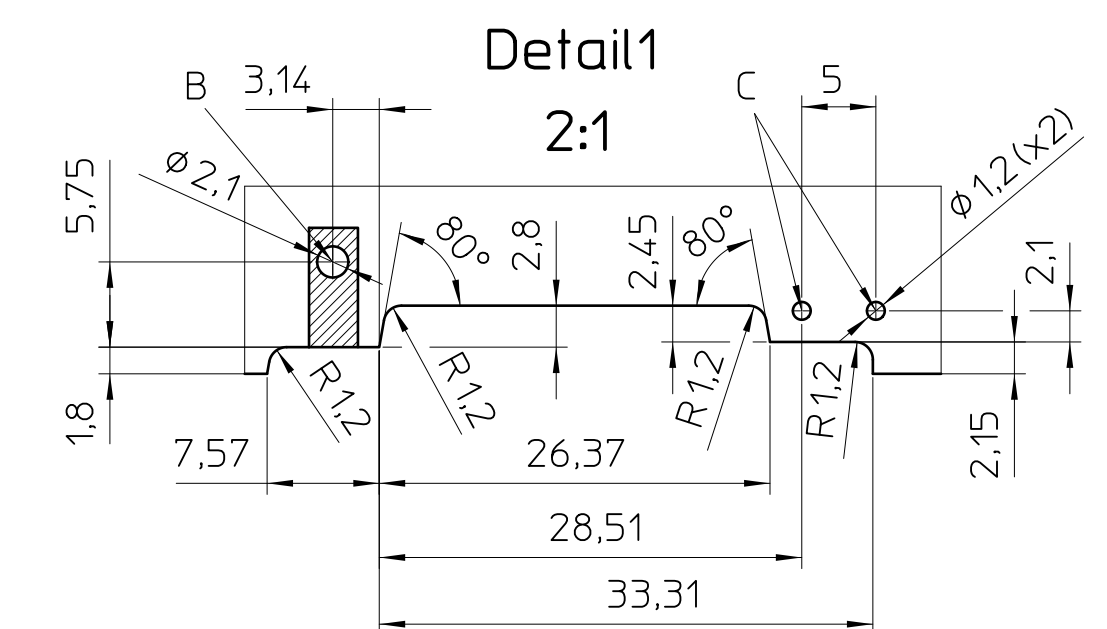
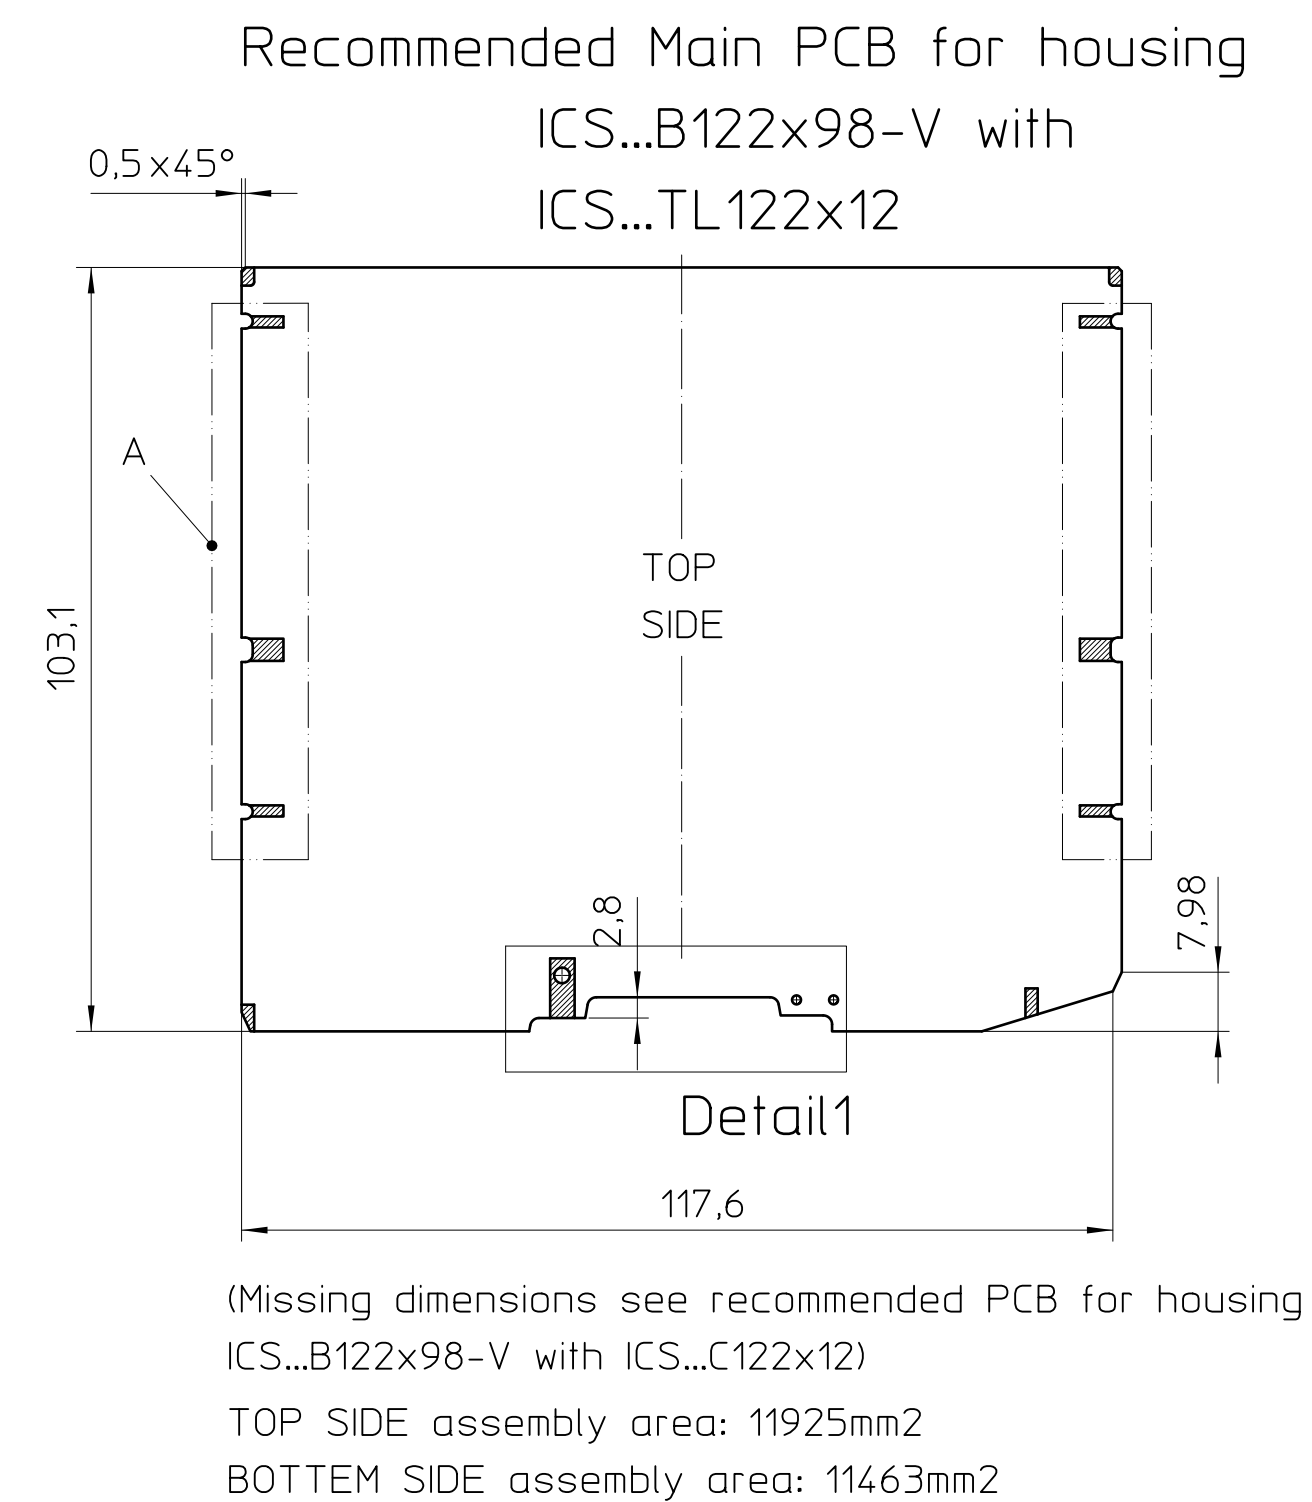
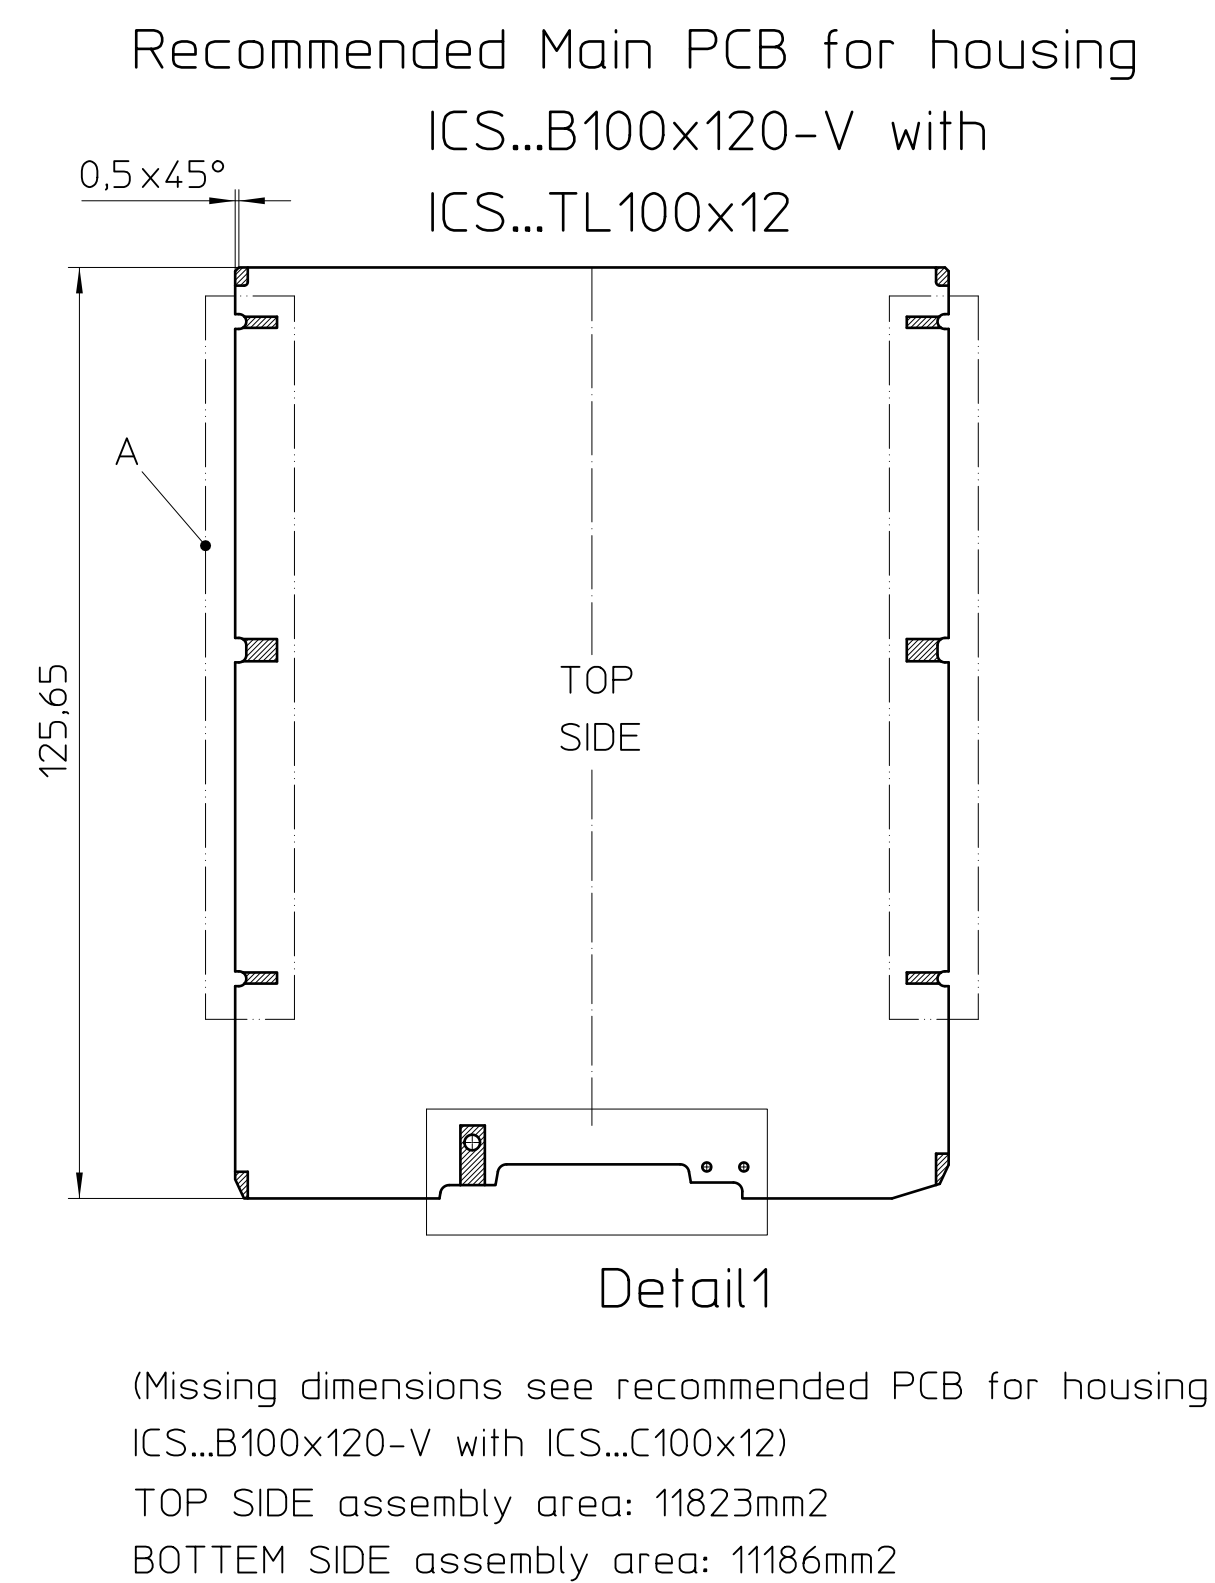
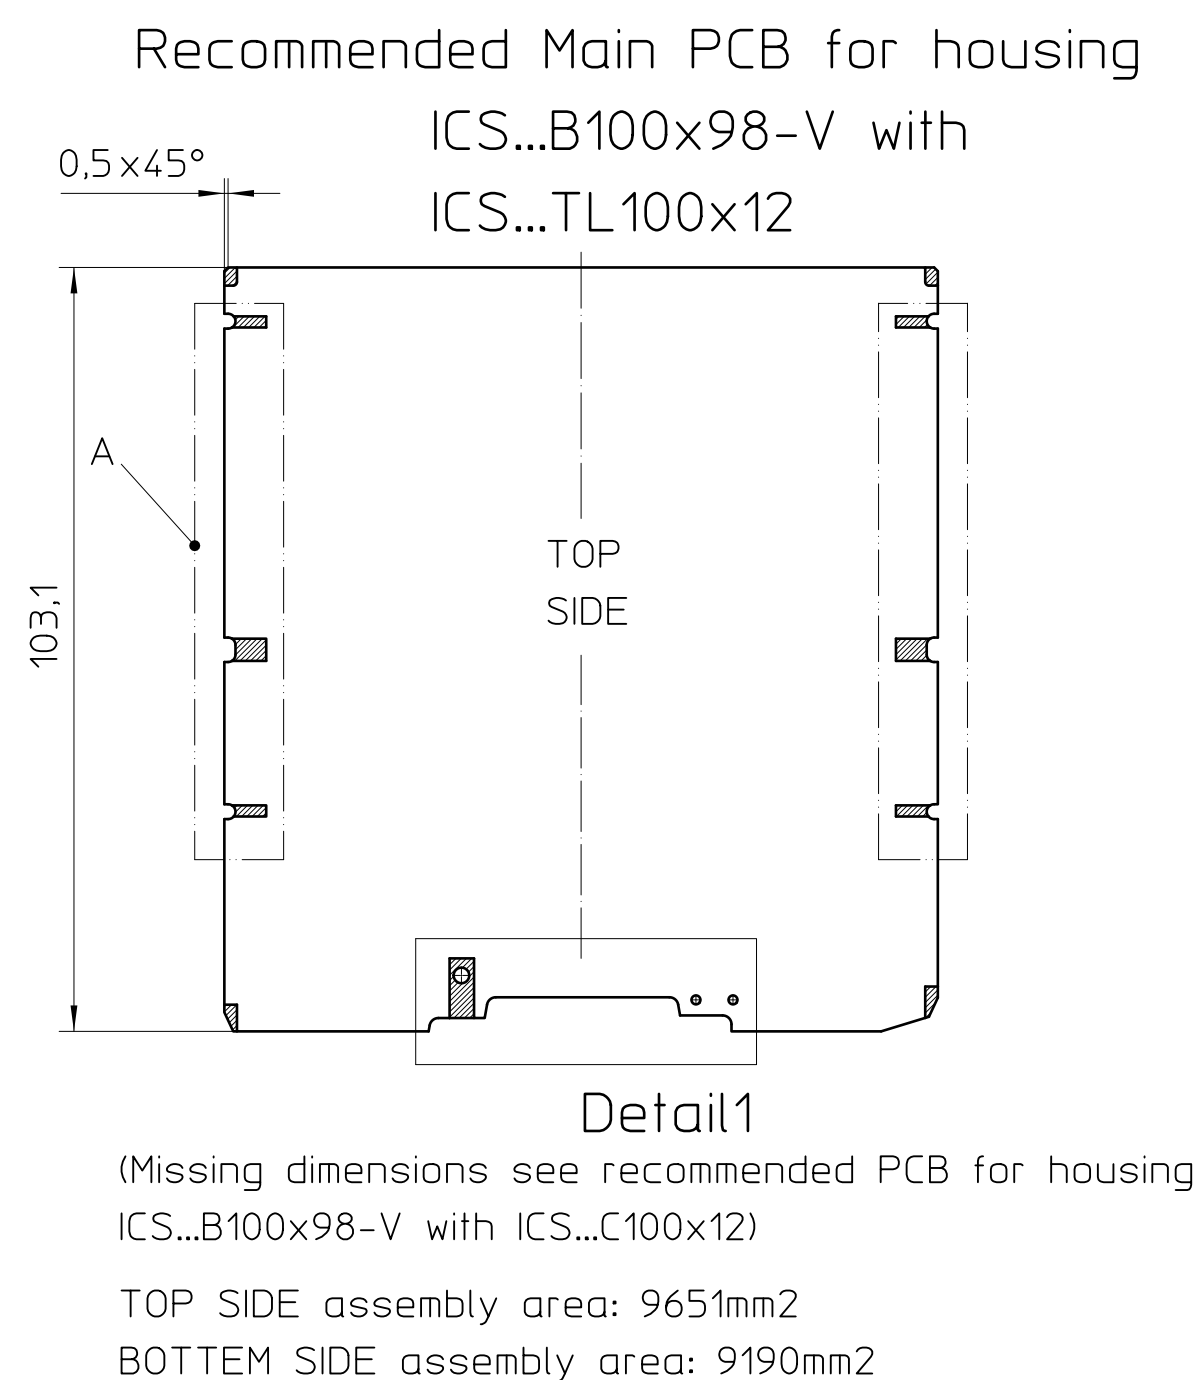
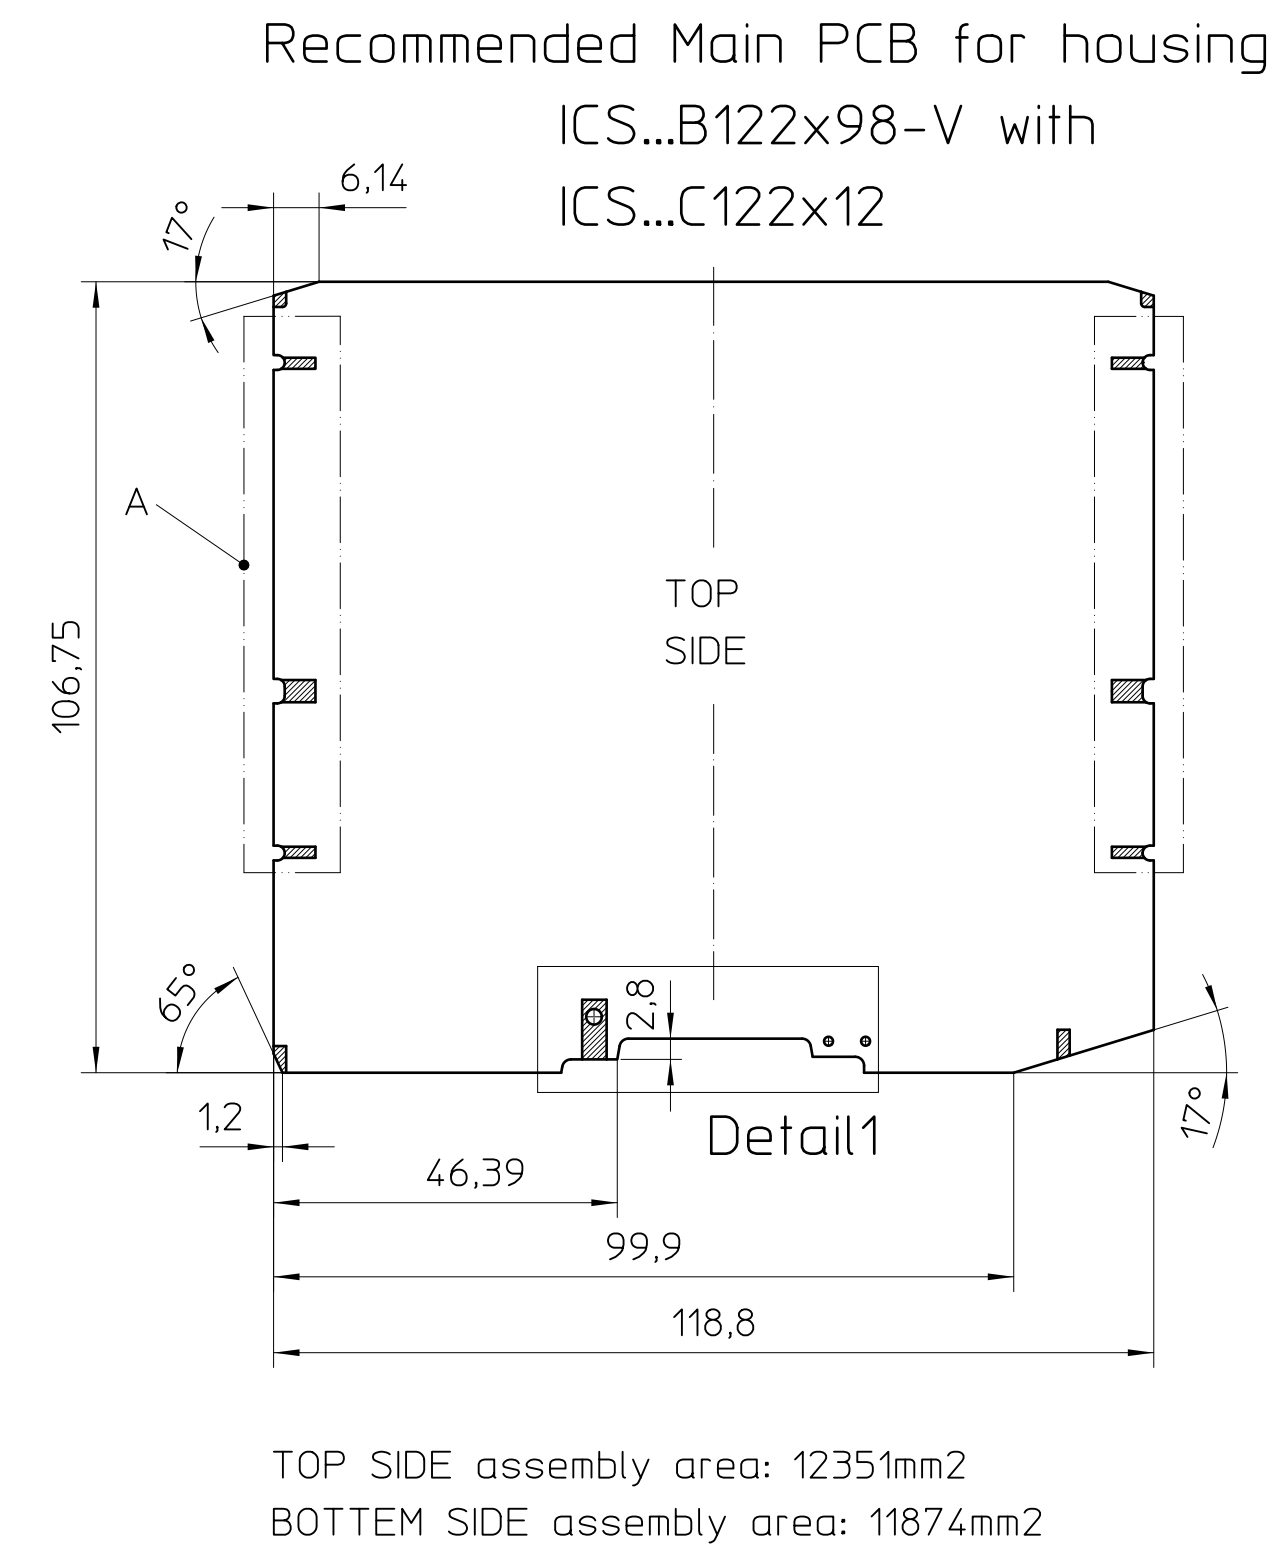
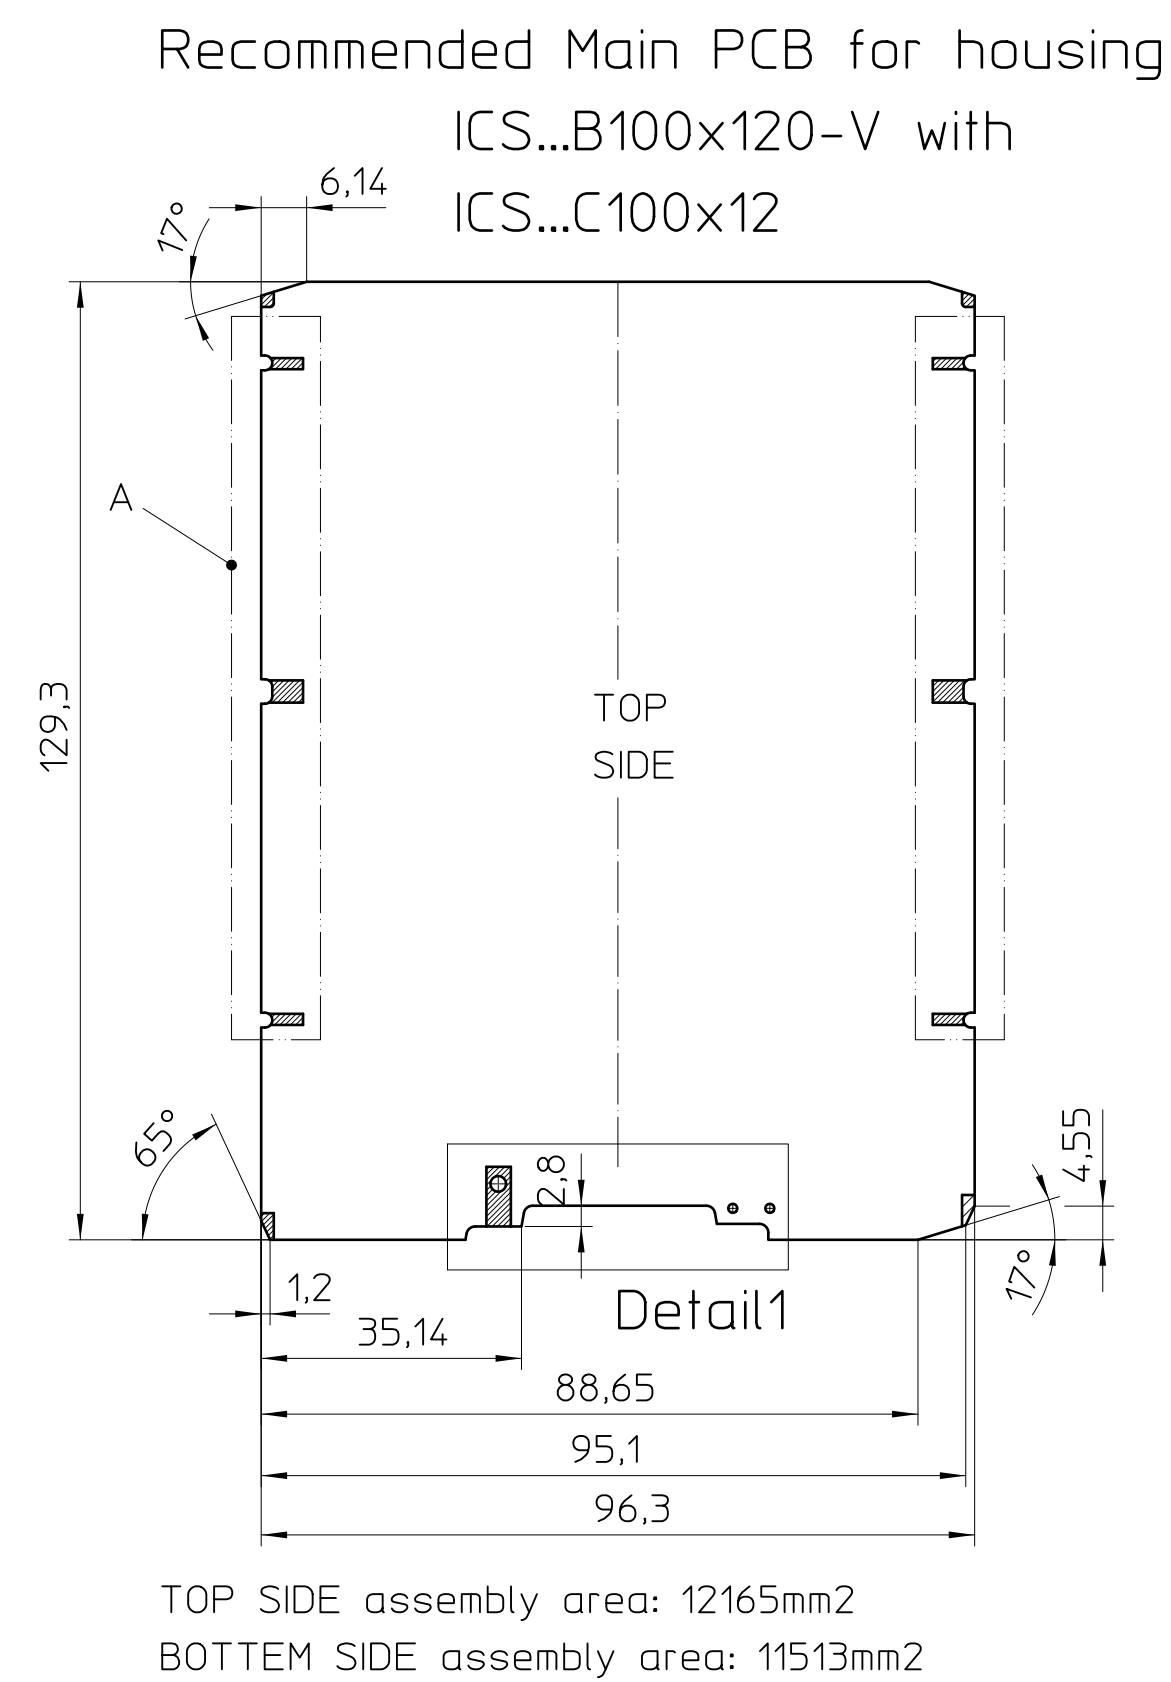


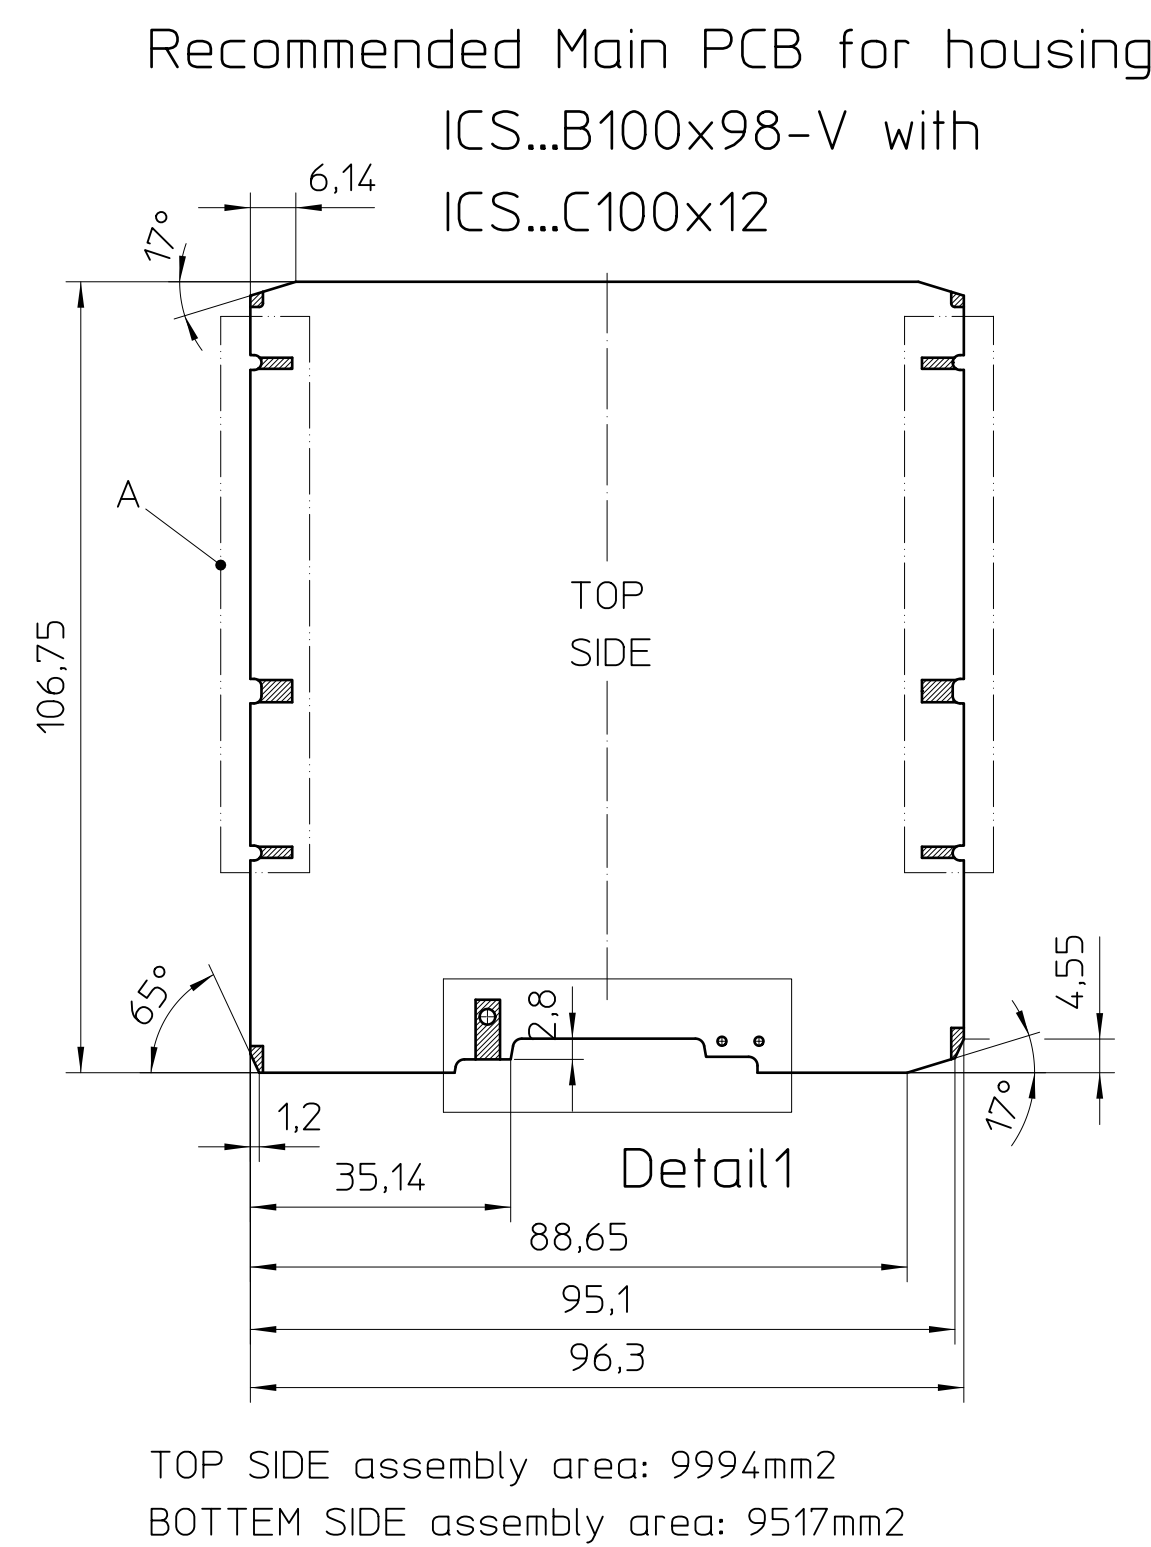

- General Information:
 - Recommended PCB
 - Simplified representation
 - Document excluded from change process
 - CAD data see download-center on www.phoenixcontact.com
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
 - Tolerances for PCB:
 - dimensions ≤ 30 : $\pm 0,10$ / $R \pm 0,2$ / $\pm 1^\circ$
 - dimensions > 30 : $\pm 0,15$ / $R \pm 0,2$ / $\pm 1^\circ$
 - symmetry: 0,2
 - Thickness PCB: $t = 1,6 \pm 0,2$
 -  Restricted area, no components

Additional Information

A) Variable area for connection technology or filler ICS...-F...

B) Hole for snap fit

C) Hole for ICS-FE-CONTACT