




Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Verbreitung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

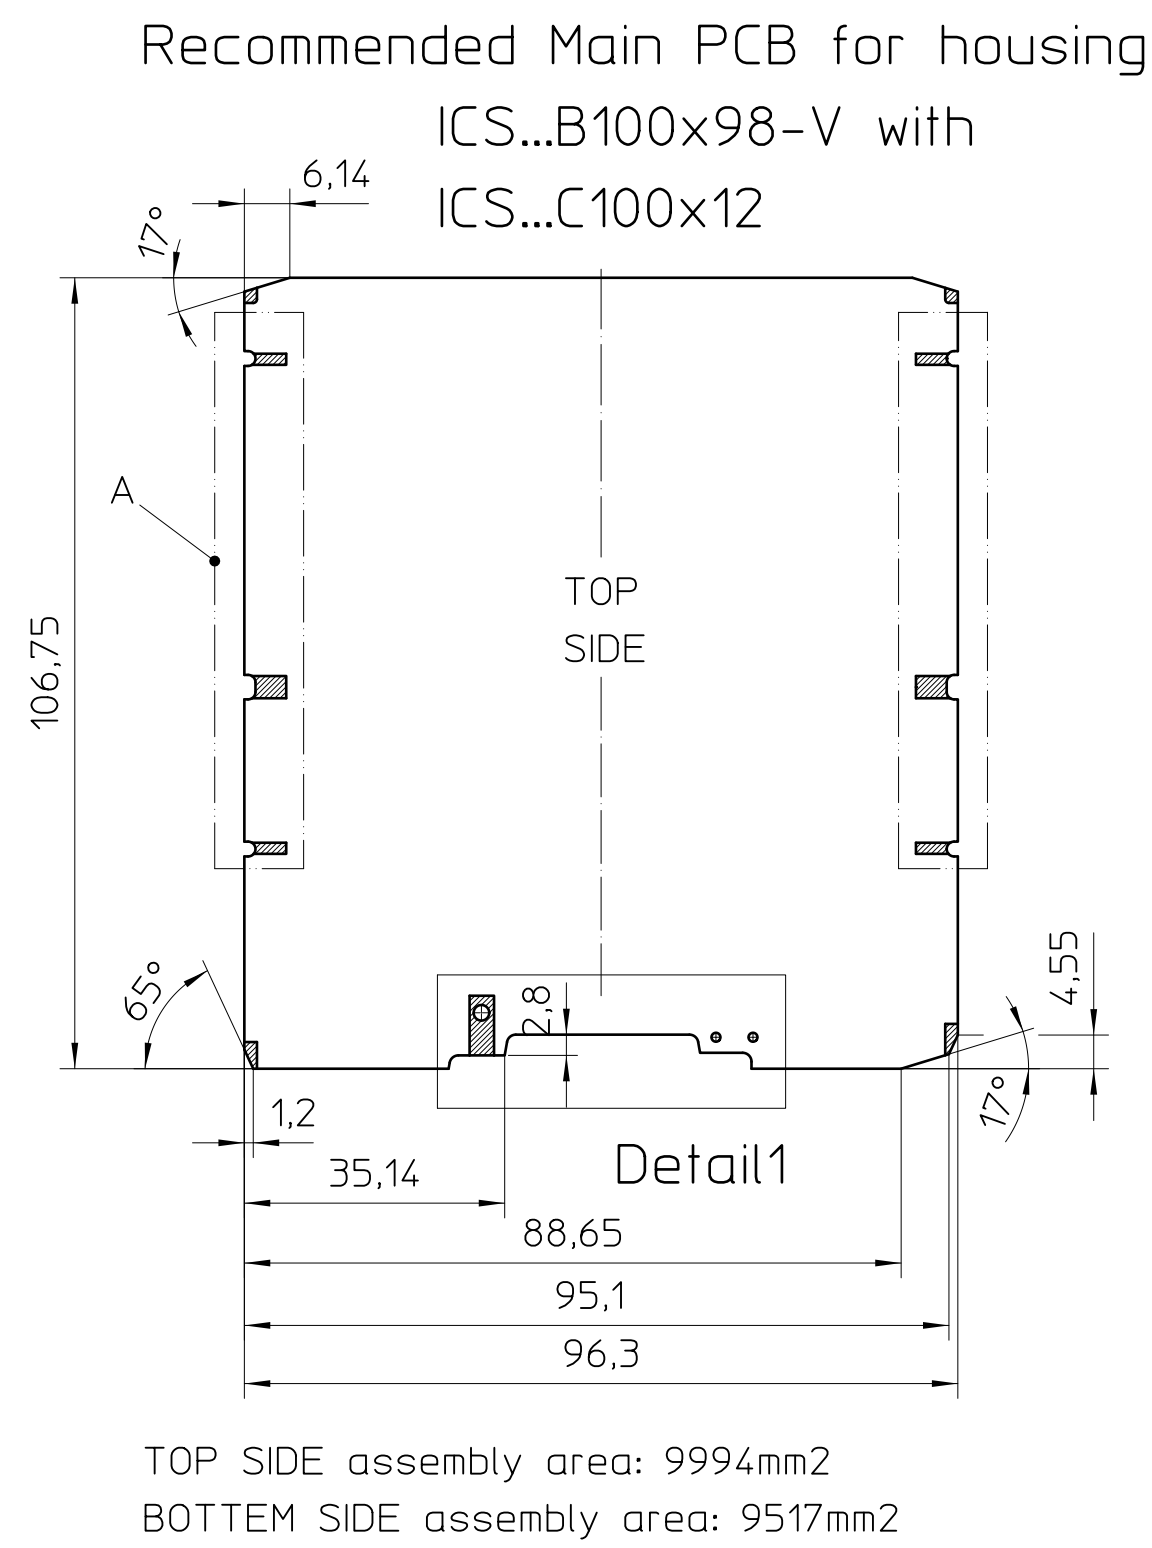


TOP SIDE assembly area: 9994mm2
BOTTEM SIDE assembly area: 9517mm2

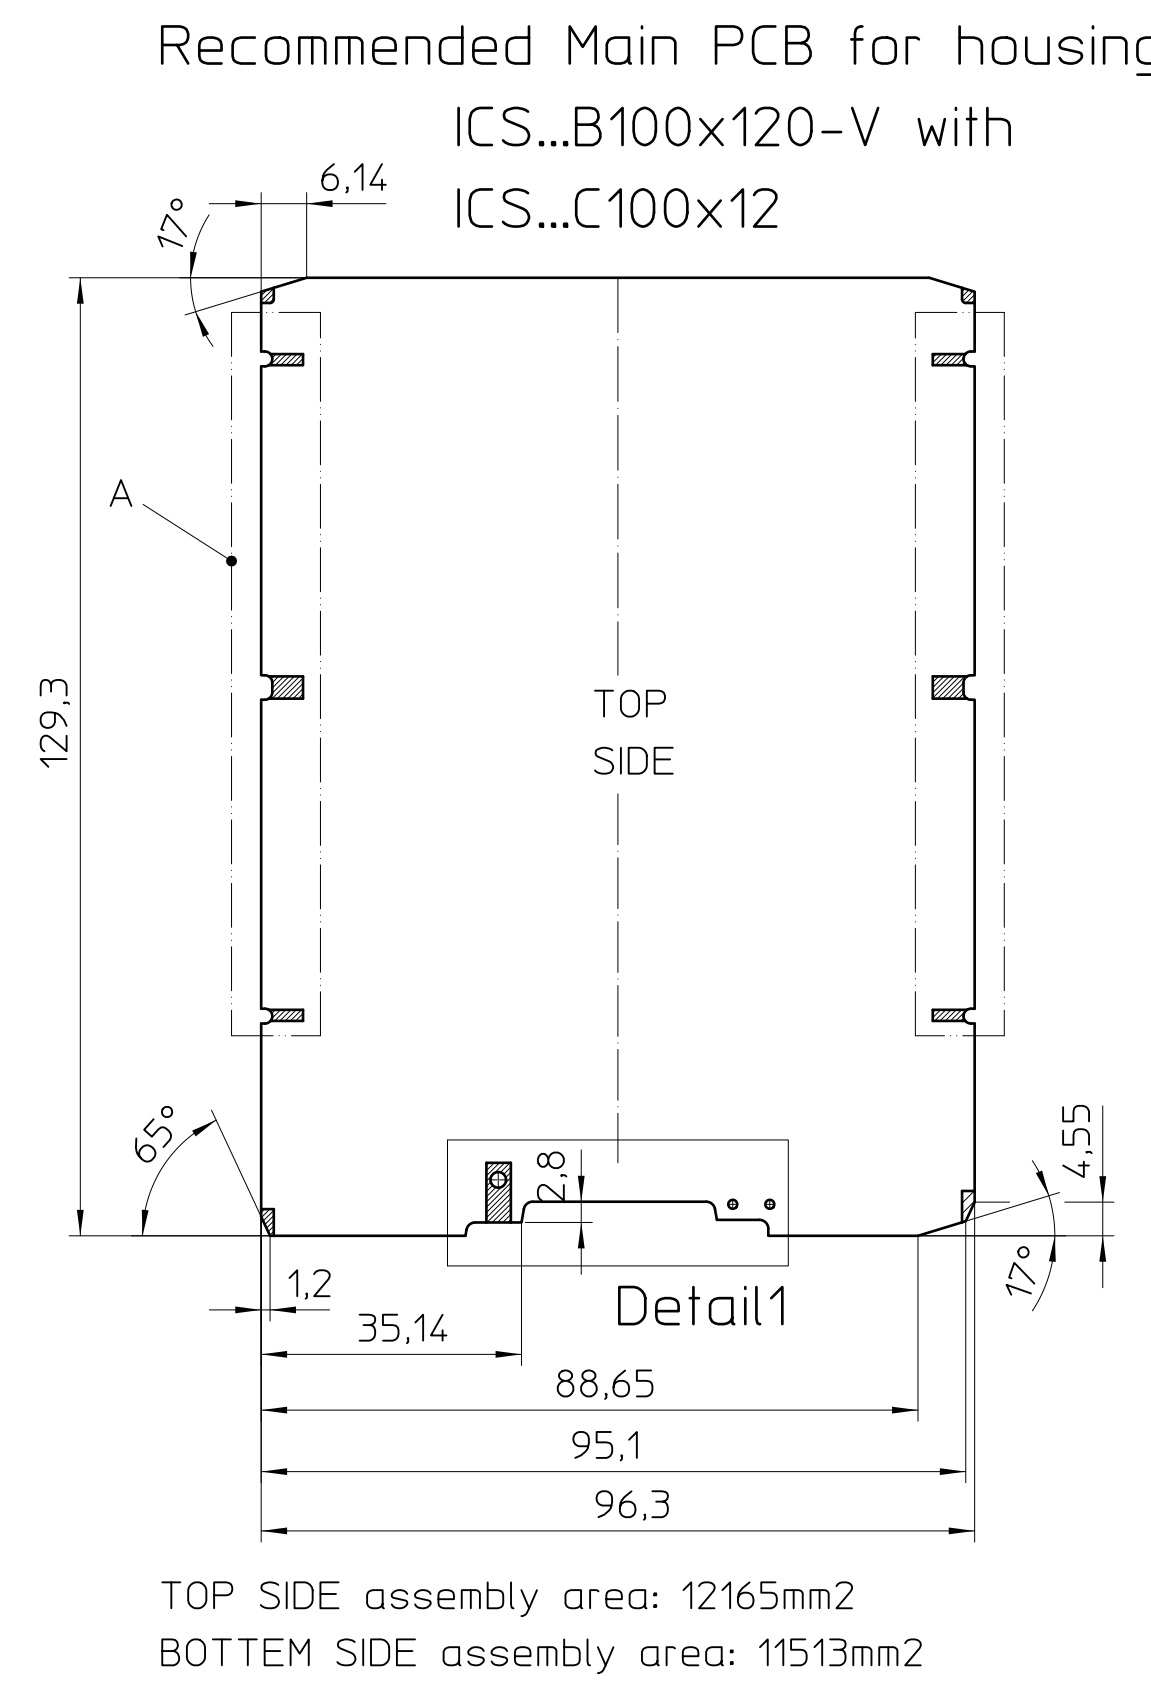

TOP SIDE assembly area: 12165mm²
BOTTEM SIDE assembly area: 11513mm²

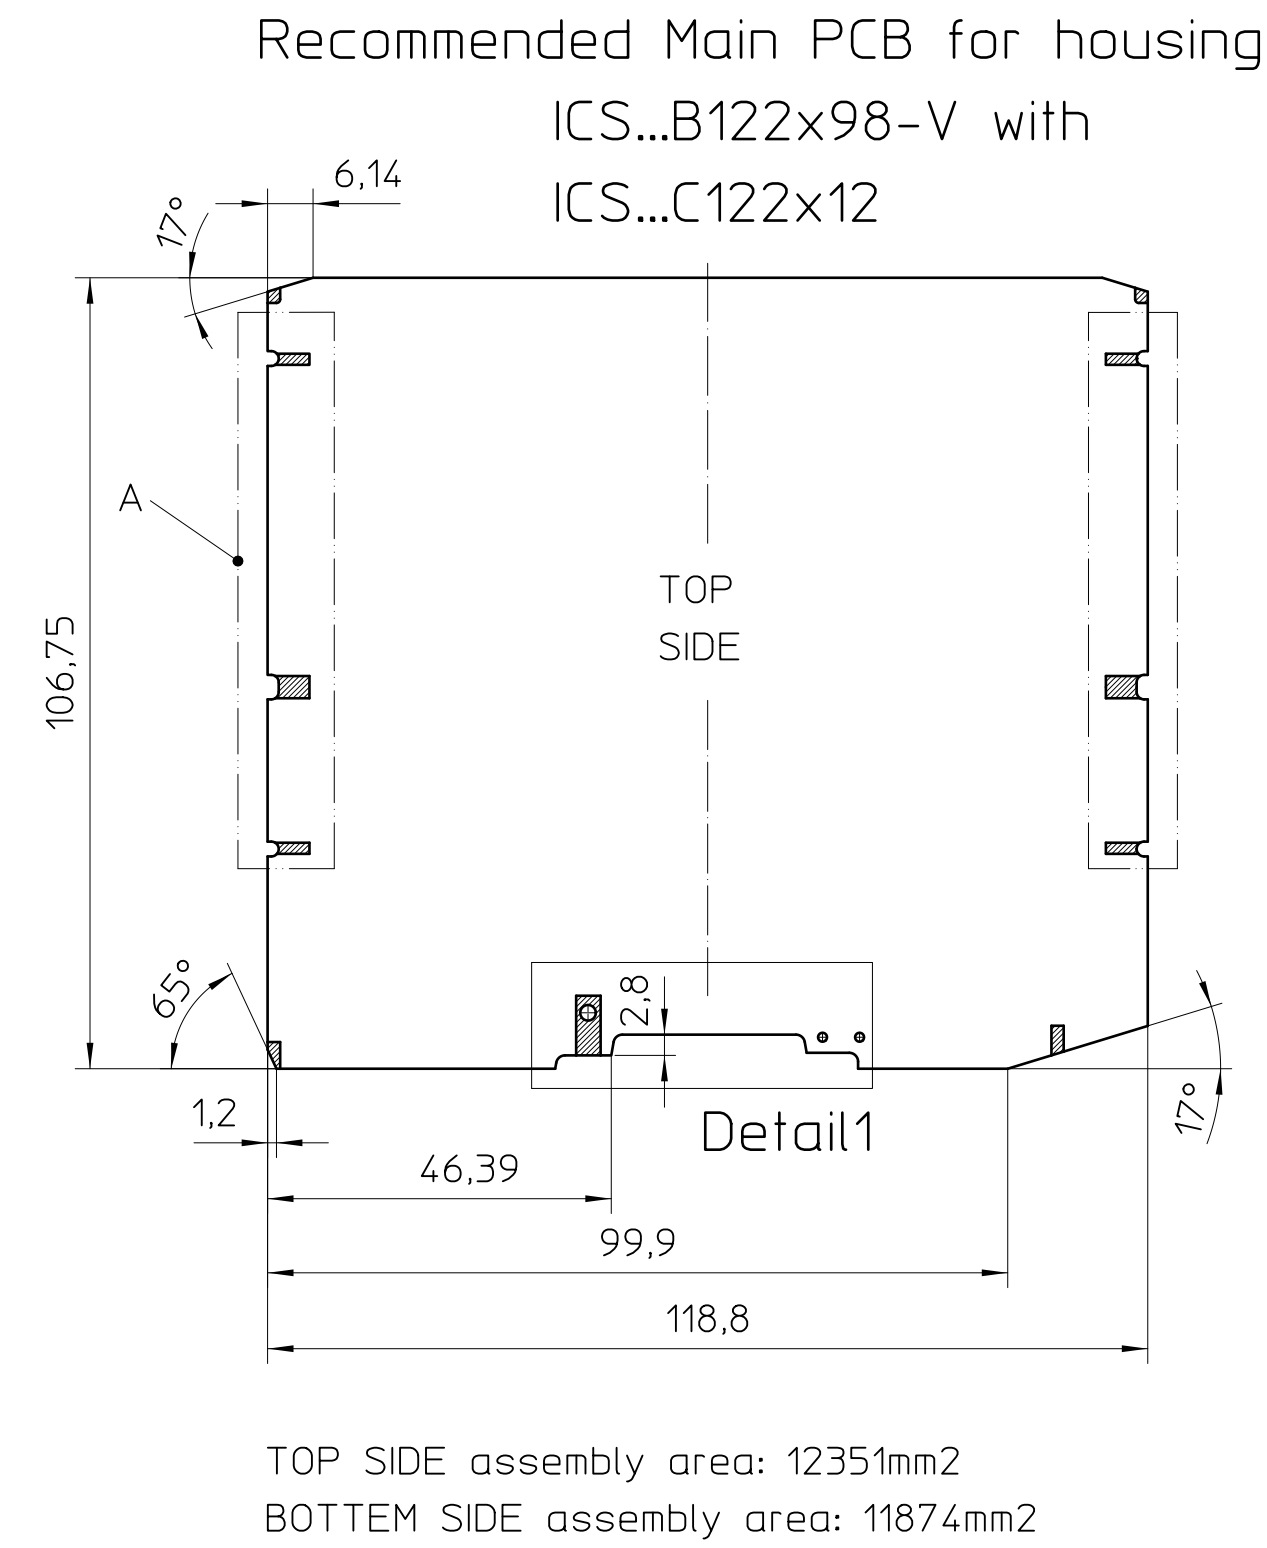


TOP SIDE assembly area: 12351mm²
BOTTEM SIDE assembly area: 11874mm²

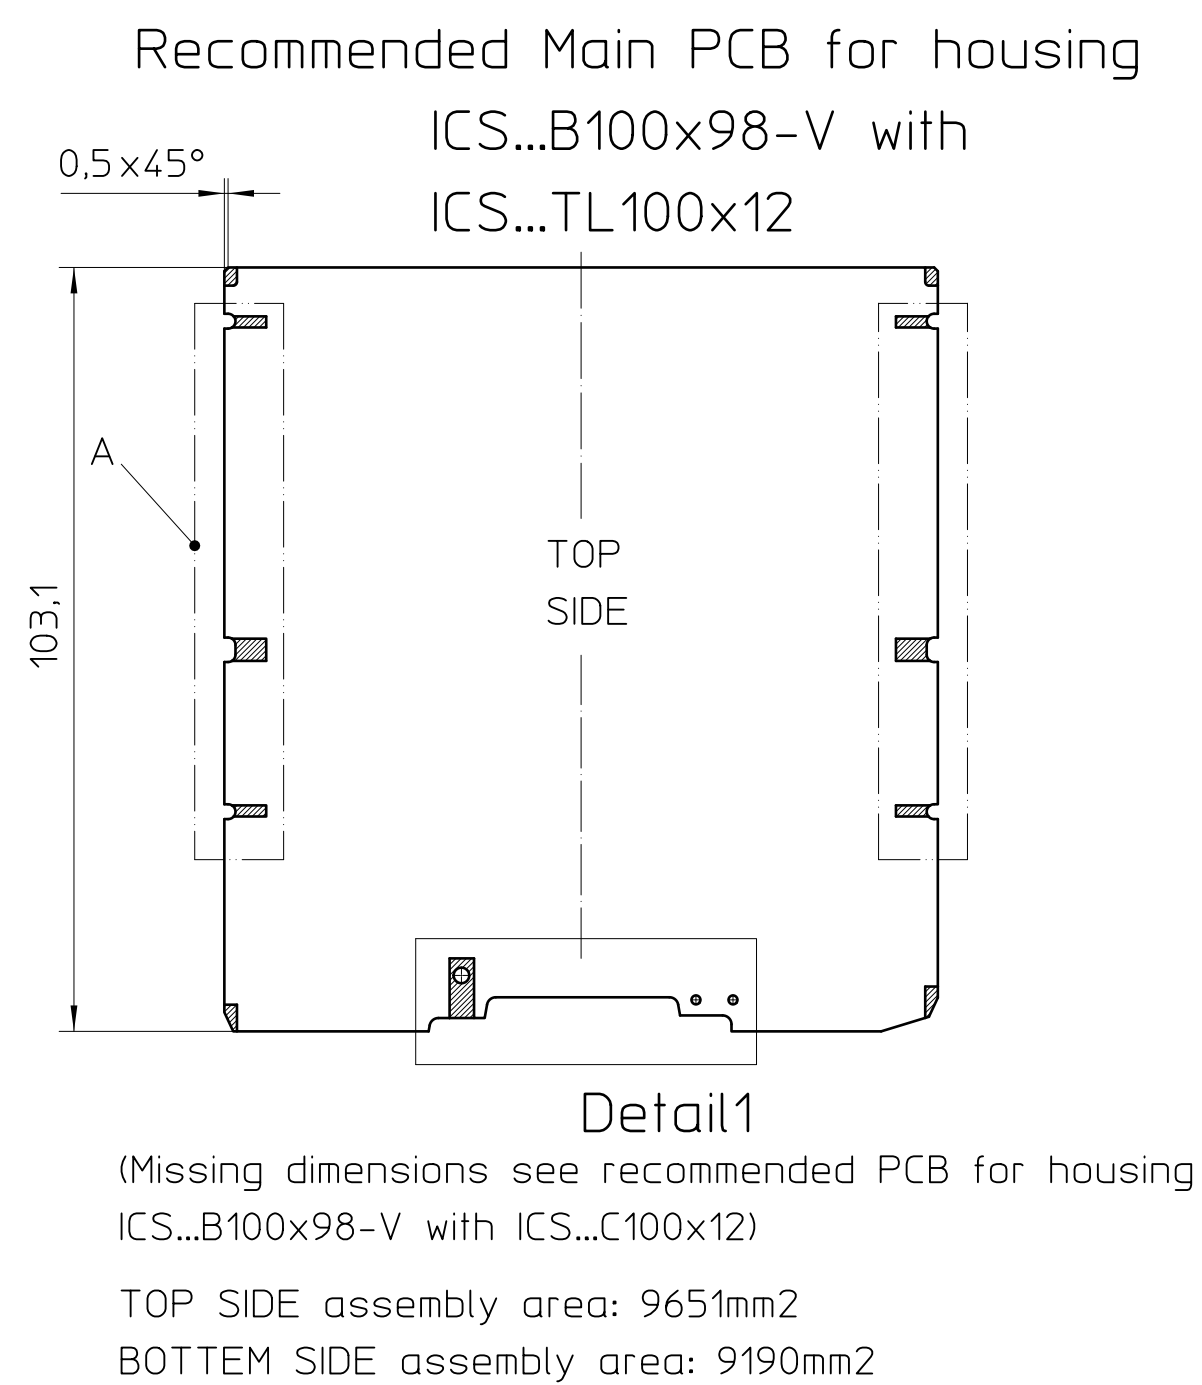


(Missing dimensions see recommended PCB for housing
ICS...B100x98-V with ICS...C100x12)

TOP SIDE assembly area: 9651mm²
BOTTEM SIDE assembly area: 9190mm²

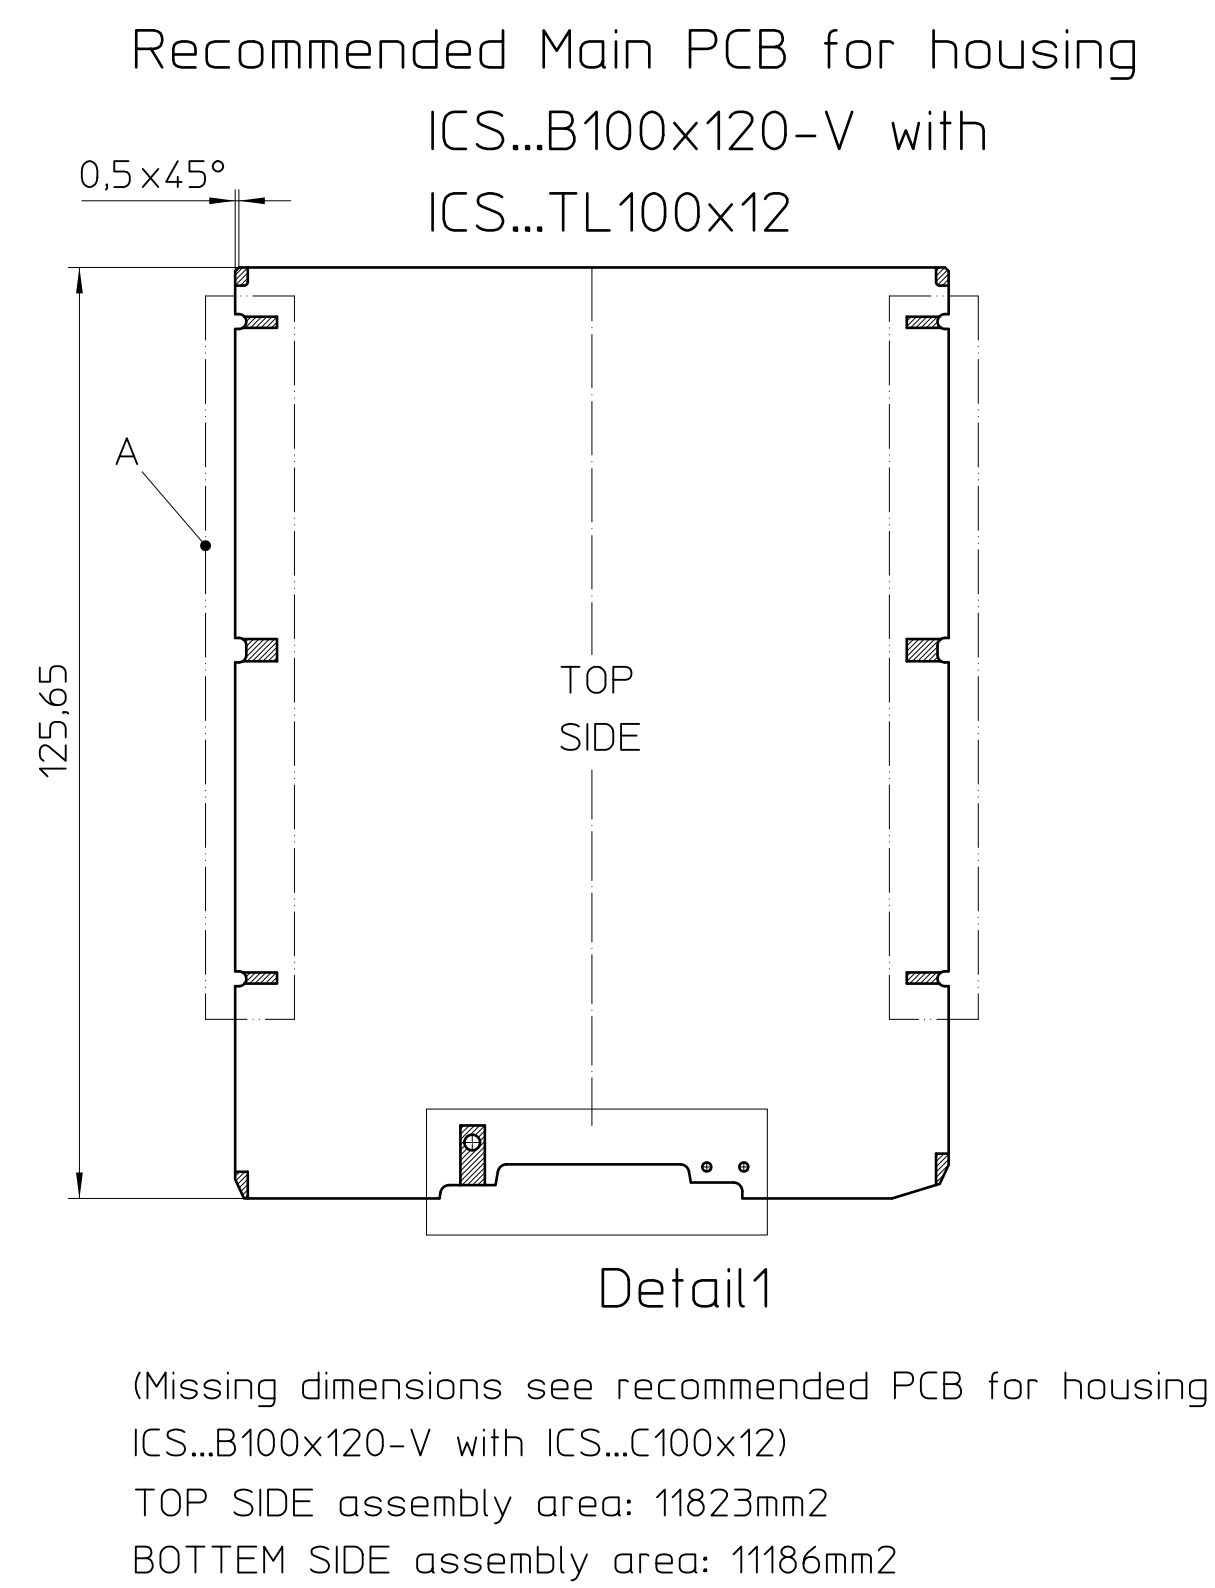


(Missing dimensions see recommended PCB for housing
ICS...B100x120-V with ICS...C100x12)


TOP SIDE assembly area: 11823mm²
BOTTEM SIDE assembly area: 11186mm²

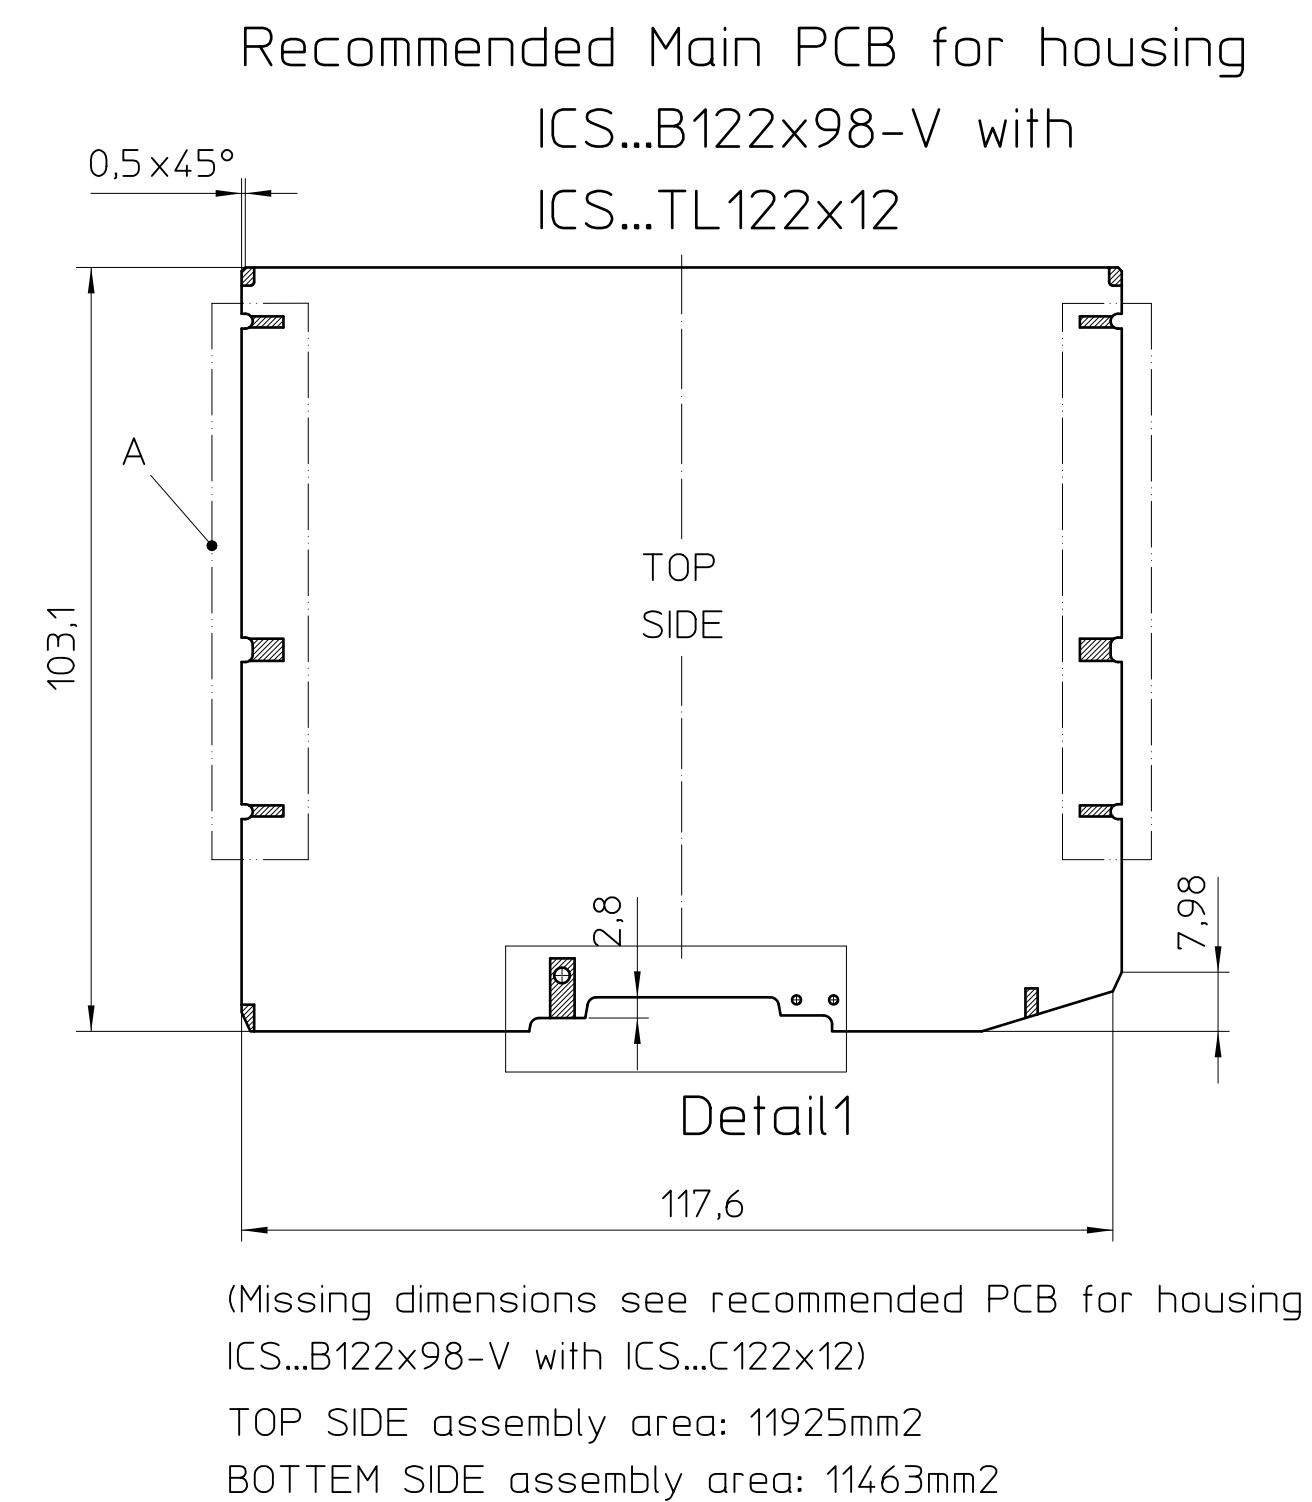

(Missing dimensions see recommended PCB for housing
ICS...B122x98-V with ICS...C122x12)
TOP SIDE assembly area: 11925mm²
BOTTEM SIDE assembly area: 11463mm²

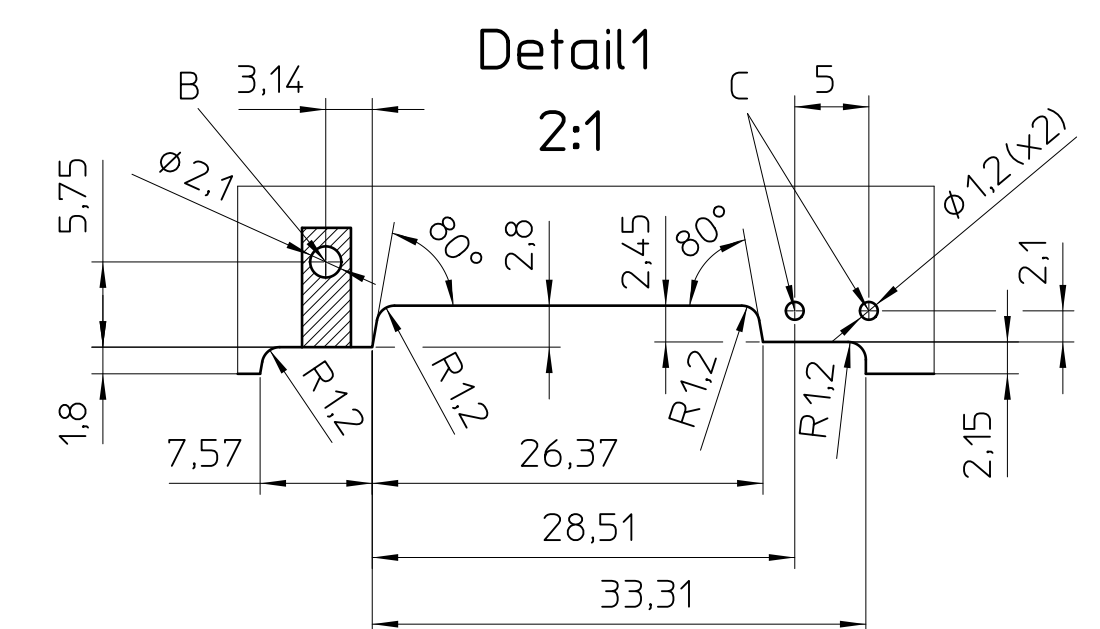

General Information:

- Recommended PCB
- Simplified representation
- Document excluded from change process
- CAD data see download-center on www.phoenixcontact.com
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Tolerances for PCB:
dimensions ≤ 30 : $\pm 0,10$ / $R \pm 0,2$ / $\pm 1^\circ$
dimensions > 30 : $\pm 0,15$ / $R \pm 0,2$ / $\pm 1^\circ$
symmetry: 0,2
- Thickness PCB: $t = 1,6 \pm 0,2$
-  Restricted area, no components

Additional Information

A) Variable area for connection technology or filler ICS...-F...

B) Hole for snap fit

C) Hole for ICS-FE-CONTACT

 DIN A1	document-No. / RI		date	scale
	0197974 / 06		12.06.2025	1:1
 PHENIX CONTACT	ident.-No.	document-type		
	1077064	TECDOC 2D_PCB-Outline		
description		ICS50-B122X98-V-V-7035		
page 1 of 1				