

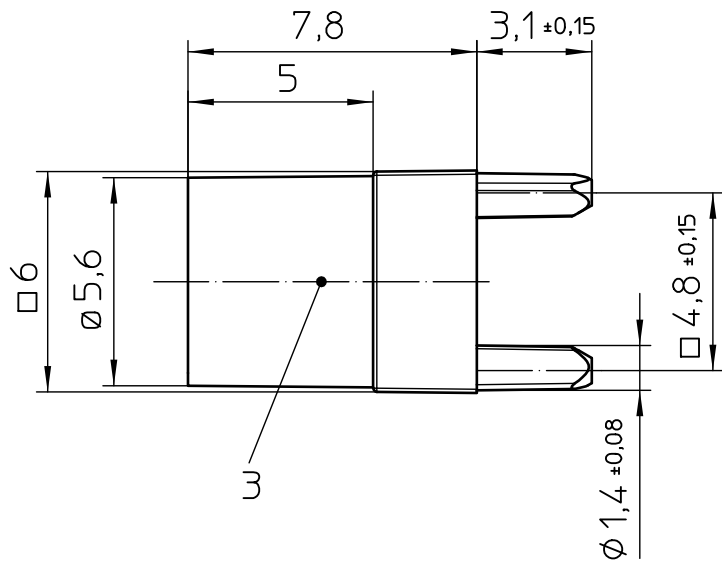
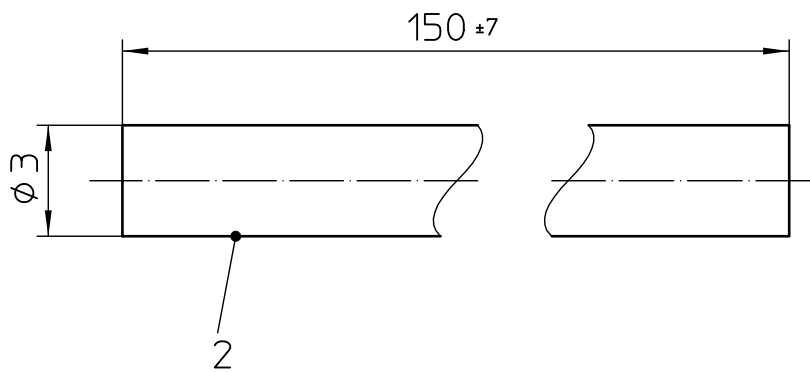


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

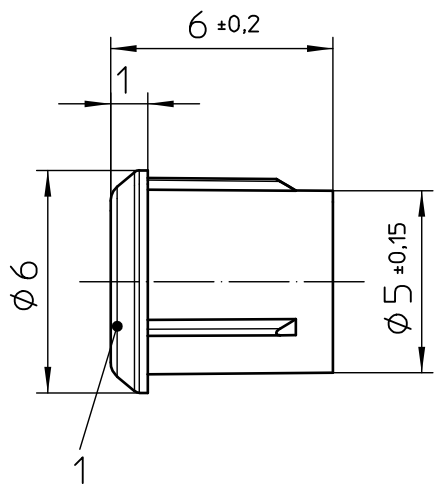


Recommended PCB layout

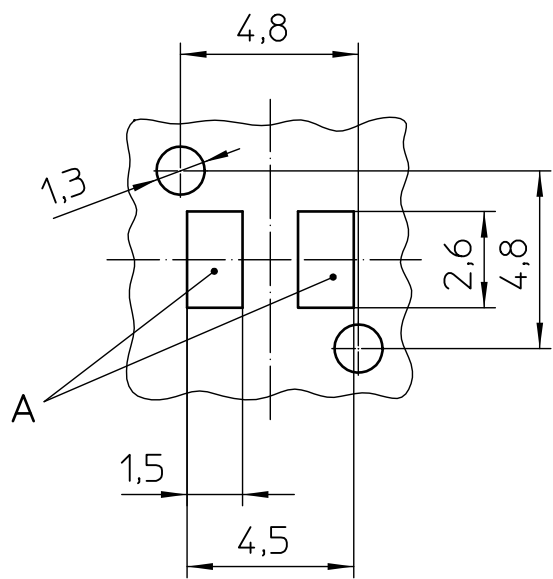

Tolerances for PCB:
dimensions ≤ 30: ± 0.10 / R ± 0.2 / ± 1°
dimensions > 30: ± 0.15 / R ± 0.2 / ± 1°
symmetry: 0.2

Mounting example

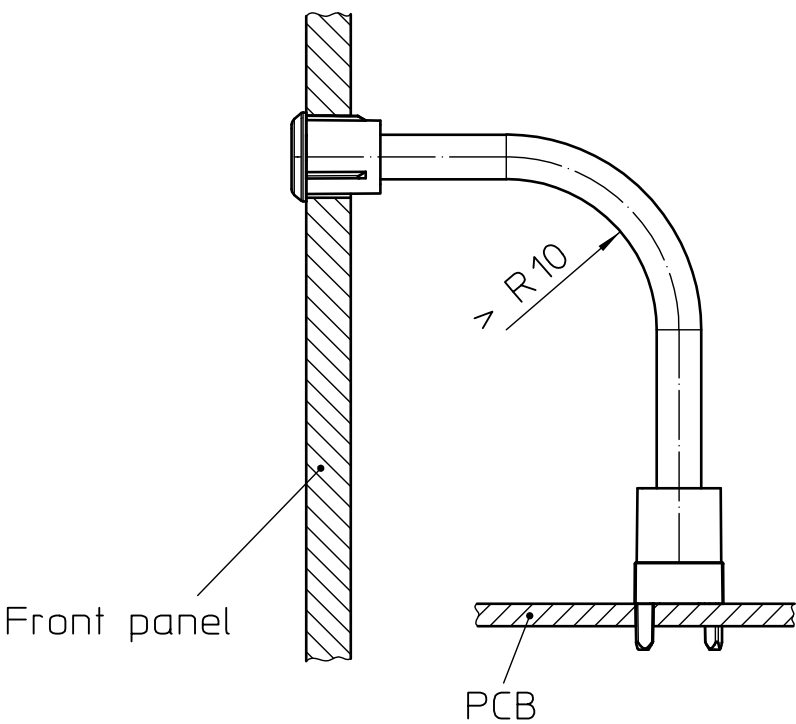

General Information:

- Simplified representation
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Web: www.phoenixcontact.com

Additional Information:

A) Pad for SMD-LED
(max. LED height 2.1mm)

- Mounting hole front panel Ø 5.5mm
- We recommend the use of SMD LED with integrated reflector from OSRAM

LED types: LS T670 LSG T670 LY T676

KIT (not mounted)			
Pos.	QTY	Description	Material
1	1	Lens	PMMA
2	1	Light conductor	PUR
3	1	Light conductor switch	PC

	DIN A3		document-No. / RI 01184511 / 00	date 21.01.2019	scale 5:1
	ident.-No. 1082301		document-type TECD0C 2D_Productdrawing		
	page 1 of 1		description HS LC-F-T6X3-150		