

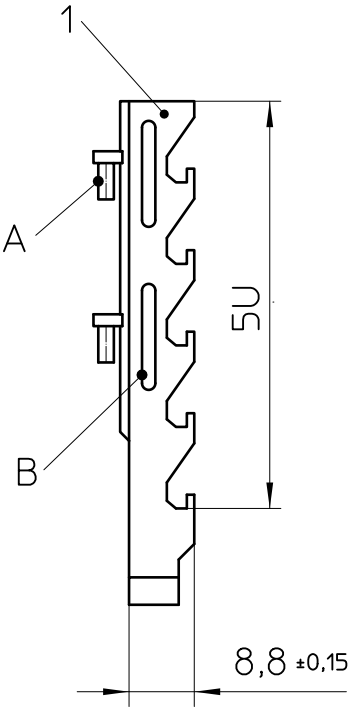
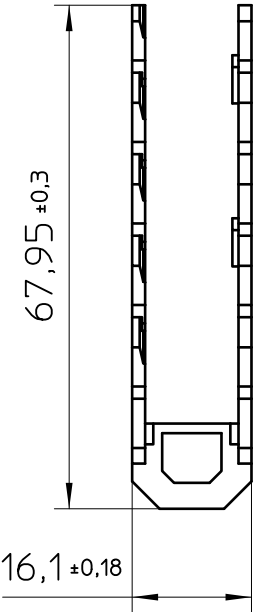


HSC-LR 5U

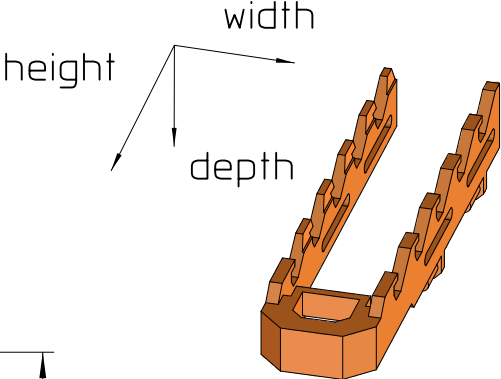

C-SPRING

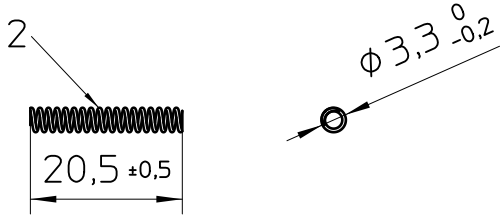

- General Information
- Simplified representation, exemplary shown in orange.
 - Tolerances are valid for dimensions at normal climate according to DIN EN ISO 291-23/50-2 and with 2% moisture content (weight%)
 - In case of distortion there is no functional impact of the single part in the application
 - Document excluded from change process
 - CAD Data see Download-Center on www.phoenixcontact.com
 - Simplified representation

- A. Fixation pin for spring
B. Guidance

KIT

HSC-LR 5U KIT		
Pos.	QTY	Description
1	1	HSC-LR 5U (PA GF)
2	1	C-SPRING 0,48X2,82x20,5 (1.4310)

 DIN A4		document-No. / RI 00760076 / 03		date 29.04.2025	scale 1:1
		ident.-No. 1083384	document-type TECDOC 2D_Productdrawing		
		description HSC-LR 5U KIT 5015			
		page 1	of 1		