
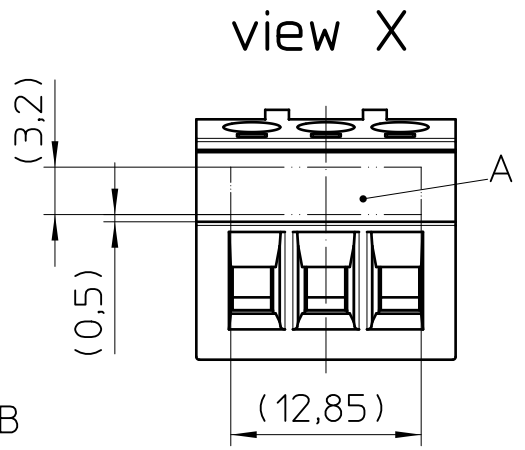
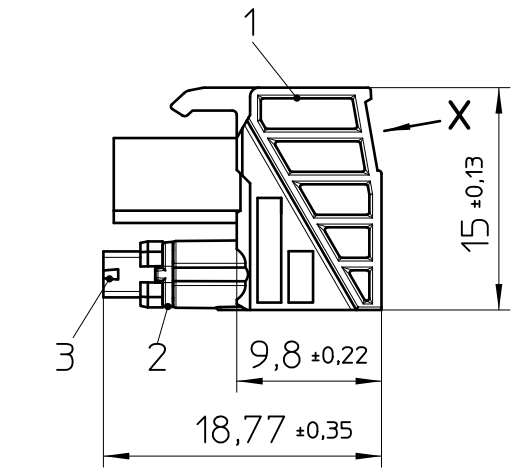
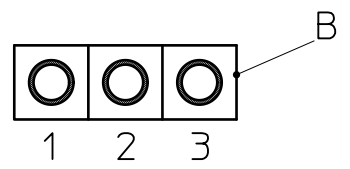
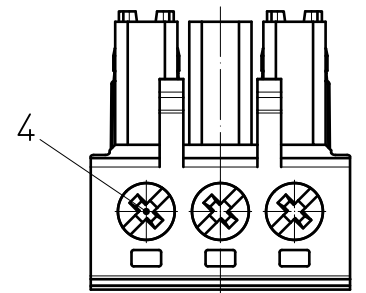
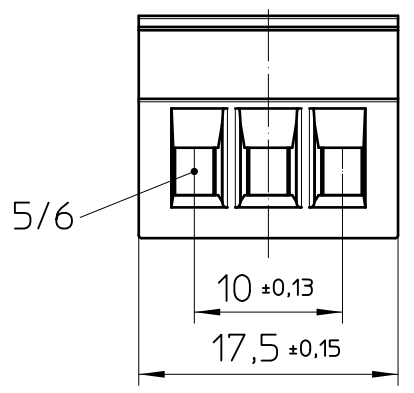
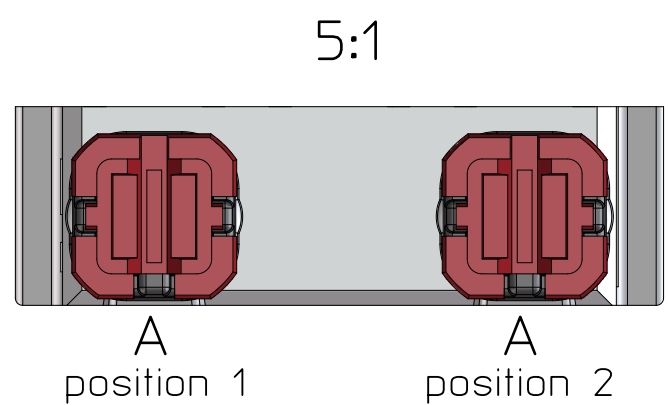
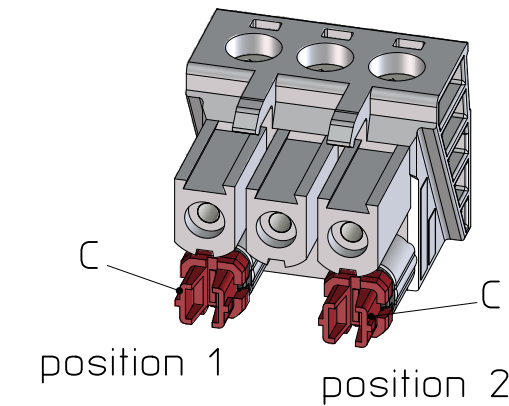


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

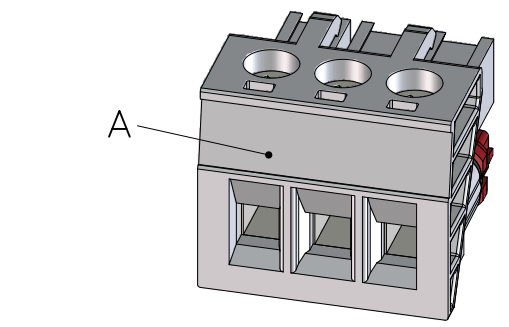

Pos.	QTY	Description	Material
1	1	PLUG	PA
2	2	CODING-PLUG	PA
3	2	CODING-HEADER	PA
4	3	SCREW	Cu alloy
5	3	CLAMPING SLEEVE	Cu alloy
6	3	CURRENT BAR	Cu alloy

General Information:


- Corresponding header ICC20-H/3L/R5,0
- Simplified representation, exemplary shown in grey
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #1635

Additional Information:


- A) Marking area
B) Contact type

schematic symbol	description	electrical symbol
	single contact	
	without contact	

C) Coding adjustment with screwdriver
e.g. 1205037 - SZS 0,4X2,5 VDE

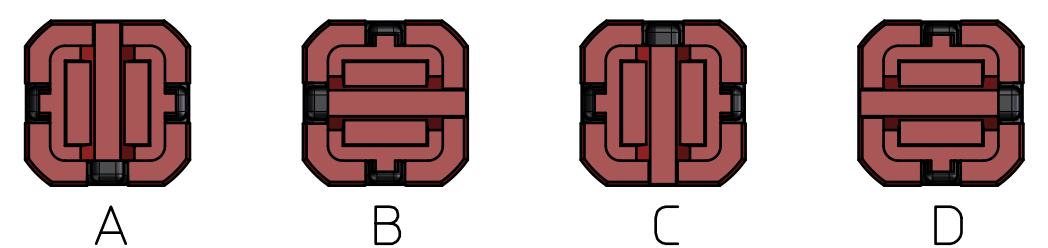

Example: ICC20-PPC2,5/3-5,0- CB



	DIN A3	document-No. / RI	01251288 / 06	date	07.05.2025	scale	2:1
	PHOENIX CONTACT	ident.-No.	1084026	document-type	TECDOC 2D-PRODUCTDRAWING		
page 1	of 1	description ICC20-PSC2,5/3-5,0-AA-7035					