
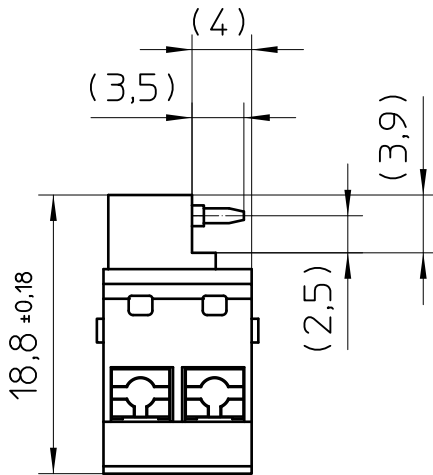
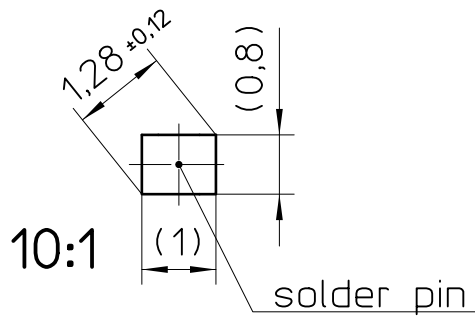
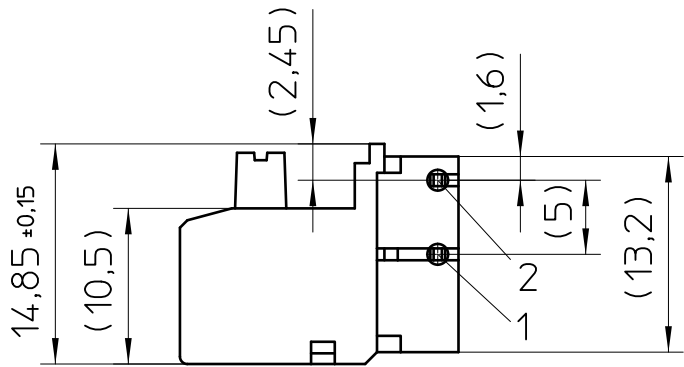
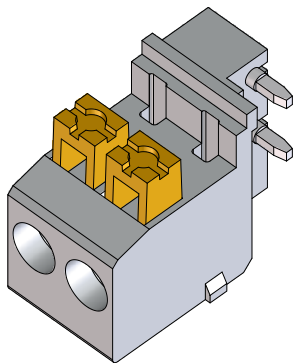


recommended PCB drilling plan
view: component side

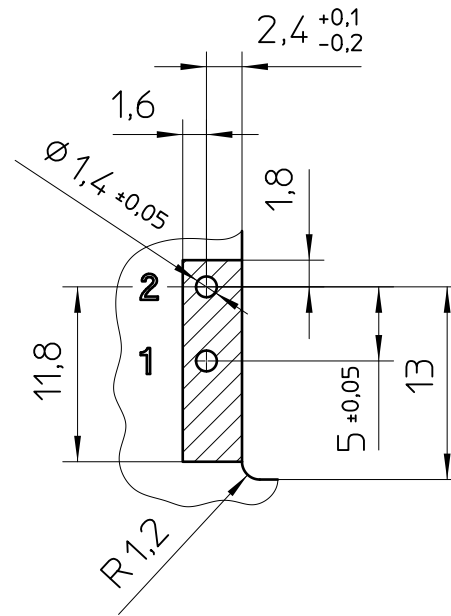

General tolerances:


dimensions ≤ 30 : $\pm 0,1/R \pm 0,2/\pm 1^\circ$

dimensions > 30 : $\pm 0,15/R \pm 0,2/\pm 1^\circ$

symmetry: 0,2

General Information

- Simplified representation, exemplary shown in gray
- Restricted area
- Document excluded from change process
- CAD Data see Download-Center on www.phoenixcontact.com
- When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
- Linear dimensions [mm]
- Tolerances, apply in a normal climate according to DIN 50014-23/50-2, with about 2% (% by weight) moisture content.

 DIN A3		document-No. / RI 00836661 / 04	date 20.10.2025	scale 2:1
		ident.-No. 1007178	document-type TECDOC 2D_Productdrawing	
page 1 of 1		description FKDSO 2,5/ 2-R GY		