


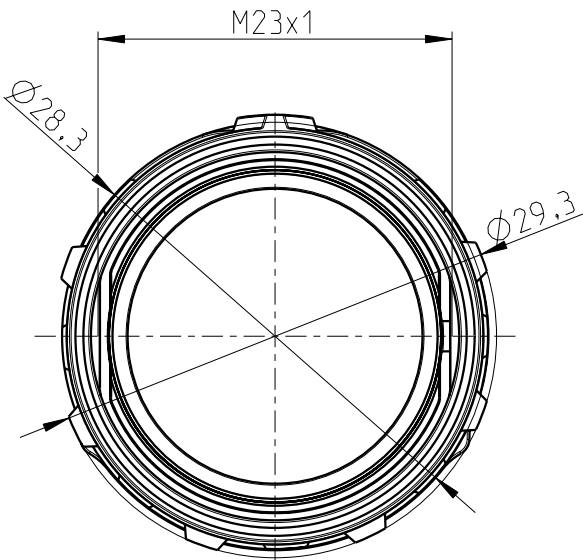


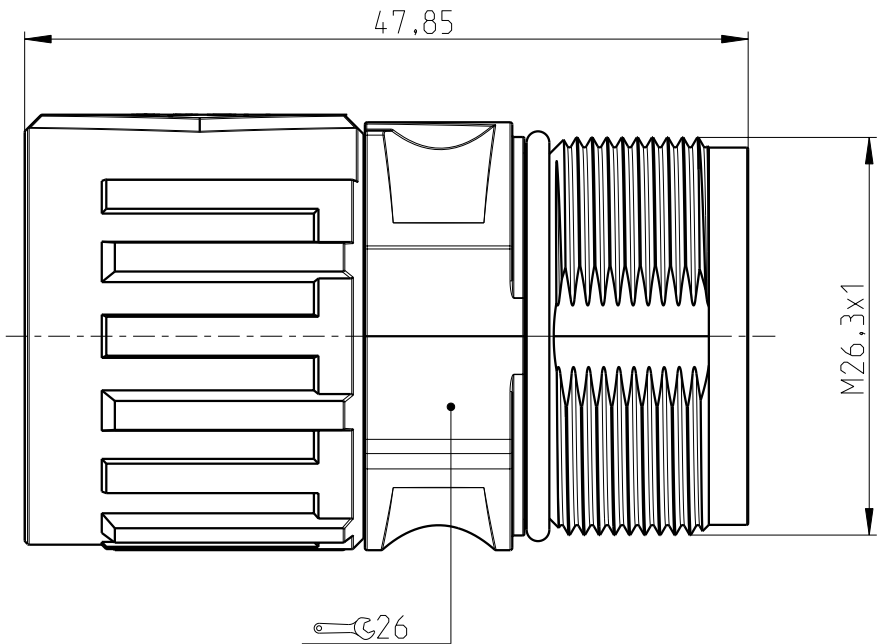

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungs- kategorie			
						Aufstellhöhe			
Bemessungsspannung						Durchgangswiderstand			
Bemessungsstoßspannung						Verschmutzungsgrad			
							Technische Änderung vorbehalten		Maßstab: 2:1
					Datum	Name	Benennung: Serie SH Gehäuse Bauform 8 SpeedCon		
				Bearb.	2017-08-14	Bengel			
				Gepr.					
							Zeichnungsnummer: SH-Z0010		Blatt: 1 von: 2
							Artikel Nr.: 1008159		
Aus- gabe	Änderung	Datum	Name						

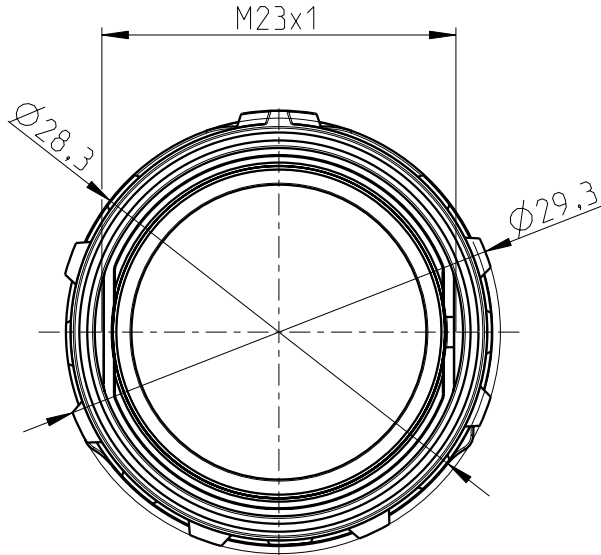

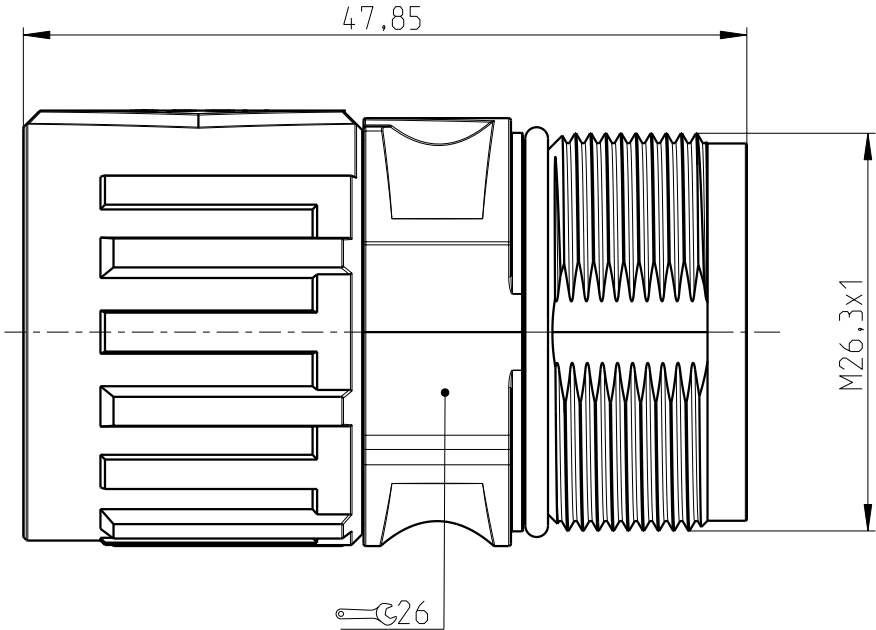

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Electrical Data									
Rated current at max. cross section						Surge voltage category			
						Installation height			
Rated voltage						Contact resistance			
Rated surge voltage						Degree of pollution			
Contact-Ø						technical changes reserved			scale:
Temperature range									2:1
Degree of protection						description: Series SH housing style 8 speedcon			
Mechanical insertion/withdrawal cycles									
Material						drawing no.: SH-Z0010			page: 2 of: 2
Housing	GD-Zn / Ni								
Insulating body			see page 1			order no.: 1008159			
Contacts		edition	changes	date	name				
Seal	FKM								

