


Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt							Überspannungs-kategorie		
							Aufstellhöhe		
Bemessungsspannung							Durchgangswiderstand		
Bemessungsstoßspannung							Verschmutzungsgrad		
							Technische Änderung vorbehalten		Maßstab: 2:1
					Datum	Name	Benennung: Serie SF CAT5 Einsatzhülse		
				Bearb.	2017-08-15	Bengel			
				Gepr.					
							Zeichnungsnummer: SH-Z0013		Blatt: 1 von: 2
Aus-gabe	Änderung	Datum	Name				Artikel Nr.: 1008162		

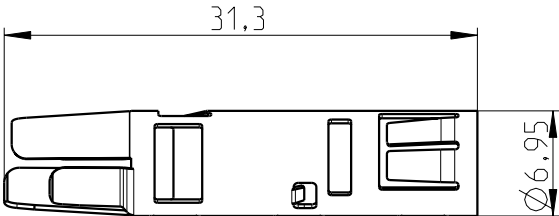

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

		Electrical Data									
		Rated current at max. cross section						Surge voltage category			
Mechanical Data								Installation height			
Number of pos./ Contact style		Rated voltage						Contact resistance			
Contact termination		Rated surge voltage						Degree of pollution			
Contact-Ø									technical changes reserved		scale: 2:1
Temperature range											
Degree of protection											
Mechanical insertion/withdrawal cycles						design	date	name	description: Series SF CAT5 insert sleeve		
						chk.					
Material									drawing no.:		page: 2 of: 2
Housing	CuSn								SH-Z0013		
Insulating body			see page 1						order no.: 1008162		
Contacts		edition	changes	date	name						
Seal											