



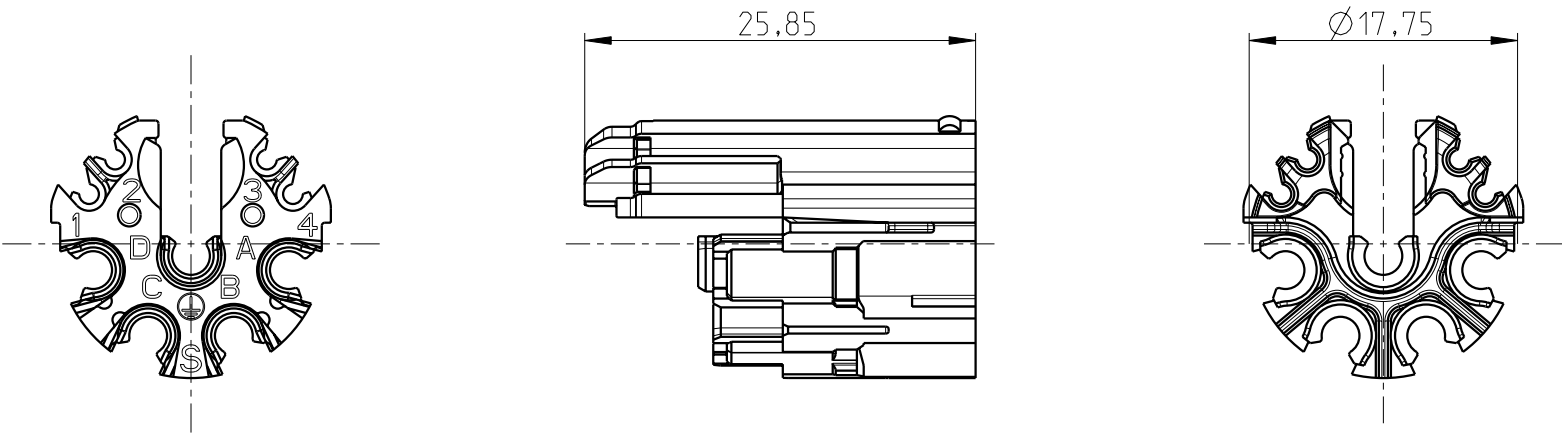

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

		Elektrische Daten											
		Bemessungsstrom bei max. Anschlußquerschnitt								Überspannungskategorie			
										Aufstellhöhe			
Mechanische Daten		Bemessungsspannung								Durchgangswiderstand			
Polzahl / Kontaktart		Bemessungsstoßspannung								Verschmutzungsgrad			
Kontaktanschlussart									Technische Änderung vorbehalten			Maßstab: 1:1	
Kontakt-Ø													
Temperaturbereich							Datum	Name	Benennung: Serie SH Kontaktträger Hybrid Buchse				
Schutzart						Bearb.	2017-08-15	Bengel					
Steckzyklen						Gepr.							
Material									Zeichnungsnummer: SH-Z0014			Blatt: 1 von: 2	
Gehaeuse													
Kontakttraeger/ISO		PA 66											
Kontakte		Ausgabe	Änderung	Datum	Name				Artikel Nr.: 1008163				
Dichtungen													

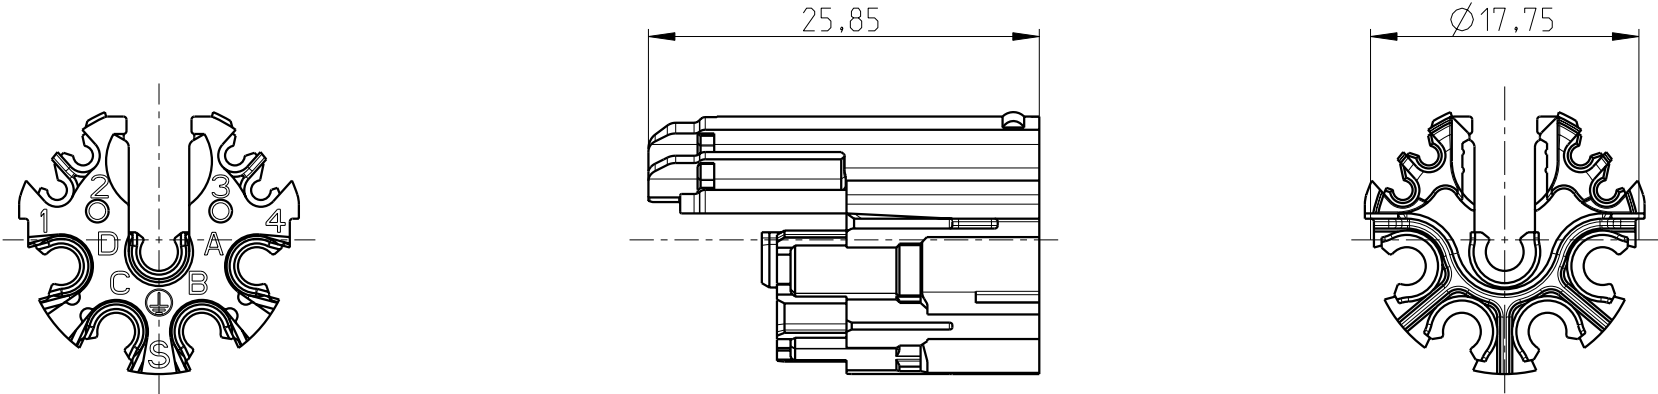

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

		Electrical Data											
		Rated current at max. cross section								Surge voltage category			
Mechanical Data										Installation height			
Number of pos./ Contact style		Rated voltage								Contact resistance			
Contact termination		Rated surge voltage								Degree of pollution			
Contact-Ø									technical changes reserved			scale: 1:1	
Temperature range							date	name	description: Series SH Insert Hybrid socket				
Degree of protection						design	2017-08-15	Bengel					
Mechanical insertion/withdrawal cycles						chk.							
									drawing no.: SH-Z0014				
Material													
Housing									page: 2 of: 2				
Insulating body		PA 66		see page 1		order no.: 1008163							
Contacts			edition	changes	date				name				
Seal													