

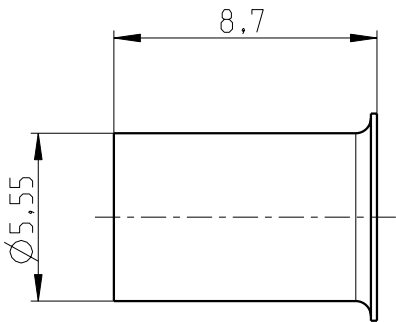


Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten						Überspannungs-kategorie		
						Aufstellhöhe		
Mechanische Daten		Bemessungsspannung				Durchgangswiderstand		
Polzahl / Kontaktart		Bemessungsstoßspannung				Verschmutzungsgrad		
Kontaktanschlussart						Technische Änderung vorbehalten		Maßstab: 4:1
Kontakt-Ø								
Temperaturbereich						Benennung:		Serie SH CAT5 Schirmhülse
Schutzart								
Steckzyklen								
Material						Zeichnungsnummer:		Blatt: 1 von: 2
Gehäuse	CuZn / Ni							
Kontaktträger/ISO						SH-Z0015		Artikel Nr.: 1008164
Kontakte		Aus-gabe	Änderung	Datum	Name			
Dichtungen								

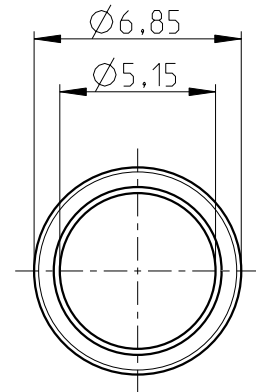

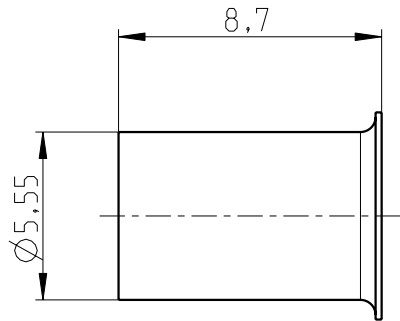

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Mechanical Data		Electrical Data				Surge voltage category			
Number of pos./ Contact style		Rated voltage				Installation height			
Contact termination		Rated surge voltage				Contact resistance			
Contact-Ø						Degree of pollution			
Temperature range						technical changes reserved		scale: 4:1	
Degree of protection									
Mechanical insertion/withdrawal cycles						description: Series SH CAT5 shield sleeve			
Material						drawing no.:		page: 2 of: 2	
Housing	CuZn / Ni					SH-Z0015			
Insulating body			see page 1						
Contacts		edition	changes	date	name	order no.: 1008164			
Seal									

