
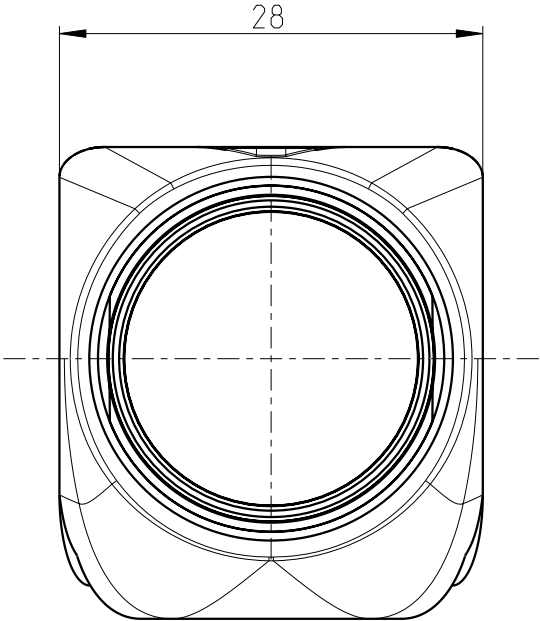


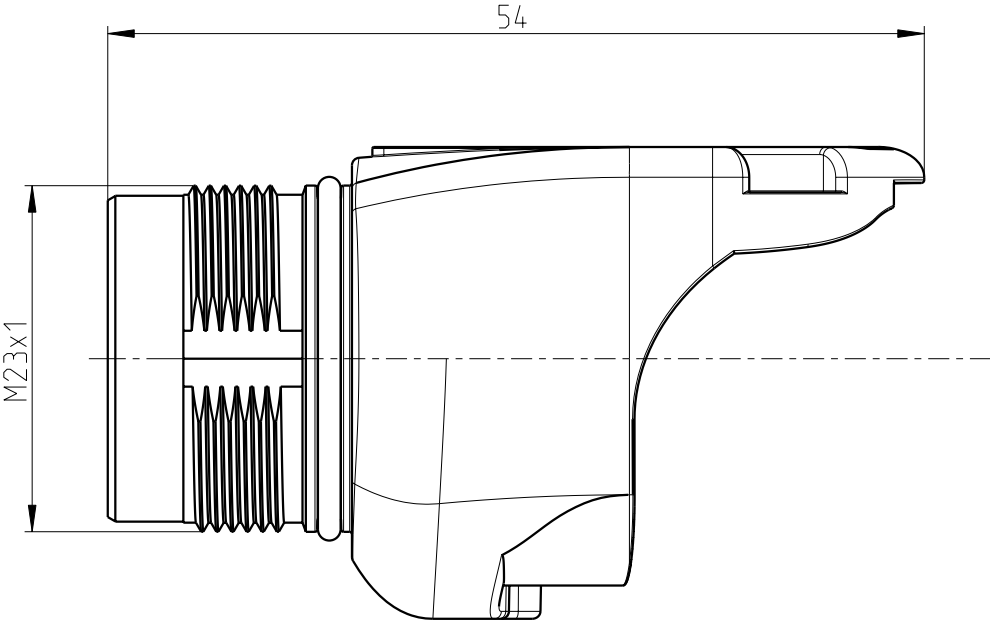

Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt				Überspannungs- kategorie					
Bemessungsspannung				Aufstellhöhe					
Bemessungsstoßspannung				Durchgangswiderstand					
				Verschmutzungsgrad					
				Technische Änderung vorbehalten				Maßstab: 2:1	
				Benennung:					
				Serie SH					
				Deckel					
				Zeichnungsnummer:				Blatt: 1 von: 2	
				SH-Z0020					
				Artikel Nr.: 1008170					
				PHOENIX CONTACT					


Mechanische Daten

Polzahl / Kontaktart	
Kontaktanschlussart	
Kontakt-Ø	
Temperaturbereich	
Schutzart	
Steckzyklen	

Material	
Gehäuse	GD-Zn
Kontaktträger/ISO	
Kontakte	
Dichtungen	FKM

	Datum	Name
Bearb.	2017-08-16	Bengel
Gepr.		



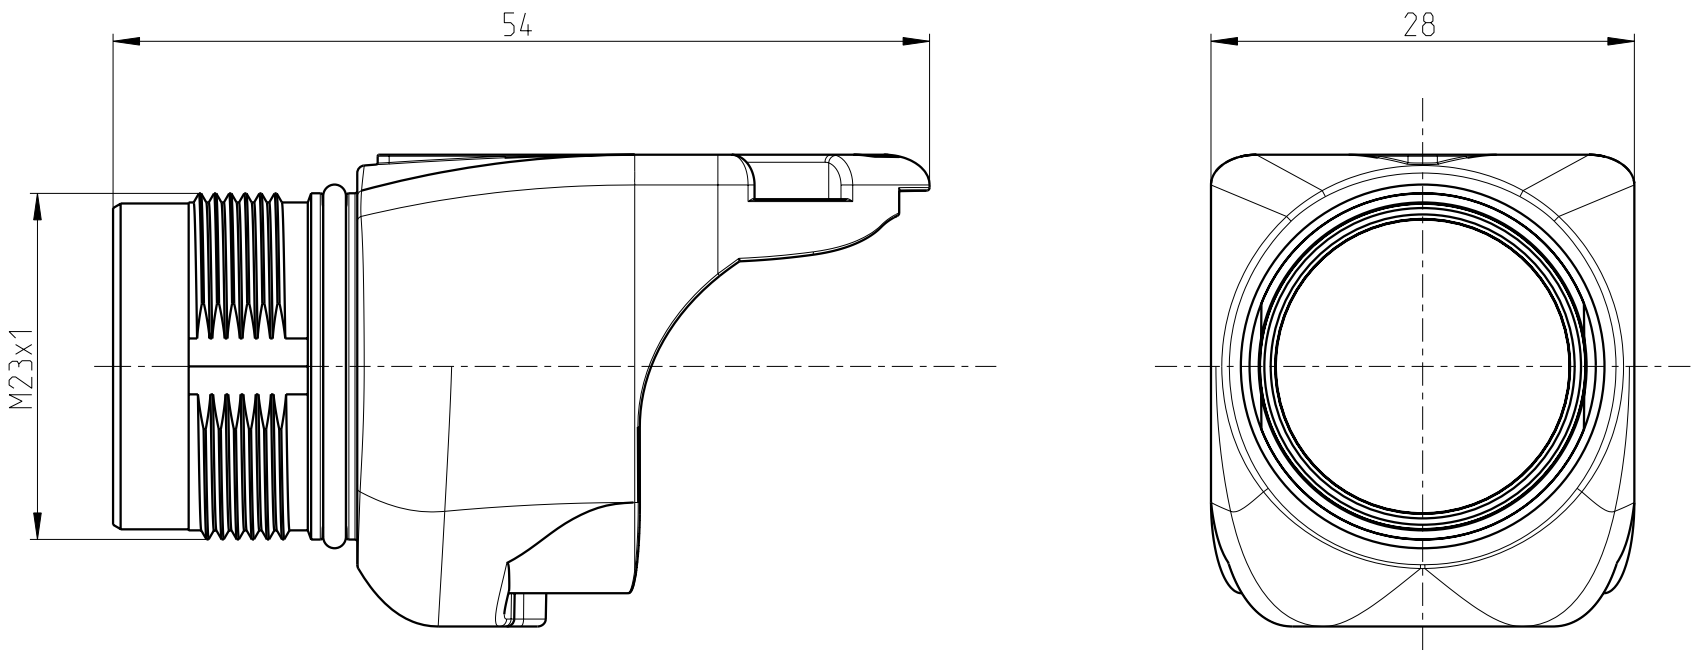

The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap ≥ IP54.

Electrical Data						Surge voltage category		
Rated current at max. cross section						Installation height		
Mechanical Data		Rated voltage				Contact resistance		
Number of pos./ Contact style		Rated surge voltage				Degree of pollution		
Contact termination						technical changes reserved		scale: 2:1
Contact-Ø								
Temperature range								
Degree of protection						description: Series SH cap		page: 2 of: 2
Mechanical insertion/withdrawal cycles								
Material						drawing no.: SH-Z0020		
Housing		GD-Zn						
Insulating body			see page 1			order no.: 1008170		
Contacts								
Seal		FKM						
		edition	changes	date	name			

