

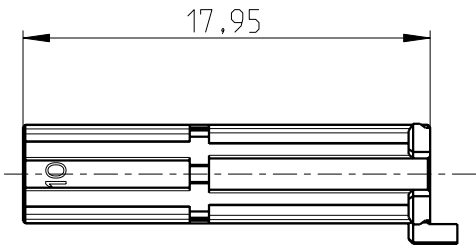


Die angegebenen elektrischen und mechanischen Daten setzen ein korrekt verriegeltes Steckverbinderpaar voraus. Ist der Steckverbinder unverriegelt und besteht die Gefahr von Verschmutzung, so ist der Steckverbinder durch eine Schutzkappe $\geq$ IP54 zu verschließen.

Elektrische Daten									
Bemessungsstrom bei max. Anschlußquerschnitt						Überspannungs-kategorie			
						Aufstellhöhe			
Bemessungsspannung						Durchgangswiderstand			
Bemessungsstoßspannung						Verschmutzungsgrad			
							Technische Aenderung vorbehalten		Maßstab: 3:1
					Datum	Name	Benennung: Serie SH Kontaktträger 6pol Stift		
				Bearb.	2017-08-16	Bengel			
				Gepr.					
							Zeichnungsnummer: SH-Z0007		Blatt: 1 von: 2
Aus-gabe	Änderung	Datum	Name				Artikel Nr.: 1008408		



The specified electrical and mechanical data require a correctly locked pair of connectors.
If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap $\geq$ IP54.

Mechanical Data		Electrical Data				Surge voltage category		Installation height	
Number of pos./ Contact style		Rated voltage				Contact resistance			
Contact termination		Rated surge voltage				Degree of pollution			
Contact-Ø						technical changes reserved		scale: 3:1	
Temperature range									
Degree of protection									
Mechanical insertion/withdrawal cycles						description: Series SH Insert 6pole pin			
Material						drawing no.: SH-Z0007		page: 2 of: 2	
Housing									
Insulating body	PA 66		see page 1			order no.: 1008408			
Contacts		edition	changes	date	name				
Seal									