

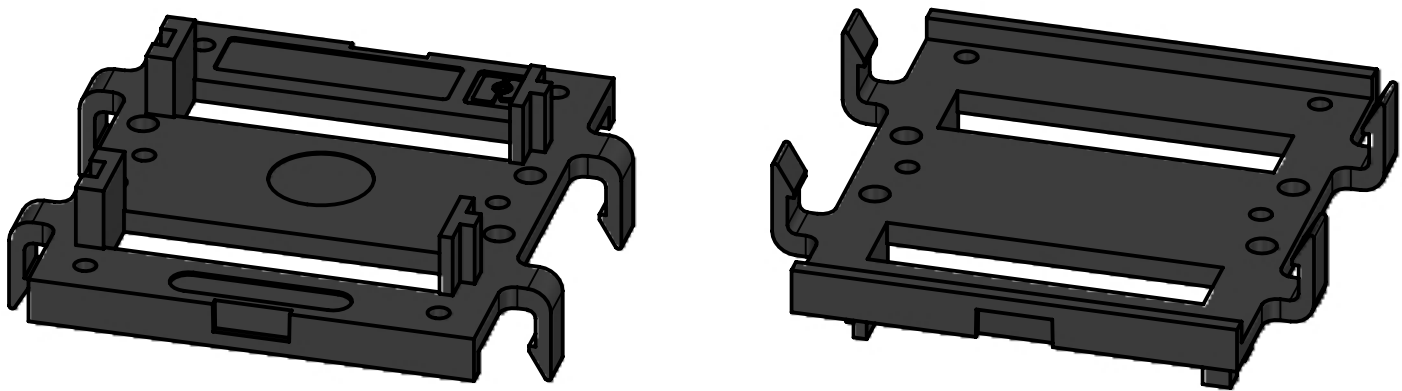


HBUS UPPER PART

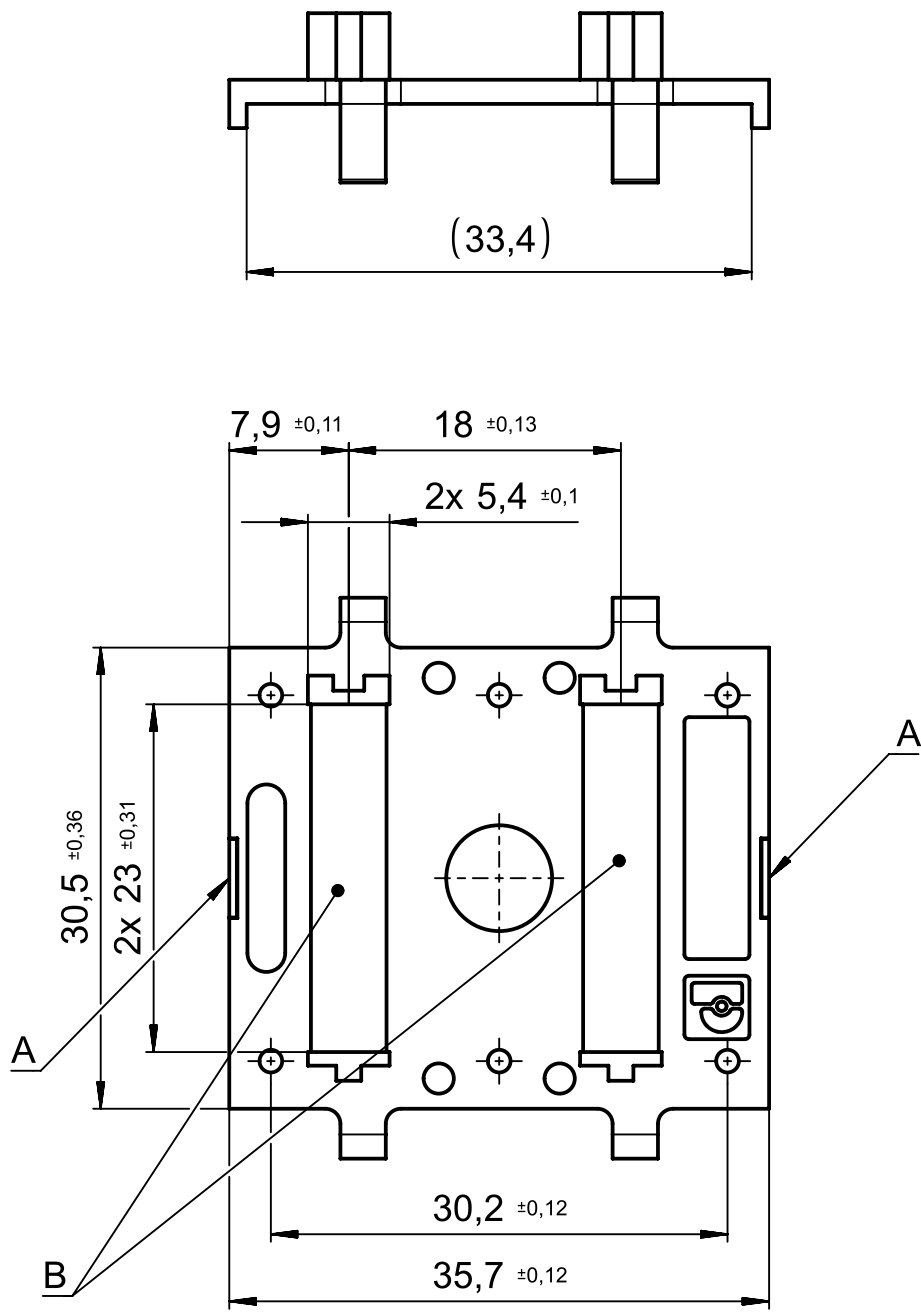

Assembly example: HBUS 35,6 16P-2S OT
HBUS 35,6 UT

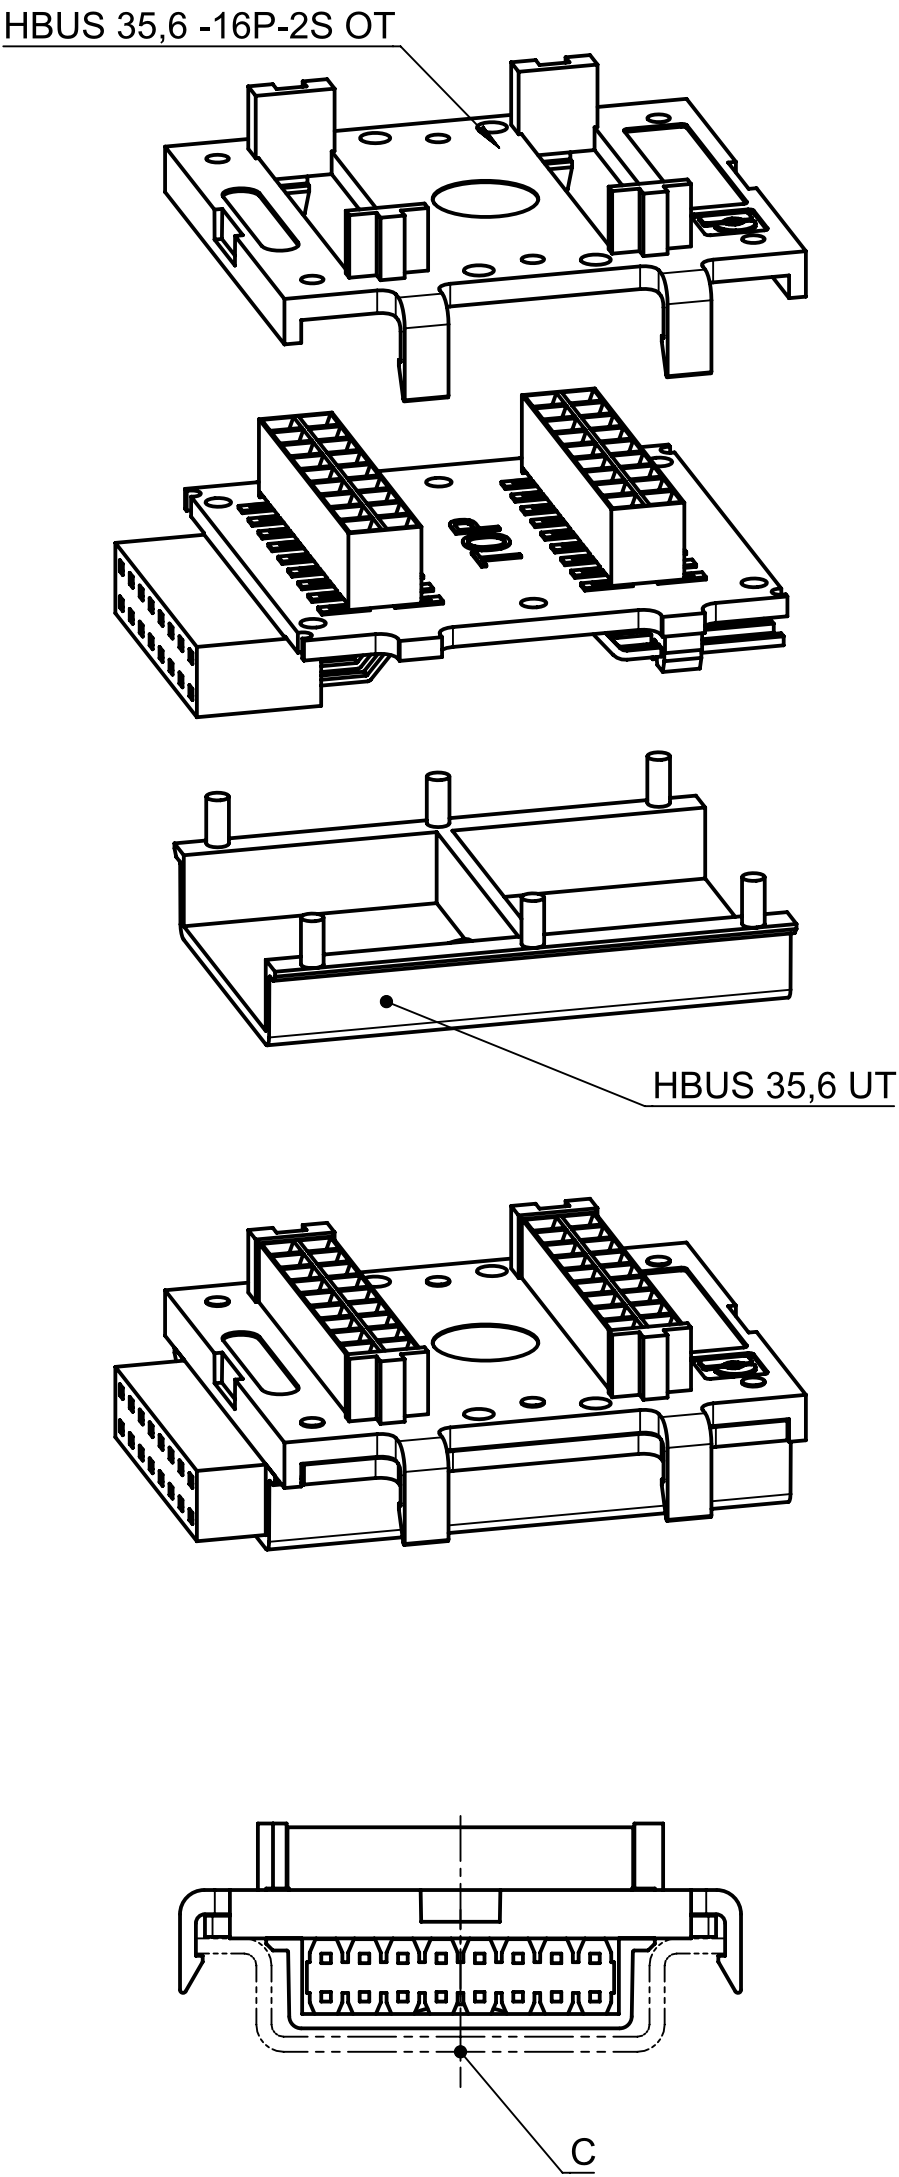

General Information:

- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
PA plastic parts with about 2% (% by weight) moisture content.
- Tolerances for mechanical processing are ISO 2768-mK
- Tolerances for printing DIN ISO 2768-m
- Further information: www.phoenixcontact.com

- A) Disassembly notch to separate HBUS module with screwdriver
B) Contour (breakout) for socket strip
C) Mounting rail like EN 60715: TH 35-7,5 or ,ounting rail similar to EN 60715, TH 35-15x1,5

	DIN A2	document-no. / ri 102809728 / 00	article-no. 1012037 / 00	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions (mm)
	PHOENIX CONTACT	date 2025-08-26	document-type TECDOC 2D-Productdrawing		
description HBUS 35,6-16P-2S OT BK					
page 1	of 1				