
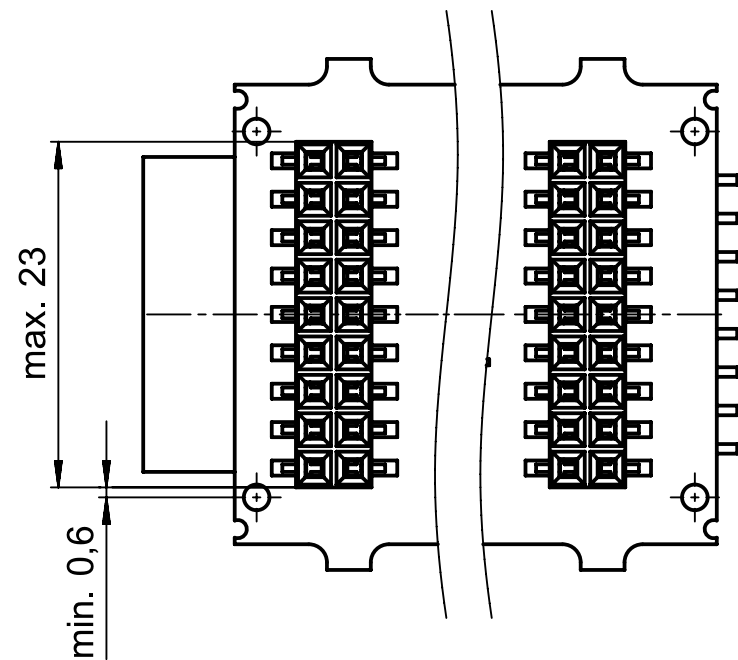
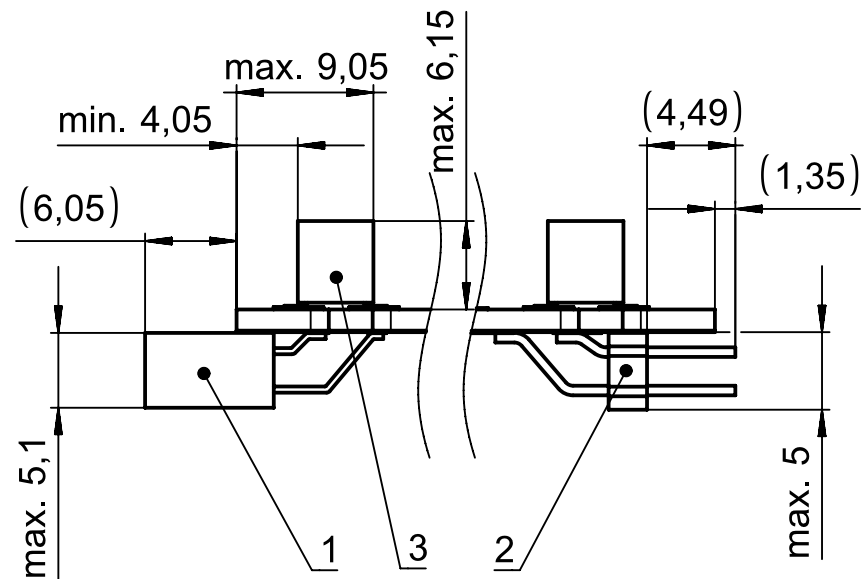


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.



Assembly example for: HBUS PCB...16P-2S

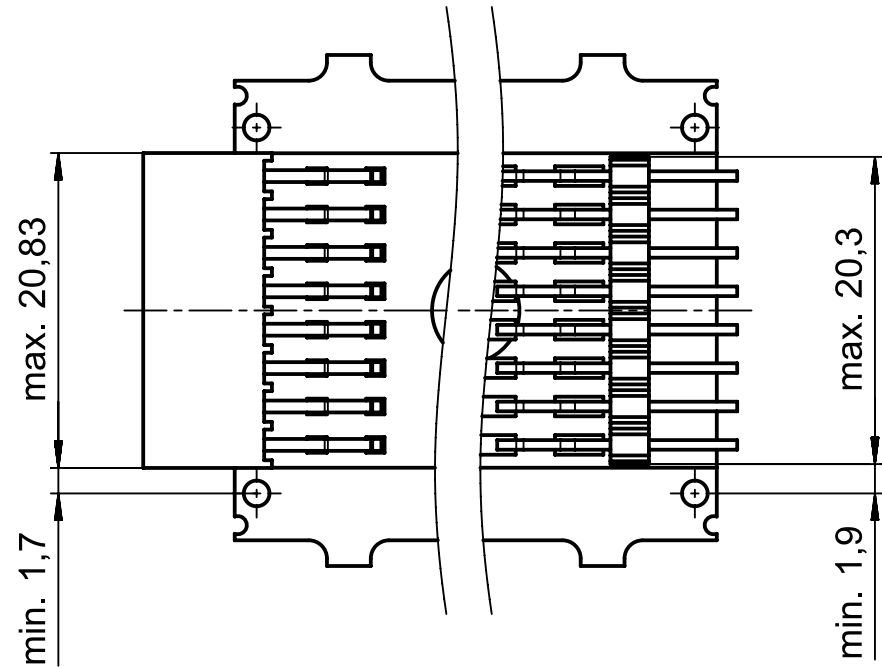

Additional Information:

1. max. component height 5,1
pad's for (SOCKET 16pin DIL 2,54 90° AU SMD)
2. max. component height 5,0
pad's for (HEADER 16pin DIL 2,54 90° AU SMD)
3. max. component height 6,15
pad's for (SOCKET 18pin DIL 2,54 AU SMD)

Recommended PCB for: HBUS 35,6-16P-2S OT
and HBUS 35,6 UT

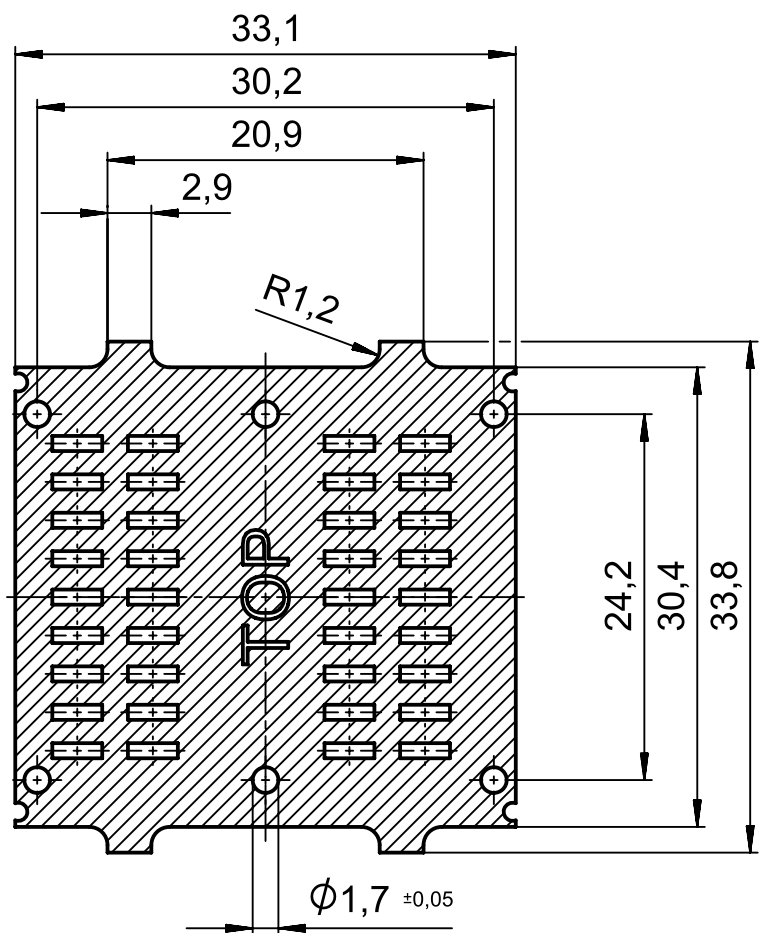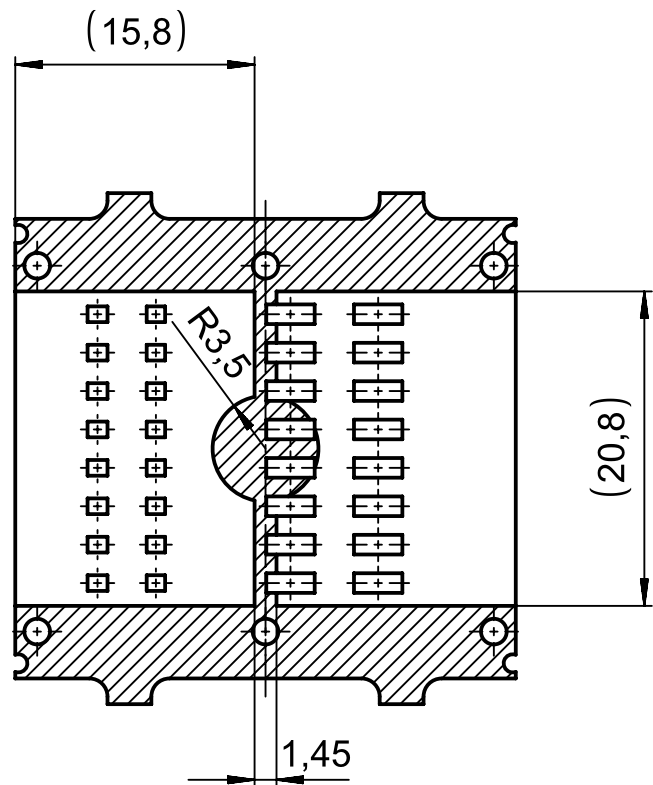

General Information:

- Recommended PCB
- CAD data see download-center on www.phoenixcontact.com
- Dimensions in millimeters [mm], angles in degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2
- Tolerances for PCB:
dimensions <= 30: ±0,10 / R±0,2 / ±1°
dimensions > 30: ±0,15 / R±0,2 / ±1°
symmetry: 0,2
- Thickness PCB: t=1,6±0,2 t= max.1,8mm
- Restricted area, no components

	DIN A2		document-no. / ri 102832277 / 00	article-no. 1012037 / 00	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions (mm)
		date 2025-09-02	document-type TECDOC 2D-PCB-Outline			
description HBUS 35,6-16P-2S OT BK						
page 1		of 1				