

A

B

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

1

2

3











4

5

6

7

8

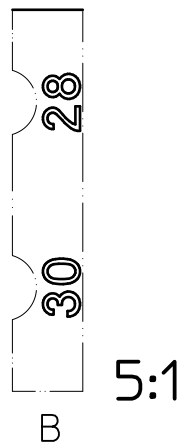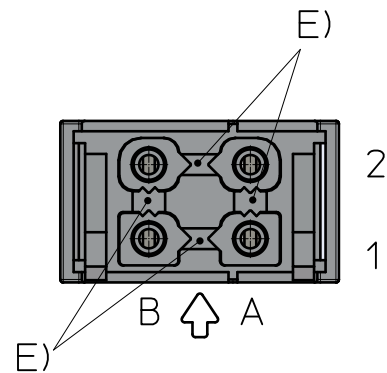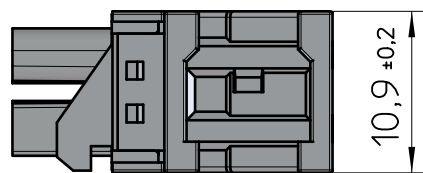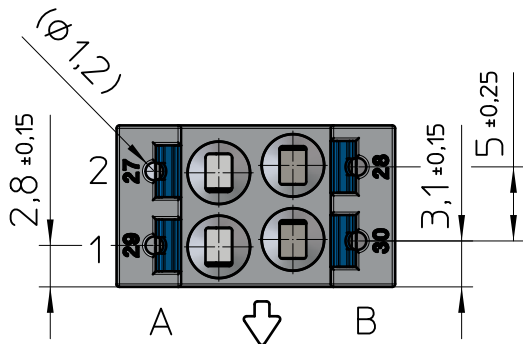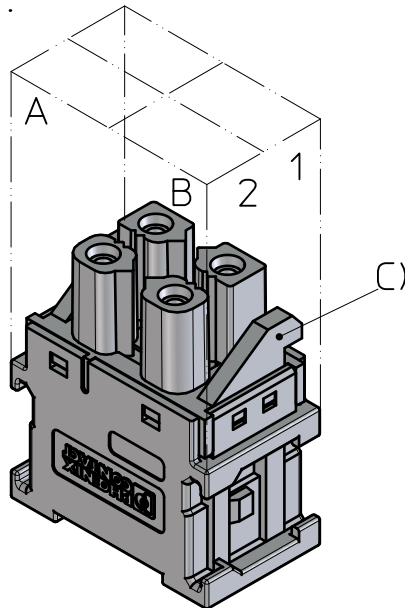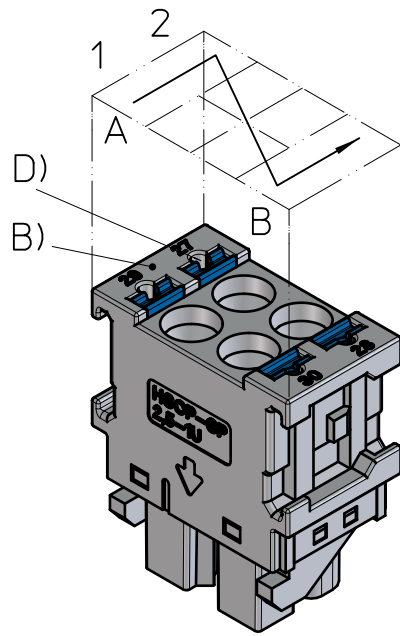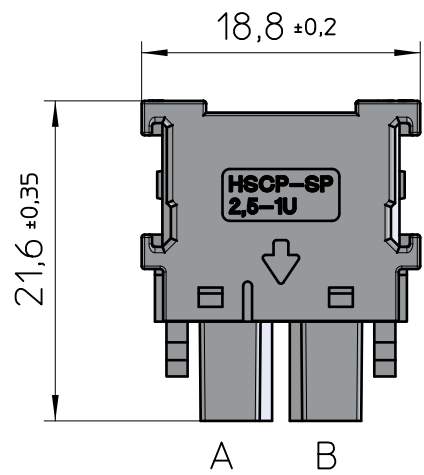

General Information


- Corresponding header HSCH 2,5
- Simplified representation
- Document excluded from change process
- Linear dimensions [mm]
- Tolerances are valid for dimensions at normal climate according to DIN EN ISO 291-23/50-2 and components with 2% moisture content (weight%)
- Web: www.phoenixcontact.com webcode: #0308

Color coding spring opener

color	similar RAL	code
black	9005	0
red	3013	2
orange	2011	3
yellow	1018	4
green	6021	5
blue	5015	6
white	9010	9

Description color placement

HSCP-SP...-1U...-A1A2/B1B2-....



Additional information:


A) Contact type

Wiring Diagram

schematic symbol	description	electrical symbol
	single contact	
	without contact	
	twin contact	

B) Marking area/layout

marking example with recommended font height

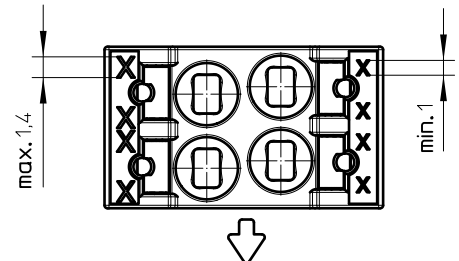

C) Lock & Release area

D) Opening for test tip suitable: MPS-MT 1-S4-B

E) Coding area for CP-DMC 1,5

Description coding placement

HSCP-SP-A (example)

Coding possibilities

Description	A	B	C	D	E	F
Coding Possibilities						

Coding possibilities for twin contact

Description	P	Q
Coding Possibilities		

1

2

3

4

5

6

7

8

A

B

C

D

E

F