


The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved, in particular the right to carry out patent, utility model or ornamental design registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem. §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen.
PHENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

Mechanische Daten (in Anlehnung an IEC 61076-2-101)		Material	
Polzahl / Codierung	- / -	Kontakte / Oberfläche	-
Kontaktanschlussart	-	Kontaktträger	-
Kontakt-Ø	-	Farbe	schwarz
Temperaturbereich	-40 °C bis +105 °C	Dichtung	EPDM
Schutzart	-		
Steckzyklen	-		

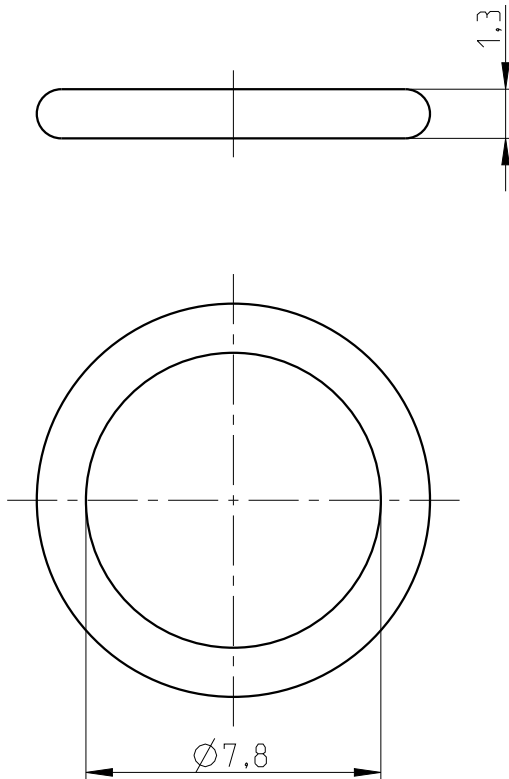


Shore-Härte: 70
Form- und Oberflächenabweichung nach ISO 3601-3: Sortenmerkmal N

Freimaßtoleranzen nach DIN ISO 3601			Technische Änderungen vorbehalten		Index 1 / 2024-03-13		Maßstab: 5:1		
	Datum	Name	Serie DSIV O-Ring Ø8x1,3					Blatt: 1 von: 1	
Bearb.	2018-01-10	Scheerer							
Gepr.									
			Zeichnungs-Nr.:	BS-Z0001_500			Dok.-Nr.:	001108757	
			Artikel-Nr.:	1026297					
			Artikelbezeichnung:	SACC-SEAL-M12FS-8X1,3/VPE 500					

The copying, distribution and utilisation of this document as well as the communication of the contents to others without expressed authorization is prohibited according to §18 UWG German Law. Offenders will be held liable for the payment of damages according to §19 UWG German Law. All rights reserved. in particular the right to carry out patent, utility model or ornamental design registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts gem. §18 UWG verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz (§19 UWG). Alle Rechte vorbehalten, insbesondere das Recht, Patent-, Gebrauchsmuster- oder Geschmacksmusteranmeldungen durchzuführen.
PHENIX CONTACT Connector Technology GmbH Heisenbergstrasse 1 D-71083 Herrenberg

Mechanical data (according to IEC 61076-2-101)		Material	
no. of poles / coding	- / -	contacts / surface	-
contact termination	-	contact carrier	-
contact-Ø	-	colour	black
temperature range	-40 °C to +105 °C	sealing gasket	EPDM
protection class	-		
mating cycles	-		

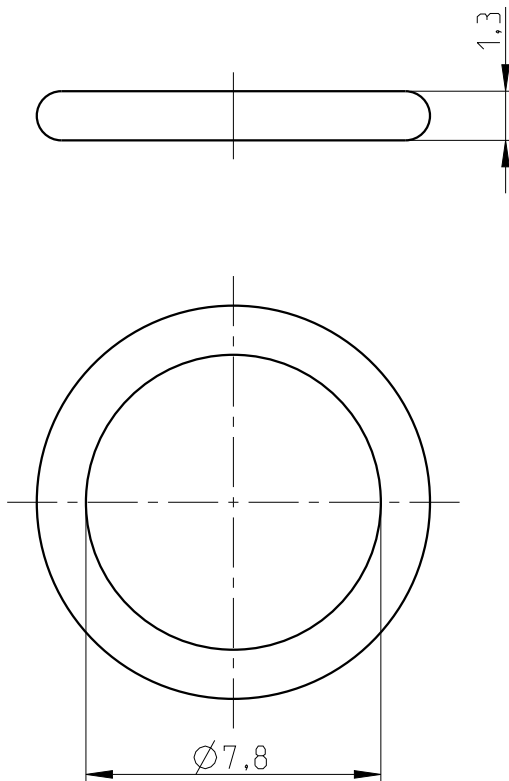

shore hardness: 70
shape and surface deviations acc. to ISO 3601-3: type feature N

general tolerance acc. to DIN ISO 3601			technical changes reserved		Index 1 / 2024-03-13		scale: 5:1		
	date	name	Series DSIV o-ring Ø8x1,3					page: 1 of: 1	
design	2018-01-10	Scheerer							
chk.									
			drawing-no.:		BS-Z0001_500		doc.-no.:	001108757	
			order-no.:		1026297				
			article designation:		SACC-SEAL-M12FS-8X1,3/VPE 500				