



Installation recommendation M16x1,5 for SACC.... design DSI PUSH-PULL


mounting with flat gasket
(thread without chamfer)
can be screwed from the rear

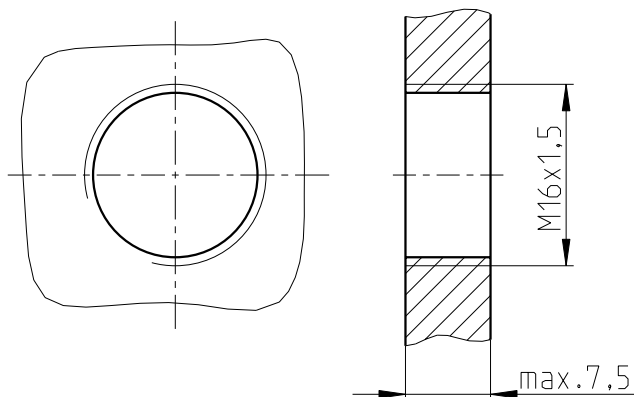


mounting with o-ring
(thread with chamfer)
can be screwed from the rear

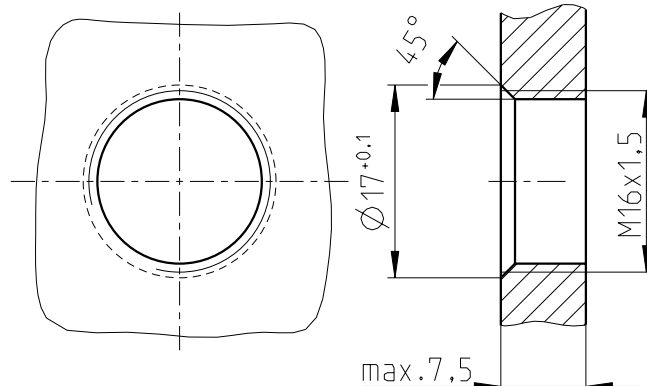


mounting with flat gasket
(through hole without chamfer)
can be screwed from the front

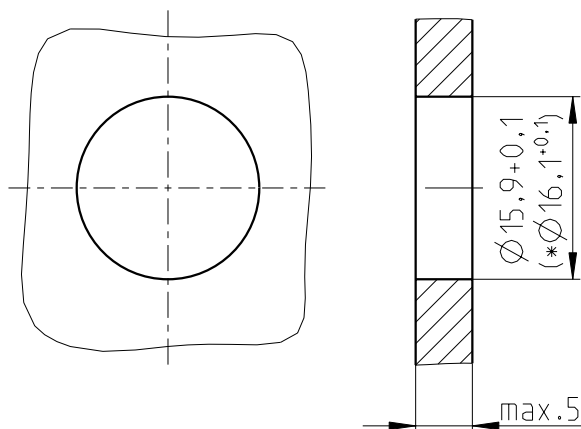

mounting with o-ring
(through hole with chamfer)
can be screwed from the front

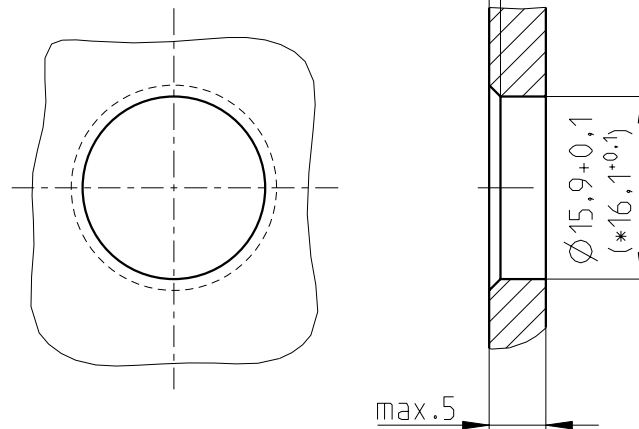

mounting with flat gasket and o-ring
(cut-out with anti-twist protection without chamfer)
can be screwed from the front

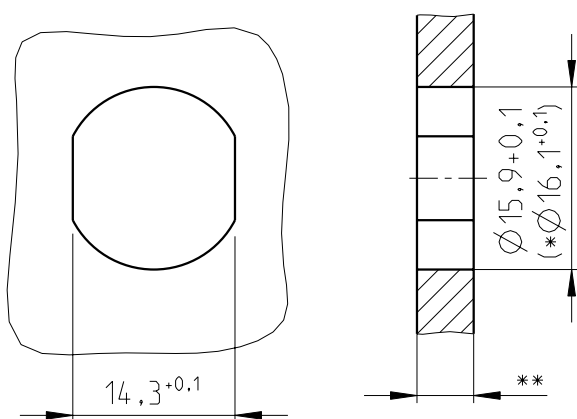

Installation recommendation only valid for housings
with bevels (anti-twist protection)!

tightening torque:
flat gasket 2-3Nm
o-ring 2-3Nm

* $\varnothing 16,1+0,1$ at centered mounting
** Front panel thickness max.5mm.
If <2mm technical features
could be limited.

	data	name
design	2017-08-09	Scheerer



technical changes reserved

doc.-no.: 01074046

Index 1 / 2020-02-12