

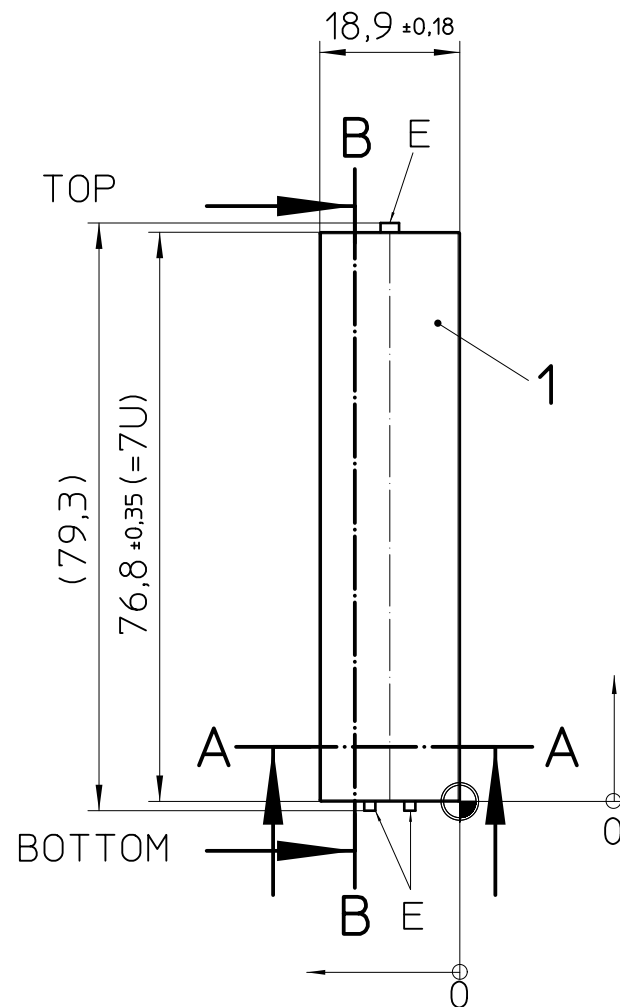
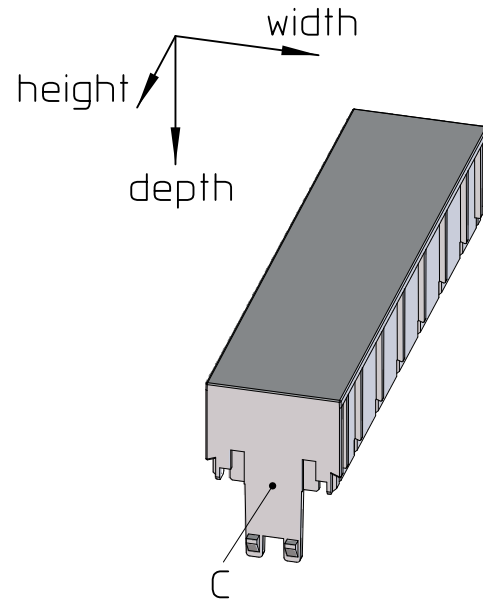
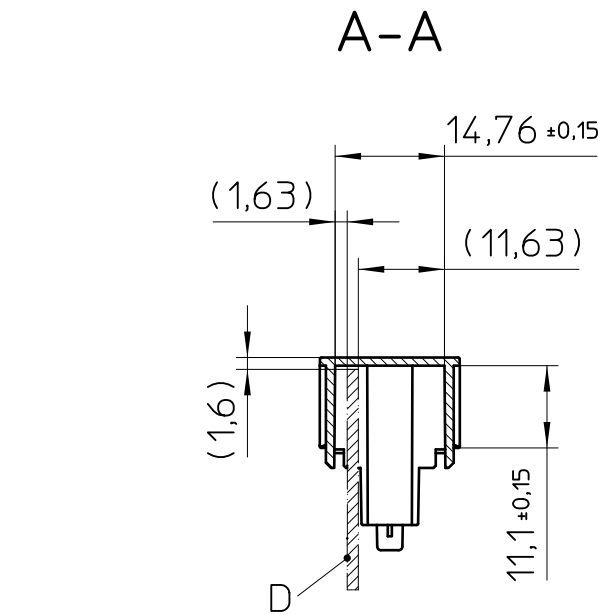


## Marking area

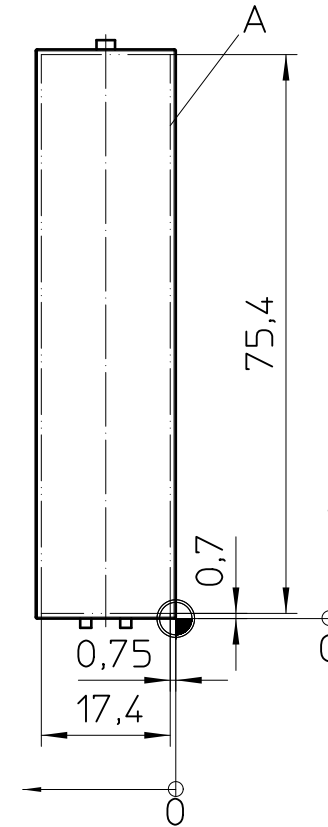

## Machining area

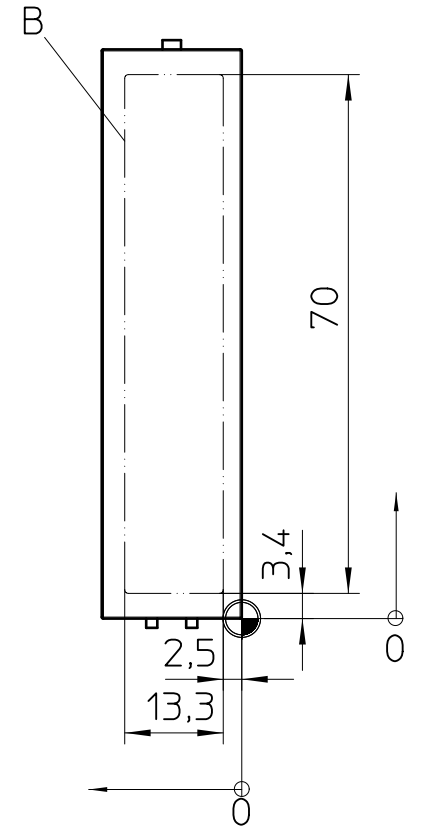

### General Information:

- Simplified representation, exemplary shown in gray.
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Workpiece zero point for mechanical processing
- Tolerances for marking and machining DIN ISO 2768-m
- For milling > 50% of the machining area, the machinability should be verified.
- In case of distortion there is no functional impact of the single part in the application.
- Web: [www.phoenixcontact.com](http://www.phoenixcontact.com) webcode: #1635

### Additional Information:

- A. Max. marking area
- B. Max. marking area (minimum radii R0,5)
- C. Bottom side
- D. PCB position (t=1,5)
- E. Latching point between Cover and Housing

| ME-IO 18,8 C 7U |     |             |          |
|-----------------|-----|-------------|----------|
| Pos.            | QTY | Description | Material |
| 1               | 1   | COVER       | PA       |

|                                                                                              |  |                                           |  |                    |              |
|----------------------------------------------------------------------------------------------|--|-------------------------------------------|--|--------------------|--------------|
|  DIN A3 |  | document-No. / RI<br>01185900 / 03        |  | date<br>29.04.2025 | scale<br>1:1 |
|         |  | ident.-No.<br>1037321                     |  |                    |              |
|                                                                                              |  | document-type<br>TECDOC 2D_Productdrawing |  |                    |              |
| page 1 of 1                                                                                  |  | description<br>ME-IO 18,8 C 7U 7016       |  |                    |              |