
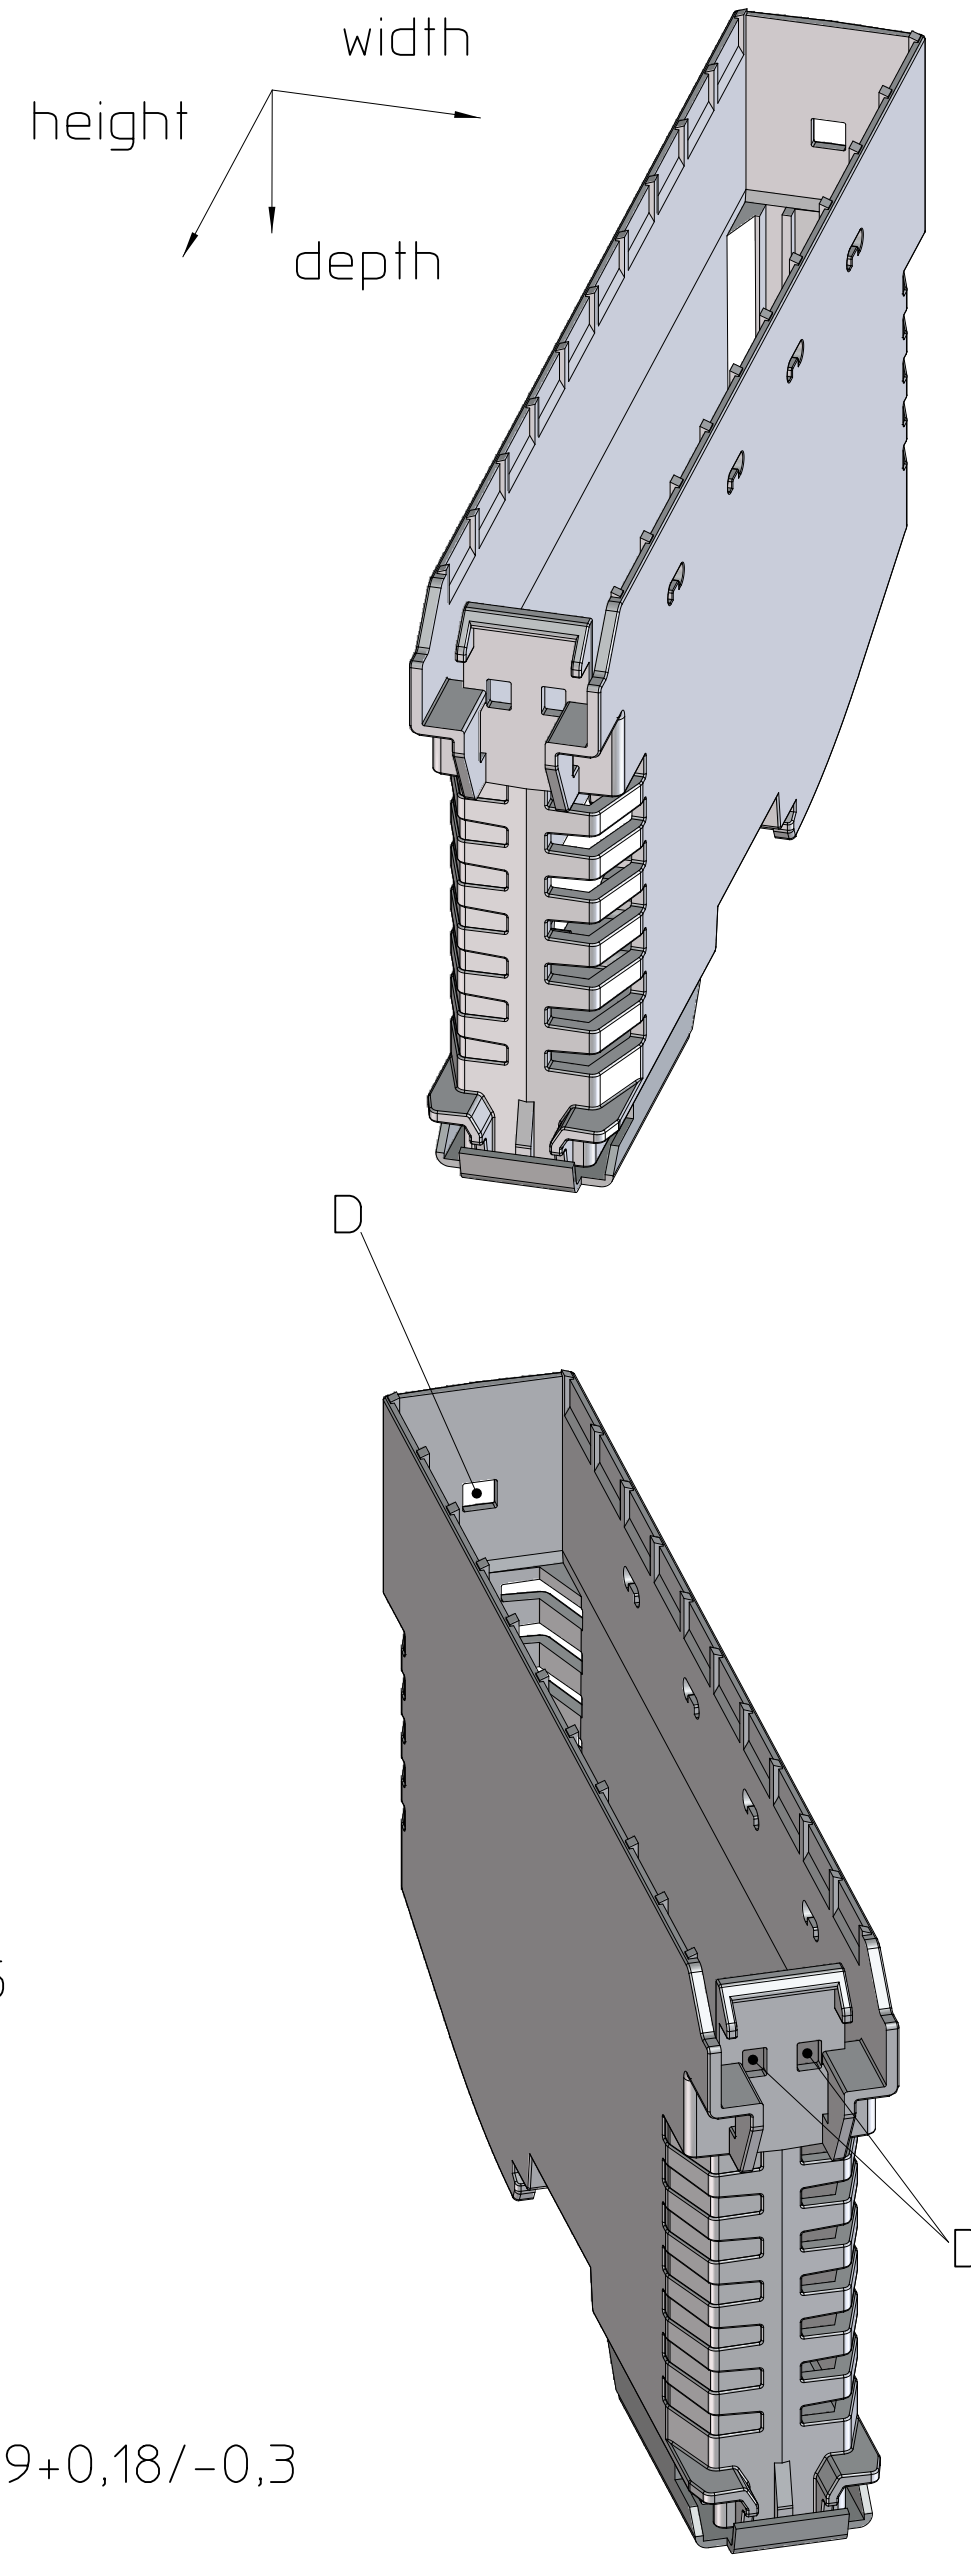
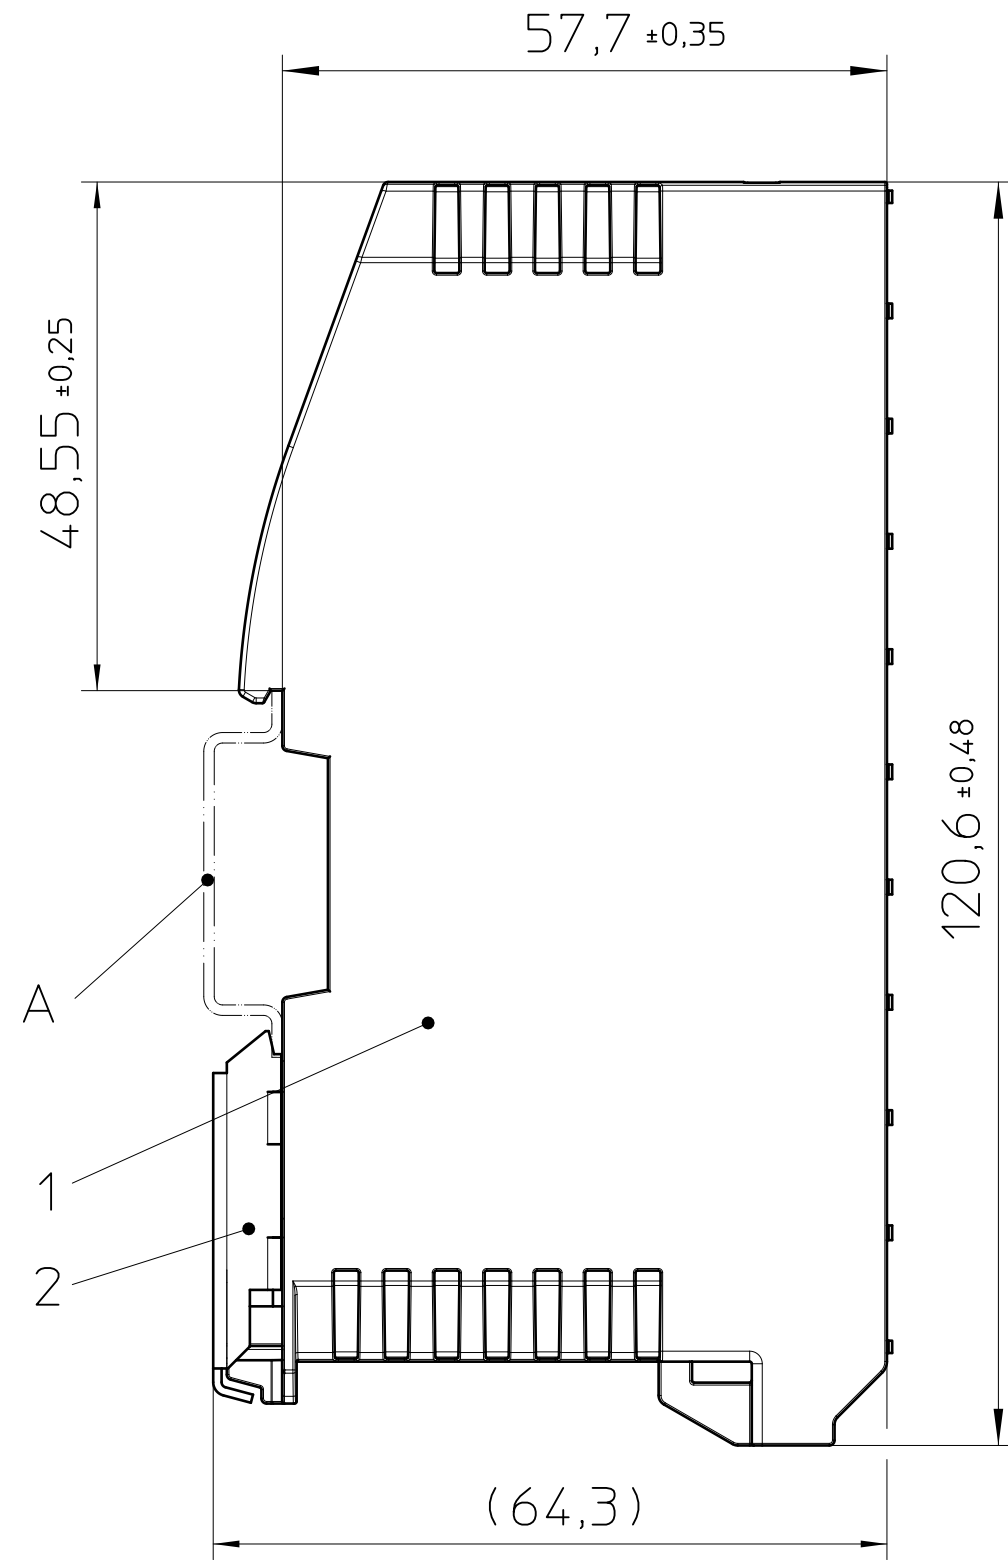


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

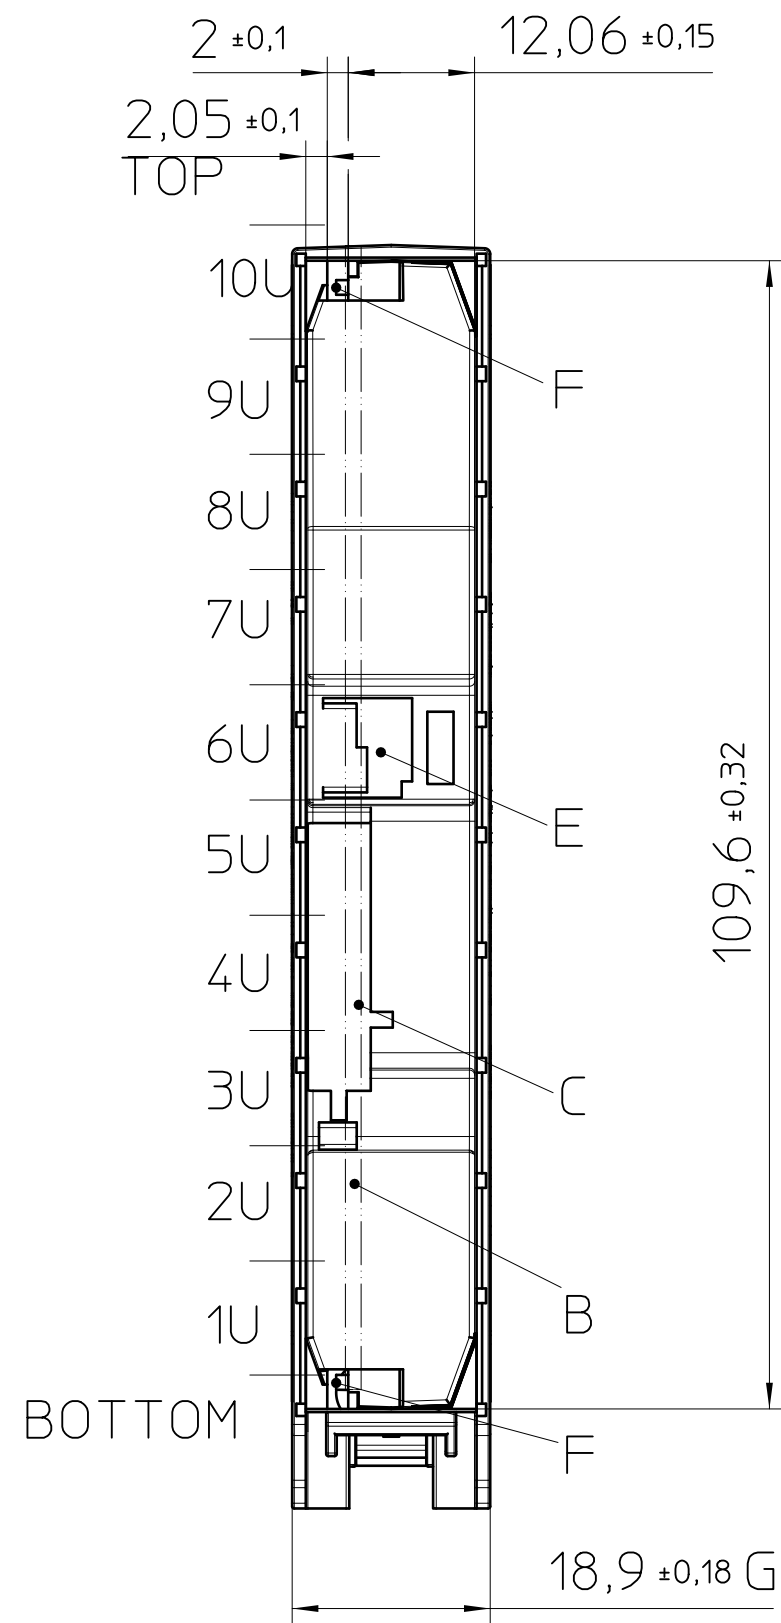


General Information:

- Simplified representation
- Document excluded from change process
- Units are in millimeters [mm] and degrees [°]
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- Web: www.phoenixcontact.com webcode: #1635
- In case of distortion there is no functional impact of the single part in the application.

Additional Information:

- A. Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar EN 60715, TH 35-15x1,5
- B. PCB $t=1,6\pm0,2$
- C. Guidance slot for TBUS . . .
- D. Opening for fixing ME-IO Cover . . .
- E. Opening for ME BUS FE CONTACT
- F. PCB Fixing
- G. Housing color blue (5015) / yellow (1018) $18,9+0,18/-0,3$



ME-IO 18,8 B 10U TBUS		
Pos.	QTY	Description
1	1	HOUSING (PA)
2	1	FOOT CATCH with SPRING (St,X12CrNi)

 DIN A3	document-No. / RI		date	scale
	00907884 / 04		28.04.2025	1:1
	ident.-No.		document-type	
		1037434	TECDOC 2D_Productdrawing	
page 1		of 2	description	
			ME-IO 18,8 B 10U TBUS 7016	

B

A



Marking area

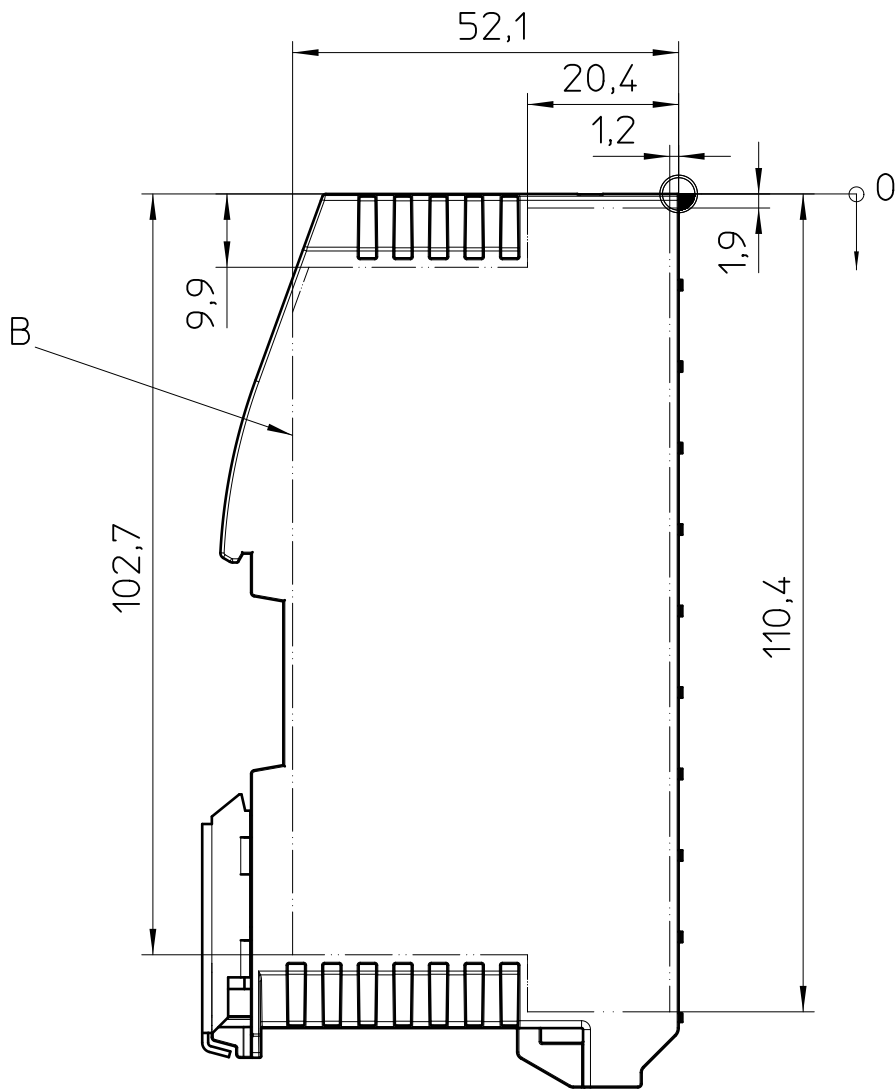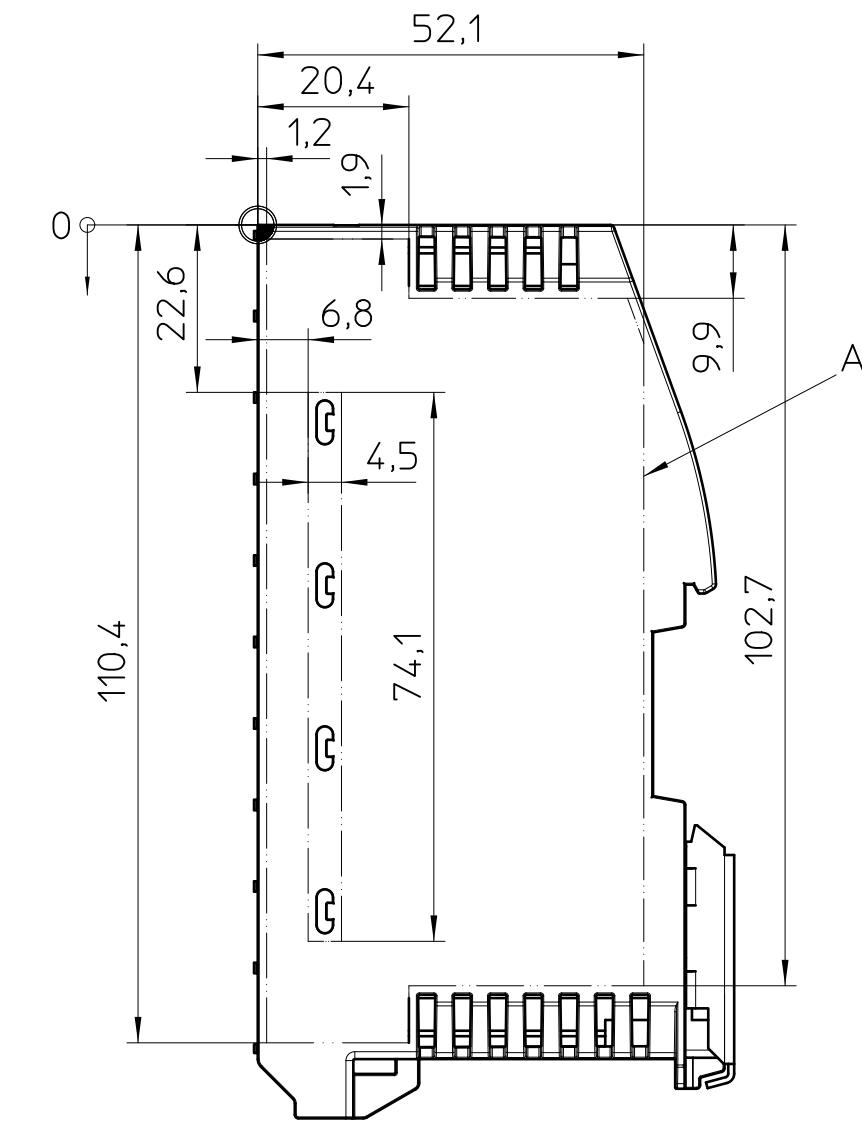

B

A

Machining area

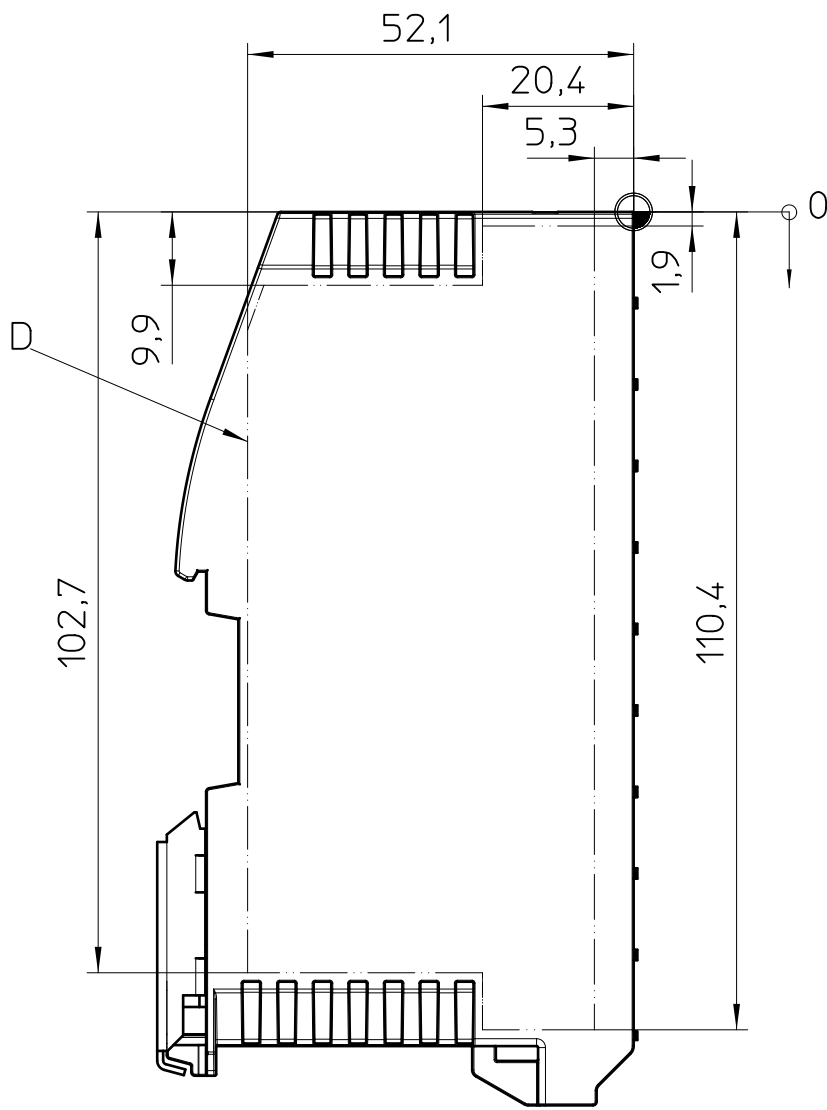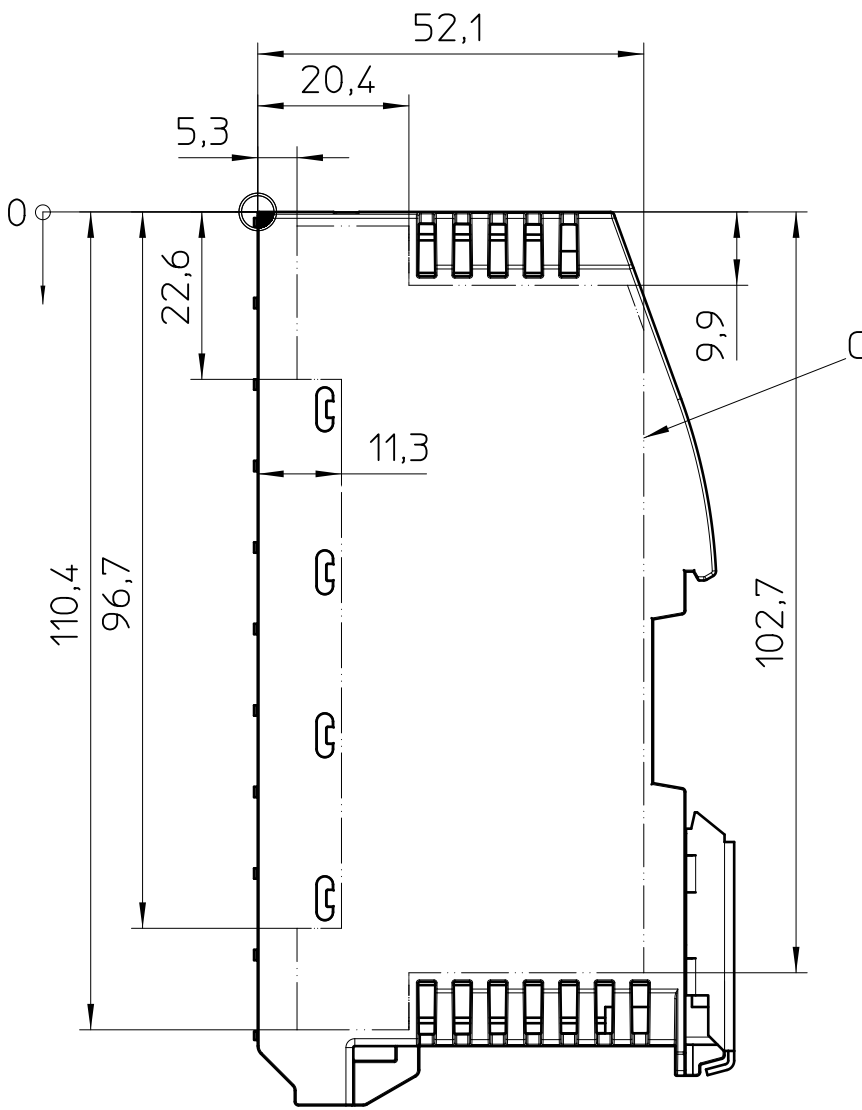

D

F

- General Information:
- Simplified representation
 - Document excluded from change process
 - Units are in millimeters [mm] and degrees [°]
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 -  Workpiece zero point for mechanical processing
 - Tolerances for marking and machining DIN ISO 2768-m
 - For milling > 50% of the machining area, the machinability should be verified.
 - In case of distortion there is no functional impact of the single part in the application.
 - Web: www.phoenixcontact.com webcode: #1635

- Additional Information:
- A. Max. marking area right
 - B. Max. marking area left
 - C. Max. machining area right
 - D. Max. machining area left

 DIN A2		document-No. / RI 00907884 / 04	date 28.04.2025	scale 1:1
 PHOENIX CONTACT		ident.-No. 1037434	document-type TECDOC 2D_Productdrawing	
		description ME-IO 18,8 B 10U TBUS 7016		
page 2 of 2				