

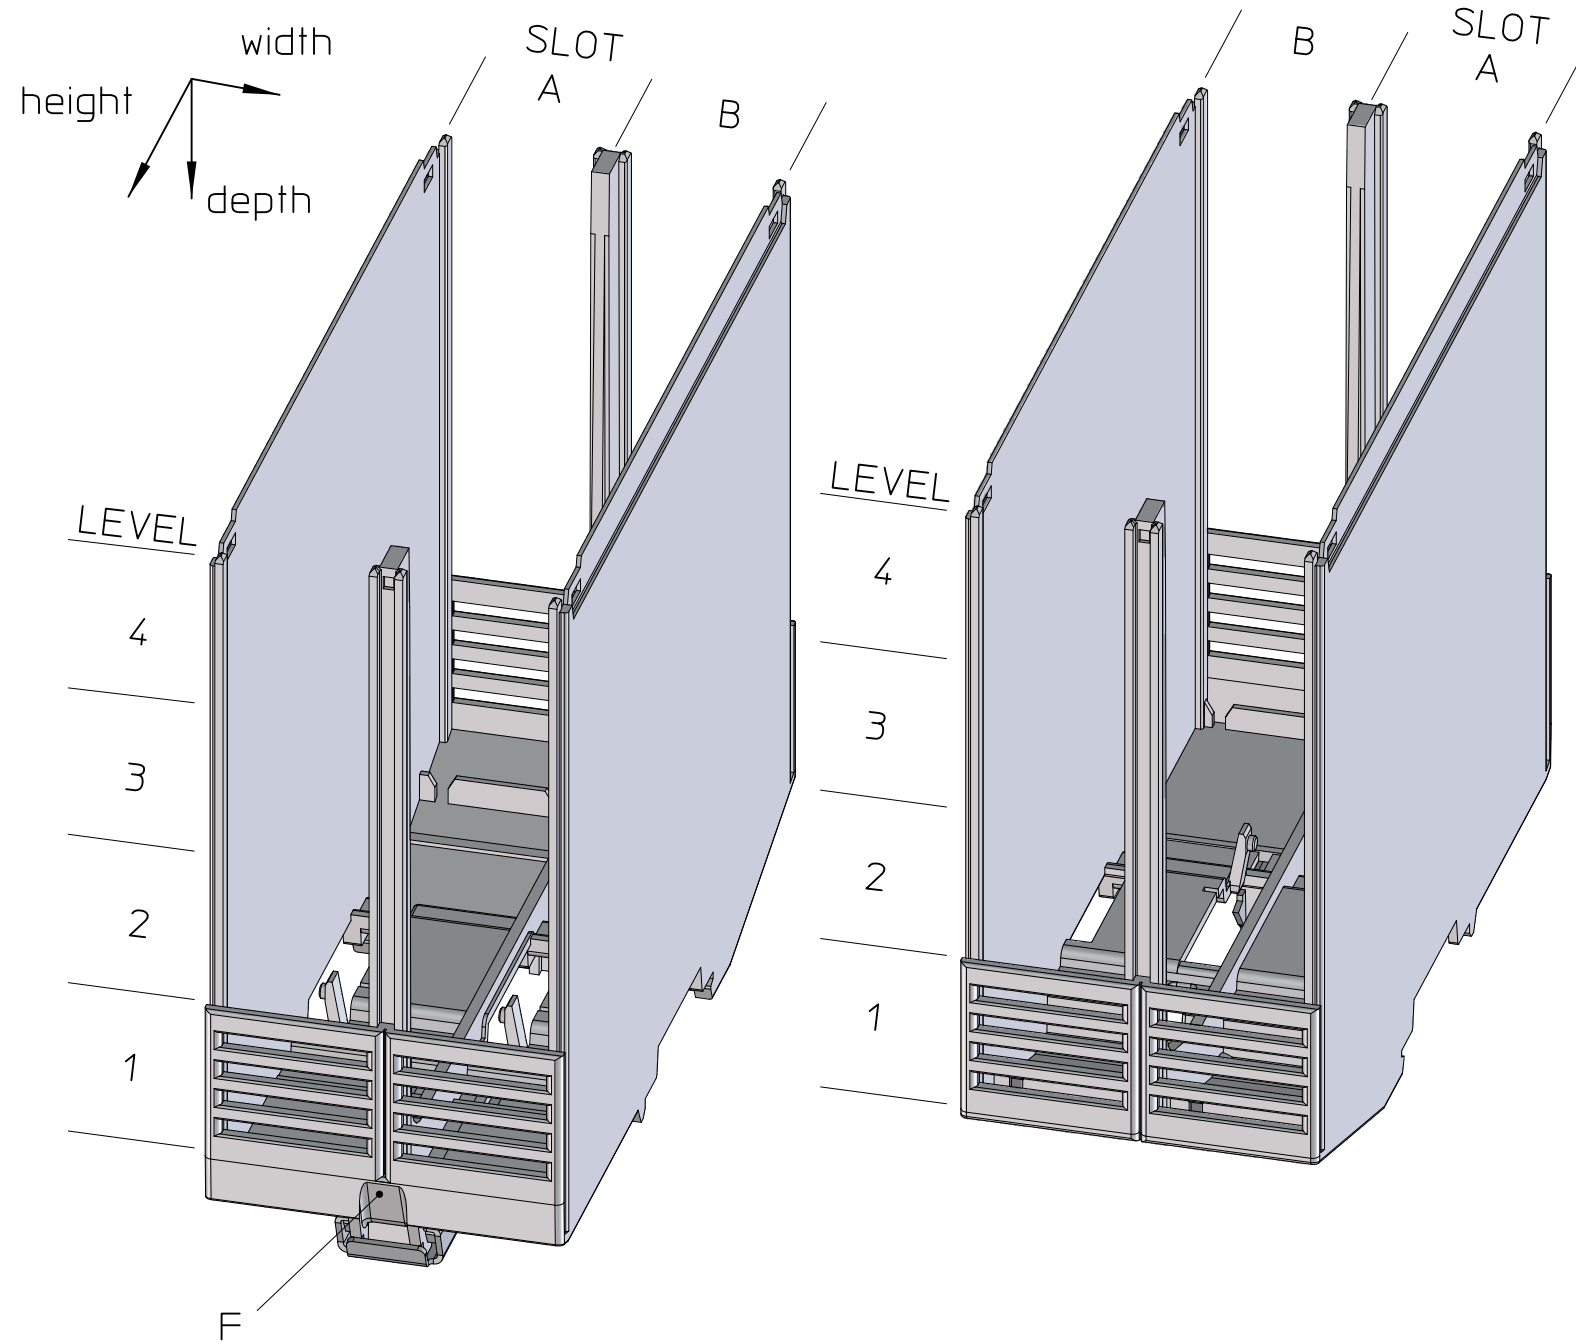
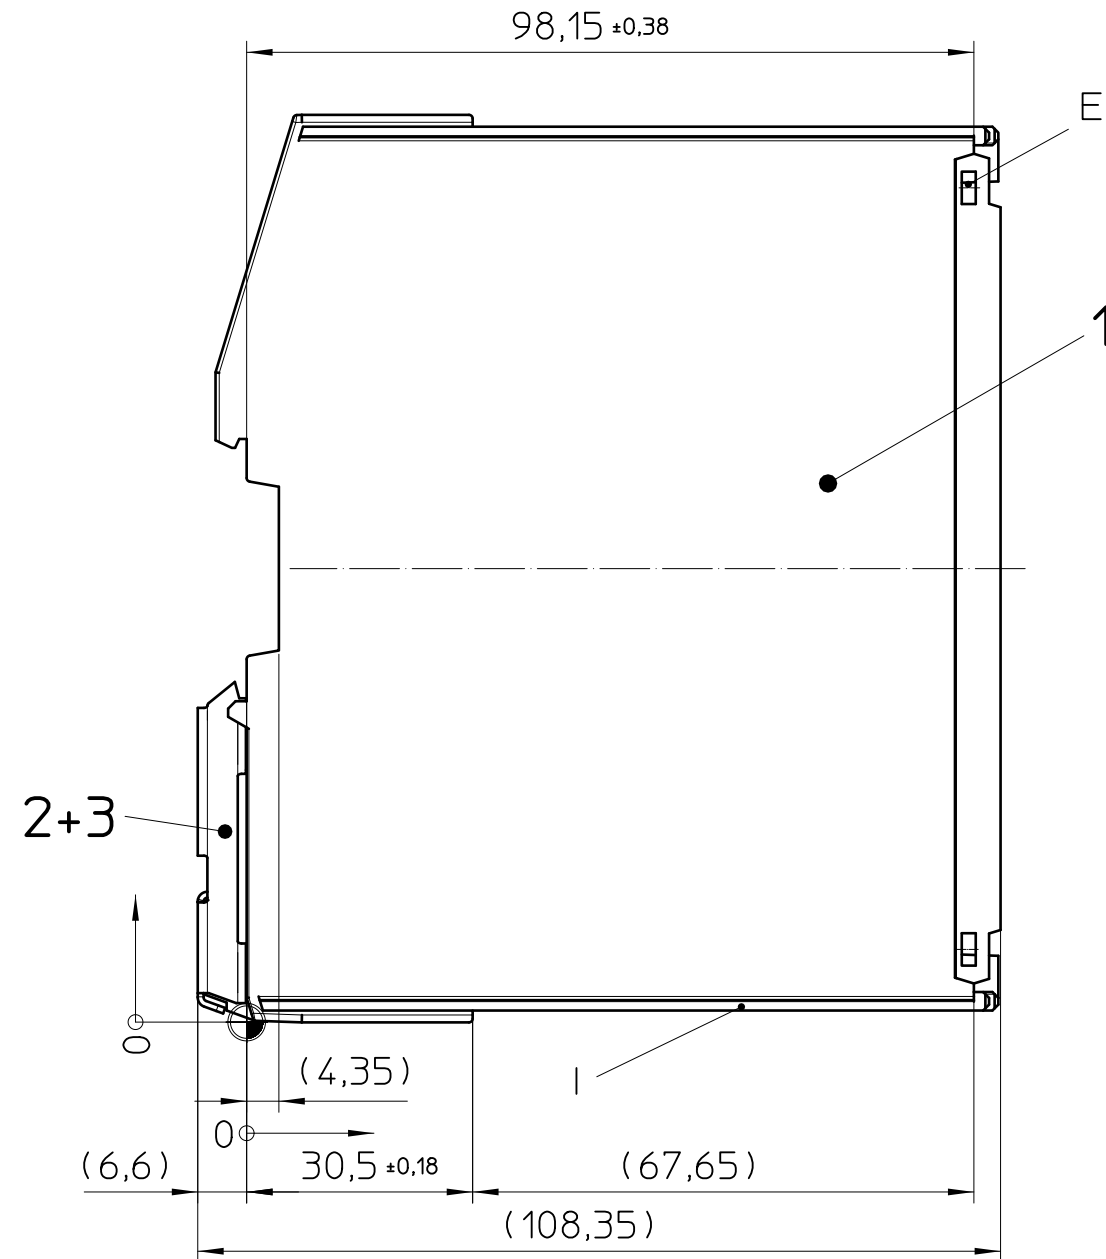


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten. Bauartbedingtes Spiel ist in den Toleranzangaben nicht berücksichtigt.

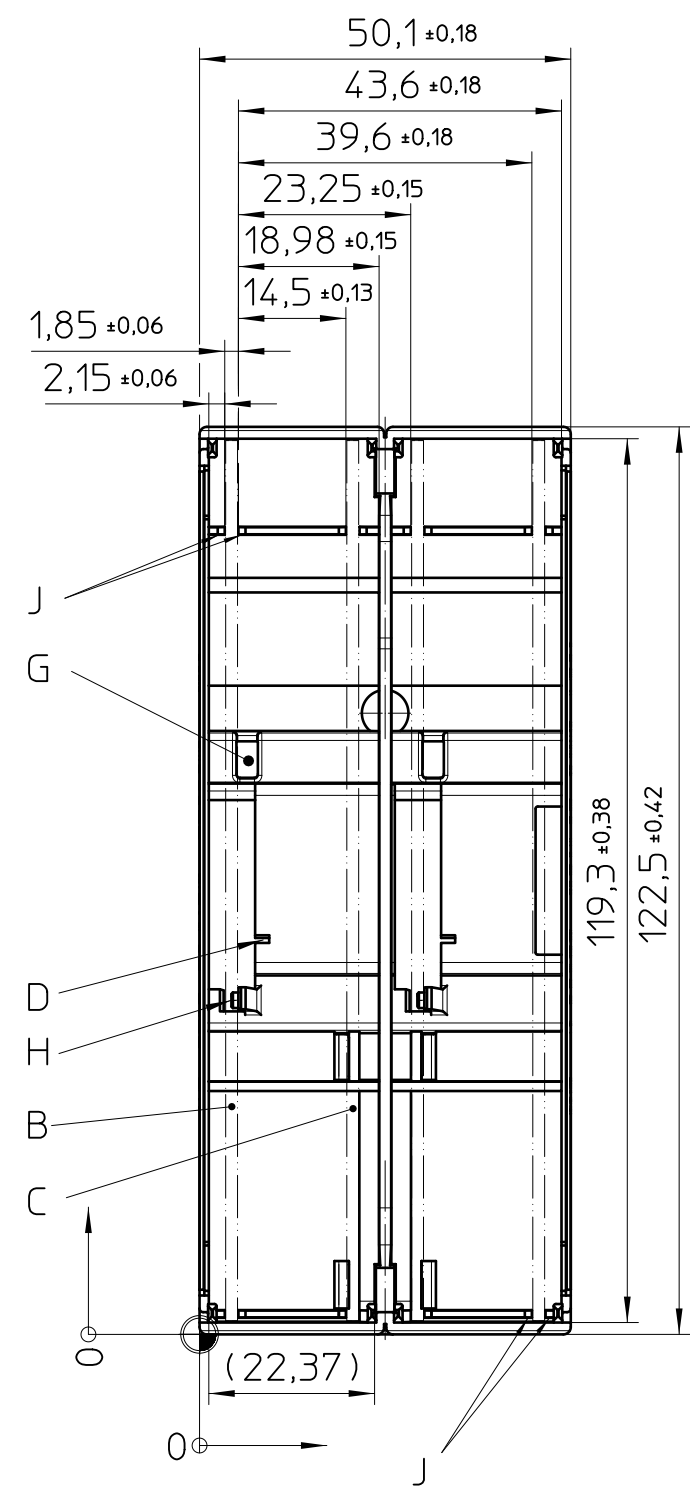

BOTTOM PART

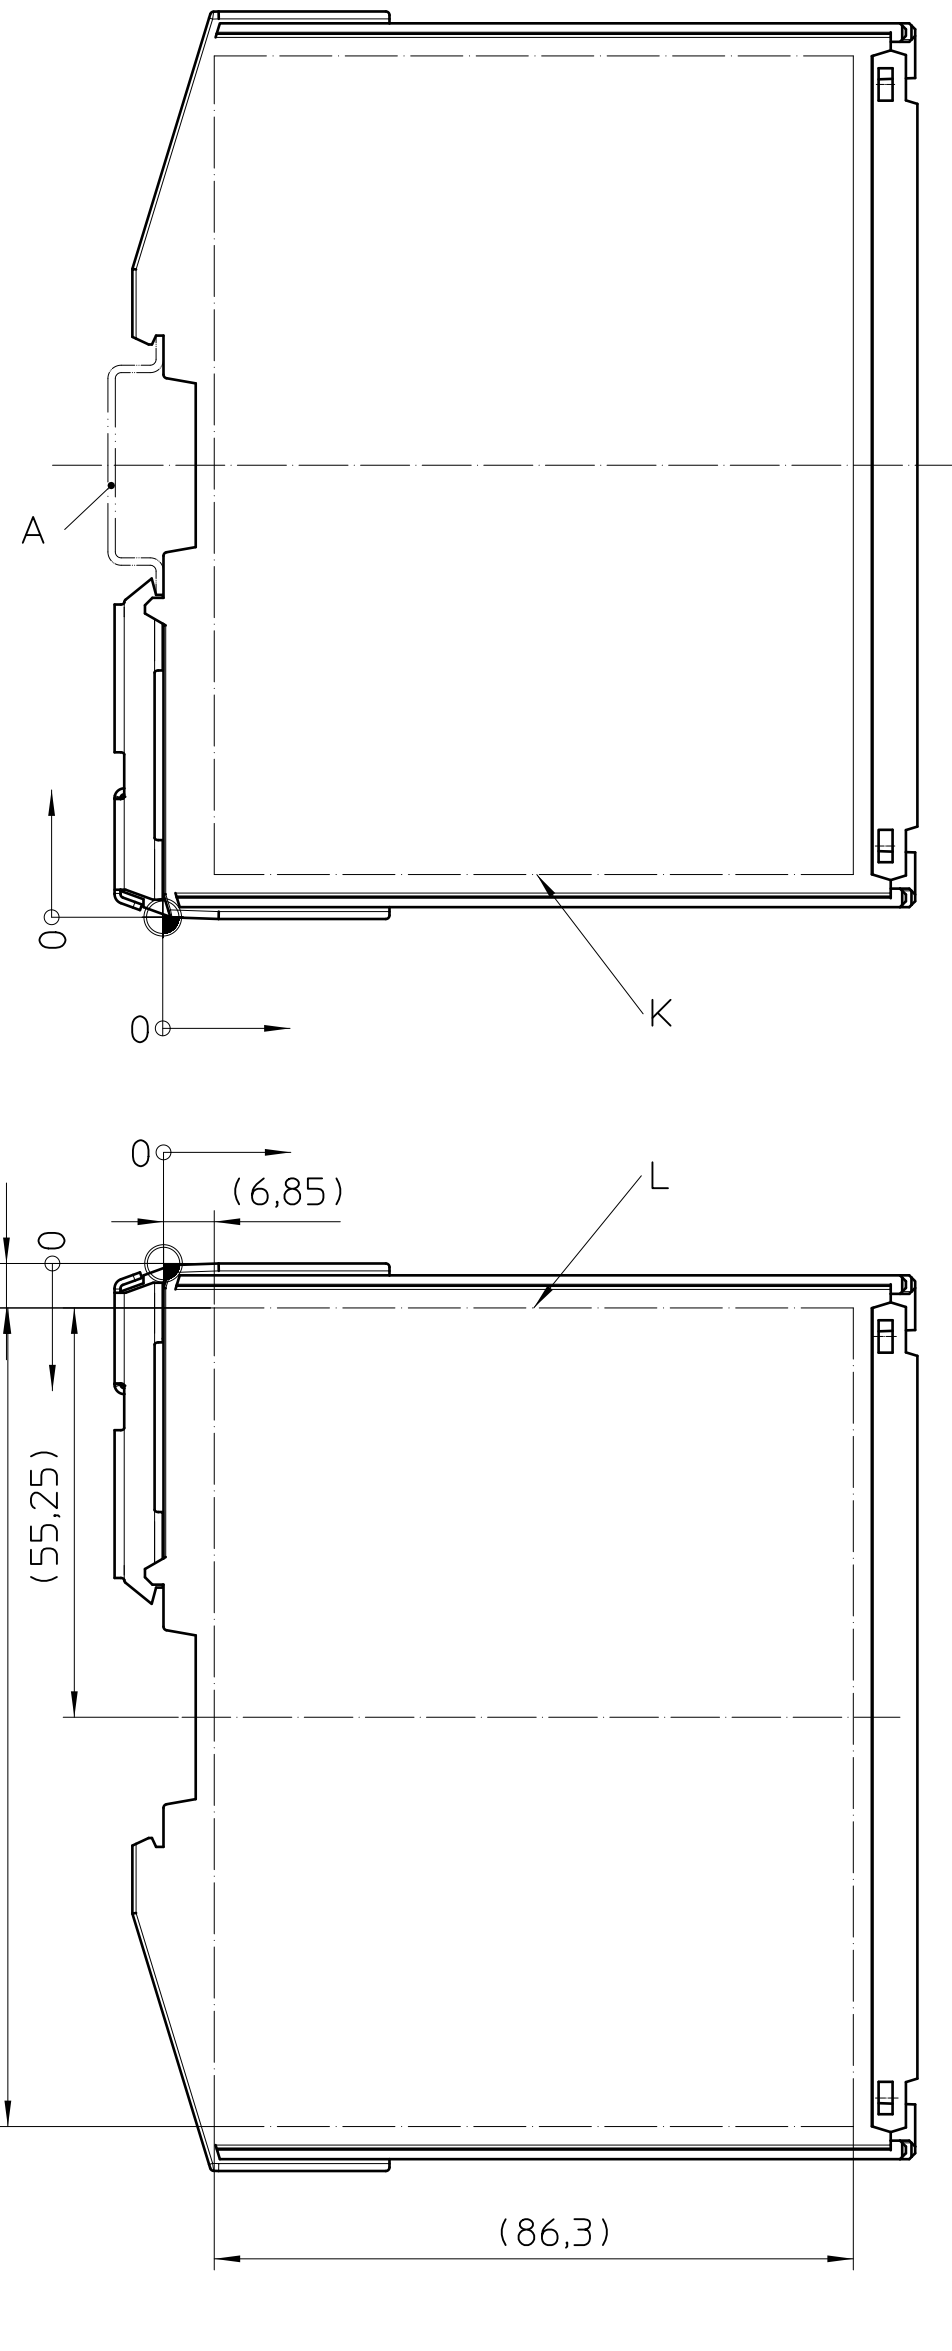

- General Information:
- Simplified representation, exemplary shown in gray
 - Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
 - Workpiece zero point for marking processing
 - Tolerances for printing DIN ISO 2768-m
 - Web: www.phoenixcontact.com webcode: #1635

- Additional Information:
- A. Mounting rail like EN 60715, TH 35-7,5 or mounting rail similar EN 60715, TH 35-15x1,5
 - B. Main PCB $t=1,6\pm0,2$
 - C. Second PCB $t=1,6\pm0,2$
 - D. Guidance slot for TBUS8 . . .
 - E. Opening for fixing ICS50-C122 . . . or ICS50-TL122 . . .
 - F. Notch for locking release, by screw driver
 - G. Opening for ICS-FE-CONTACT
 - H. Fixing PCB
 - I. Guidance for ICS25-F . . . or ICC25 . . .
 - J. PCB guidance
 - K. Marking area left
 - L. Marking area right

Pos.	QTY	Description	Material
1	1	BOTTOM PART	PA
2	1	FOOT CATCH	STL, Zn plated
3	1	SPRING	STL

 DIN A2		document-no. / r / article-no. 01215230 / 03 / 1076907		scale 1:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date document-type 28.08.2024 TECDOC 2D_Productdrawing			
page 1 of 1		description ICS50-B122X98-V-V-5015			